


Thank you for your purchase of this Diode Dynamics Wiring Harness. Using standard Deutsch DT style connectors, this harness can be used for Stage Series LED Light bars, or other power supply needs. Basic installation instructions are included below. Please contact us if you have any questions.



1. Determine a suitable location to mount the relay. (A) We recommend a location that is near the battery.
2. Determine a suitable location to mount the switch and route the switch to that location. This may require going through the vehicle's firewall. We recommend unplugging the toggle switch from the harness to route the wires more easily. Drill an appropriate-sized hole for the switch. Then reconnect the wires to the switch and mount it (B).
3. Connect the wiring harness to the light bar (C). Next, route the harness to the battery. Be sure to avoid areas with excessive heat buildup or moving parts. We recommend following the path of the vehicle manufacturer's wiring harness.
4. Connect the split ring terminals on the wiring harness to the battery (D). The black (ground) wire should be connected to the negative battery terminal and the red (power) wire should be connected to the positive battery terminal.
5. Test thoroughly and aim the light bar in the desired direction. ***Please check your local laws and regulations for aiming, installation, and applicability.***

**Kit Includes:** 50" LED Light Bar, Mounting Hardware, Deutsch DT Connector

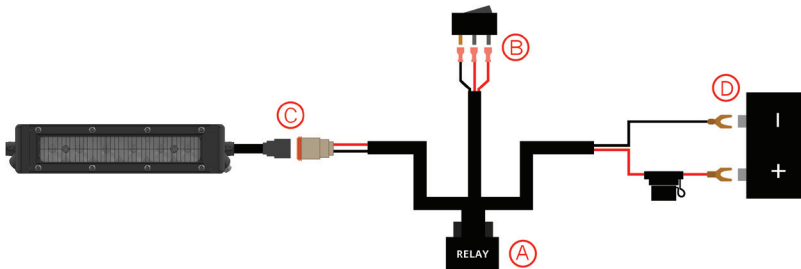

## Features

- Advanced TIR (total internal reflection) optics
- High intensity 6000K Lumileds LEDs
- Slim design, for easy mounting
- Durable aluminum extrusion
- Pressure equalizing vent to eliminate condensation

## Specifications

- Input Voltage: 9-24VDC
- Input Power: 259 watts
- Current Draw: 18.5 amps @ 14V
- Operating Temperature: -40° to 185°F
- Weight: 8.2 lbs


## Wiring

Connect the red wire to positive supply, and black wire to negative or common ground.


**Please note:** This auxiliary lamp draws high current, and requires adequately-sized wiring for safe operation. If you are not using a Diode Dynamics wire harness, use wire sized 16 AWG or larger. Please be mindful of current ratings and wire size, especially if splitting power signals to multiple light bars, or using switches. If you have any questions, please feel free to contact us for assistance.

## Mounting

If you wish, you may use the included hardware to mount your light bar. A number of fasteners are included, and can be used as you see fit. The most common mounting style is shown below. Stage Series Light Bars are also compatible with most standard mounting brackets on the market. Reference the dimensions on opposite side to determine the best mounting solution for your application.

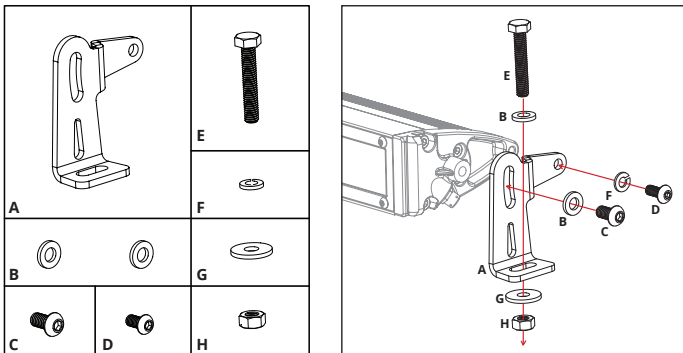

## Dimensions

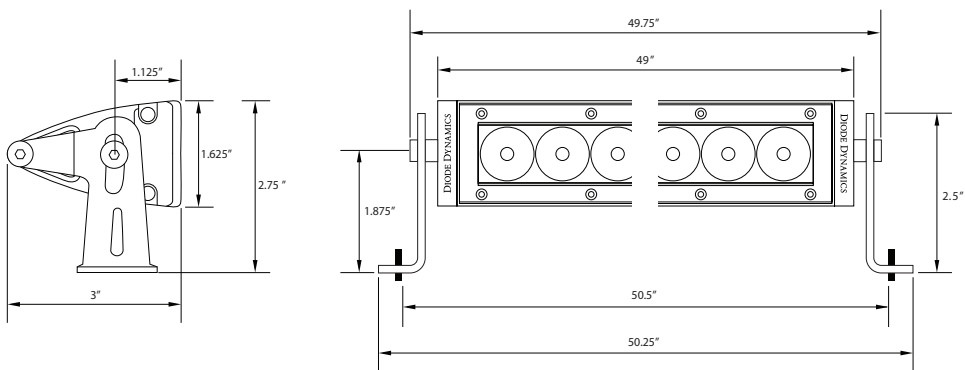


## Output


### Driving



### Flood



### Combo



- A** - lux at 10 meters  
**B** - Distance (m) with 1 lux  
**C** - Distance (m) with .25 lux

SS <sub>50</sub> 50" Light Bar		A	B	C		
Lens Color/Optics	cd*	Illuminance (lx)			Measured Output	Output Color
White Driving	440,000	4,400	663	1,330	11,200 lumens	6000K White
White Flood	16,000	160	126	250	11,200 lumens	6000K White
White Combo	325,000	3,340	570	1,140	11,200 lumens	6000K White
Amber Driving	264,000	2,640	514	1,030	6,400 lumens	2000K Amber
Amber Flood	9,600	96	98	200	6,400 lumens	2000K Amber
Amber Combo	245,800	2,004	496	990	6,400 lumens	2000K Amber

\* PEAK BEAM INTENSITY

This installation guide is for the following SKU:

**DD5021** SS50 White Driving Light Bar  
**DD5035** SS50 White Combo Light Bar  
**DD6039** SS50 White Flood Light Bar

**DD5043** SS50 Amber Driving Light Bar  
**DD5057** SS50 Amber Combo Light Bar  
**DD6047** SS50 Amber Flood Light Bar



## Specifications

LENS COLOR/OPTICS	PEAK BEAM INTENSITY (CANDELA)	ILLUMINANCE (LUX @ 10M)	MEASURED OUTPUT (LUMENS)	RAW OUTPUT (LUMENS)	OUTPUT COLOR
White Driving	440,000 cd	4,400 lux	11,200 lm	18,240 lm	6000K White
White Combo	325,000 cd	3,340 lux	11,200 lm	18,240 lm	6000K White
White Flood	16,000 cd	160 lux	11,200 lm	18,240 lm	6000K White
Amber Driving	264,000 cd	2,640 lux	6,400 lm	9,120 lm	2000K Amber
Amber Combo	245,800 cd	2,004 lux	6,400 lm	9,120 lm	2000K Amber
Amber Flood	9,600 cd	98 lux	6,400 lm	9,120 lm	2000K Amber

Color Temp (CCT): 6000K

Beam Angle: Driving, 20°x8°, Combo (Driving and Flood), Flood, 80°x50°

Power (watts): 259

Operating Voltage: 9-16V

Current (amps @ 13.2V): 18.5

Polarity: Polarity Specific

Operating Temperature: -40C to 85C (-40F to 185F)

LED Emitter: Luxeon Z E5

Connector(s): Deutsch DT Input

Materials: Aluminum PCB, Polycarbonate Lens, Aluminum Heatsink

Cooling: Passive, heatsink

Intrusion Ratings: IP68 Waterproof

Product Dimensions (in): 49x3x1.63 If you would like CAD for your project, please contact us.

When it comes to quality off-road lights, Diode Dynamics is the brand you can depend on.