

Installation Guide for 17-23 Tesla Model 3 / 20-24 Model Y Headlights Converter for Stock Reflector Headlights

NOTE: Some vehicle require the DRL harness installed for the headlight to function properly.

Do NOT use dielectric or any type of weather sealing grease on connectors or sockets.
Doing so will result in connection problems and will not be covered under warranty. Please click [HERE](#) for further explanation.

Table of Contents


- PART I - Remove Headlights
- PART II - Install Headlights

Disclaimer: This installation article is a tutorial guide. By reading this article, you agree it is for reference only and AlphaRex USA and its distributors make no guarantee on the finished results. Under no circumstances whatsoever shall AlphaRex USA nor its distributors be liable for any damage, misuse or personal injuries. If you do not fully understand the installation procedure, it is highly recommended that you seek help from professional mechanics to do the installation.

PART I - Remove Headlights

STEP 1 Disconnecting the Headlight Connector

Please be advised that certain features of your ALPHAREX headlights may not operate as expected due to recent Tesla software updates. To address this issue, we provide a specialized converter designed to update your headlights system and ensure optimal functionality. Kindly follow the instructions below for the installation process.

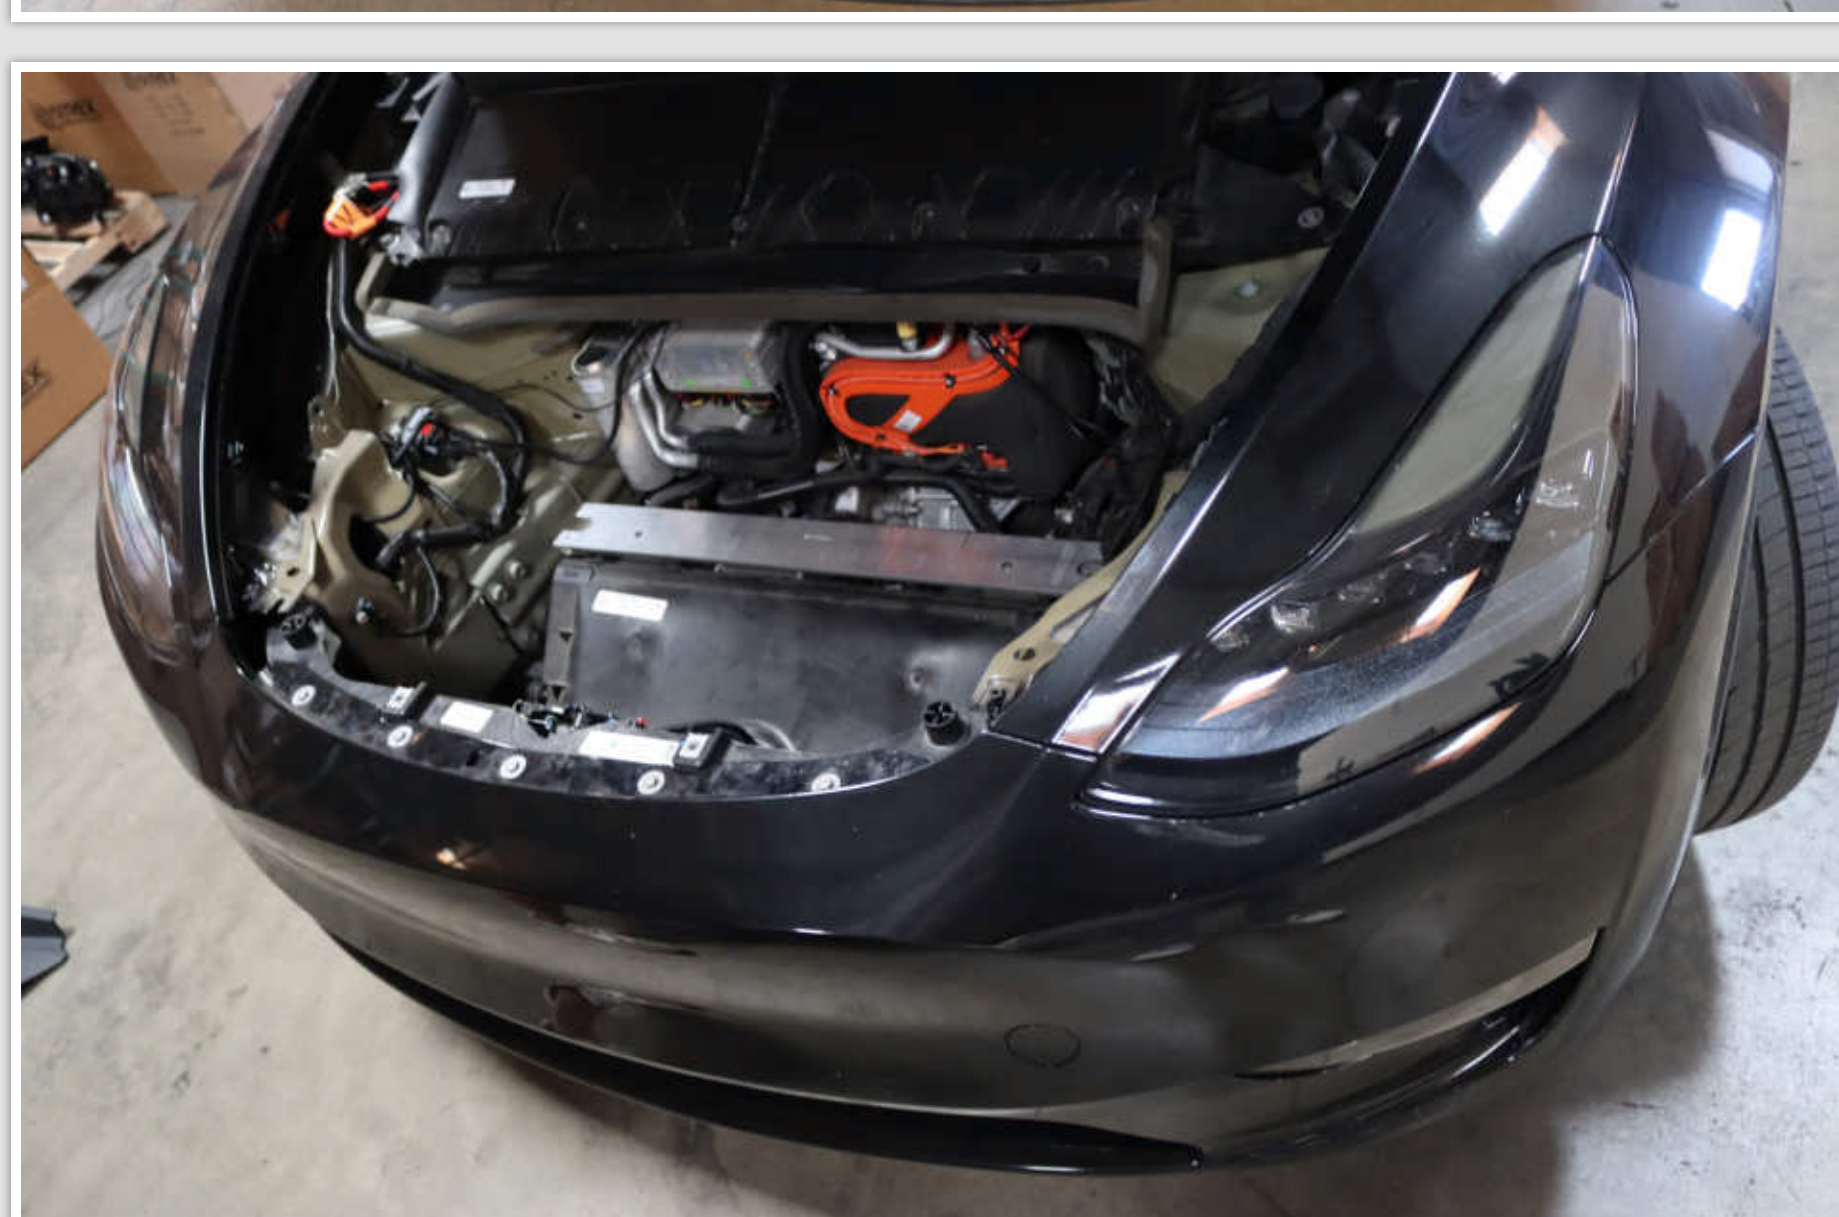

PART II - Install Headlights

STEP 2 Installing Headlight Converter

Proceed by attaching the converter connector to the ALPHAREX headlight unit, and then connect it to the vehicle's lights connection DO NOT USE DIELECTRIC GREASE!



To finalize the installation, kindly follow the same process for the other side of the headlight.