



*If the sticky suction base becomes dirty or loses stickiness, rinse under warm water with mild liquid soap and let air dry.

To attach magnet head to the mount, slide ring over 17mm ball. Adjust angle and tighten adjustment ring to secure. Remove paper backing of adhesive metal plate. Firmly press the adhesive side to clean, back surface of your smartphone or case.

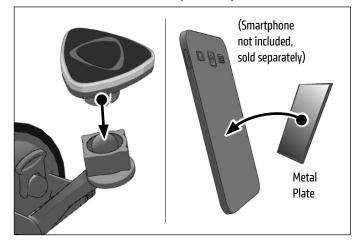

Place metal plate on the smartphone in contact with the magnet head on the pedestal to attach. Rotate or adjust angle as needed.

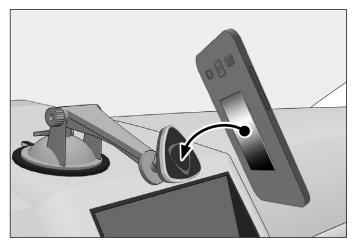


Package Contents:

(1) GN079 - Sticky Suction Windshield or Dash Mounting Pedestal (1) AP013 - Optional Adhesive Dash Mounting Disk (1) SPIRMAC - Magnet Head with Adjustment Ping and Adhesive Metal Plate


(1) SPIBMAG - Magnet Head with Adjustment Ring and Adhesive Metal Plates

DASHBOARD MOUNTING WARNING: THE STICKY SUCTION PEDESTAL SHOULD NOT BE USED ON SOME TYPES OF DASHBOARDS. IT MAY LEAVE A PERMANENT INDENTATION ON DASHBOARD SURFACES MADE OF SOFT VINYL, LEATHER, OR SIMILAR MATERIALS. TO PREVENT PERMANENT INDENTATION MARKS, USE THE INCLUDED ADHESIVE MOUNTING DISK WHEN MOUNTING ON SOFT DASHBOARD SURFACES. WITH CERTAIN DASHBOARD SURFACES YOU MAY NEED TO PUSH DOWN FIRMLY ON THE SUCTION BASE WHILE ENGAGING THE SUCTION LOCK LEVER TO CREATE ENOUGH SUCTION TO HOLD THE MOUNT.

Attach pedestal to windshield or dashboard and engage suction lock lever.

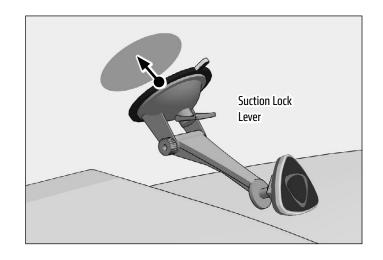

OPTIONAL: For use on soft vinyl	or leather dashboards, use included
adhesive mounting disk*.	

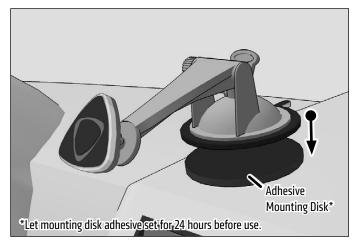



Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and / or air bag deployment.

Arkon is not responsible for any damages caused to your vehicle, your device, or yourself due to the installation or use of this mount.

RESOURCES INC.

NC. The Mobile Mounting Specialists[™]