TAB088G17 | 15" Seat Rail or Floor Tablet Mount with Flexible Gooseneck




Do not place mount in or near an air bag deployment zone or where it will obstruct view of the road.

IMPORTANT: Install the appropriate size support legs on the holder that will work for your device.

Passenger Seat Bolt Mounting


For a simple mount that can be easily moved to another vehicle, install using the passenger seat track bolt.

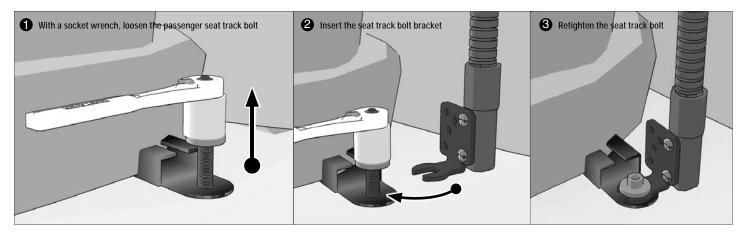


Alternative Floor or Console Mounting

For permanent installation, connect the Floor/Console Mount Bracket to the floor or console. This will require drilling into your vehicle's interior surface.

- Drilling into the dash, floor, or console will permanently damage the vehicle. Use caution and consult a mobile install professional to avoid drilling into the gas tank, electrical system or other highly sensitive vehicle components.
- Fig. A Screw the mount bracket to the mount. Depending on your vehicle, you may need to change the orientation of the bracket.
- Fig. B Attach the Floor / Console Bracket with screws.



Attach holder and mount device

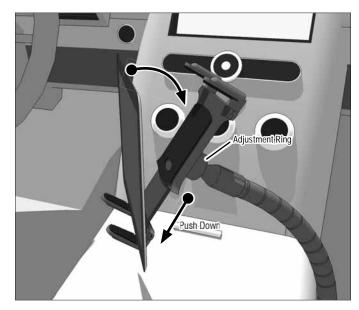





Safety Precautions Arkon is not responsible for any damages caused to your vehicle, your device, or yourself due to the installation or use of this pedestal mount.

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and / or air bag deployment.