




**Installation Instructions v1.0:
6.7 Cummins Boost Fooler
2007.5-2013 6.7 Cummins**

Please read all instructions before installation.

1. Please verify no visual damage has occurred to the Boost Fooler prior to install.
2. Locate the MAP sensor found on the driver's side intake manifold closest to the firewall.

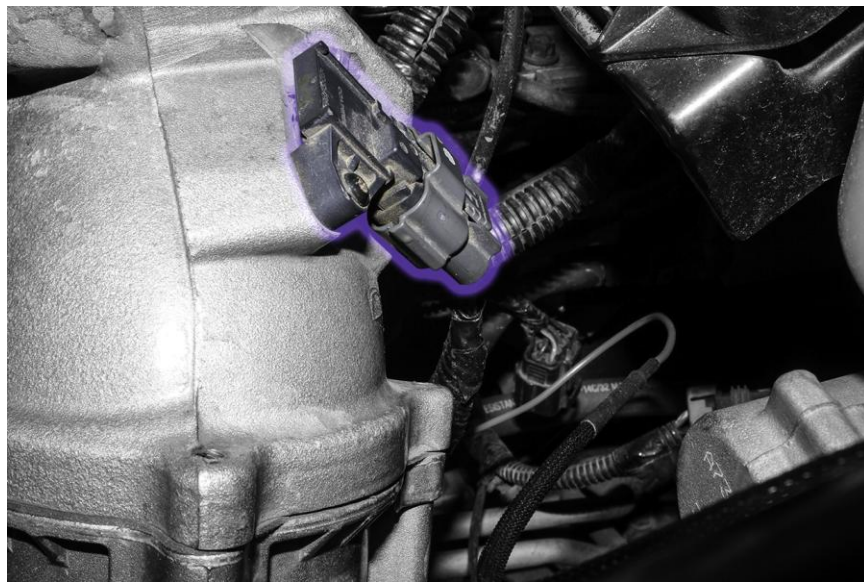

3. Unplug the factory connection and plug the Boost Fooler in line as shown in figure 3.

