

**AC-LGD 60™**  
**OHMS**

**AudioControl®**  
*Making Good Sound Great™*

**LOAD GENERATING DEVICE & SIGNAL STABILIZER  
FOR OEM SOUND SYSTEMS REQUIRING A SPEAKER LOAD**

PROVIDES STABILITY TO PREMIUM AMPLIFIED OEM SOUND SYSTEMS  
IDEAL FOR PREMIUM AMPLIFIED DODGE®, CHRYSLER®, JEEP®, MASERATI®  
MAXIMUM INPUT 25 VRMS (150 WATTS)



**FACTORY UPGRADE ACCESSORY**

# AC-LGD 60™ 60 OHMS

## LOAD GENERATING DEVICE & SIGNAL STABILIZER FOR OEM SOUND SYSTEMS REQUIRING A SPEAKER LOAD

### What is a Load Generating Device?

Today's factory amplifiers feature built in protection circuits which can mute some or all audio outputs when the factory speakers are removed. The AC-LGD 60 has been designed to generate load and stabilize signal from amplified factory systems to ensure the best possible audio.

### Quick Start:



1. Remove one speaker level input plug from your AudioControl active line output converter (LOC), processor, or amplifier
2. Unplug one end of AC-LGD 60 then plug the AC-LGD 60 into the LOC
3. Install the plug you removed from the LOC to the open end of the AC-LGD 60
4. Connect your factory speaker signals to the AC-LGD 60
5. If you are using a LOC with different style connectors, unscrew the connectors from the AC-LGD 60 wires and connect the wires accordingly

### Important

- ➔ Do not exceed **25 Vrms** (150 watts) of input
- ➔ Operating Impedance: 60 Ohms
- ➔ Do not install under carpet or near heat sources

### What's Included?

One pair of AC-LGD 60s prewired with EIA color coded wires

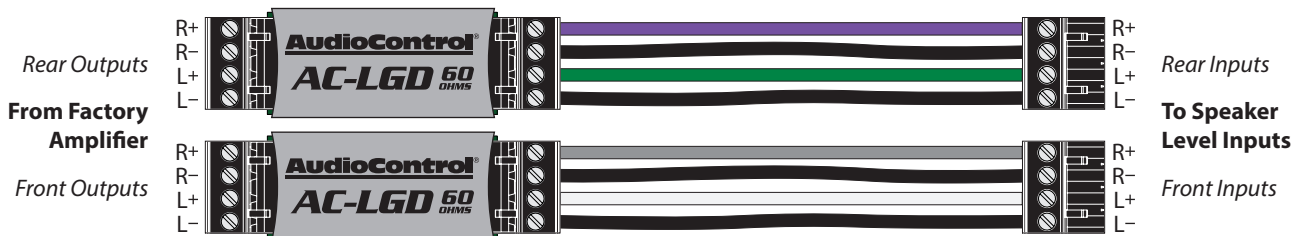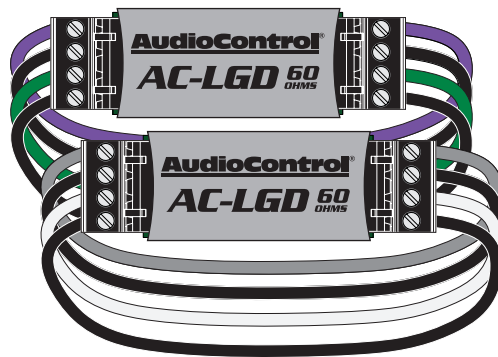

**AudioControl**  
Making Good Sound Great™

22410 70th Ave West | Mountlake Terrace, WA 98043 USA  
Phone 425-775-8461 | Fax 425-778-3166  
www.audiocontrol.com

Also  
makes a  
charming  
bracelet!



©2019 AudioControl. All rights reserved. P/N 9120640