

Oil/Water Pressure Programming Quick Reference Guide

Pressure Calibration (Hold for 5 seconds)



Normal Mode



Dial Brightness (press one at a time)



Peak Mode



Factory Default Reset (Hold for 5 seconds)



High Alert Setting Mode



Use LEFT or RIGHT buttons to select high alert warning signal.



Low Alert Setting Mode



Use LEFT or RIGHT buttons to select high alert warning signal.



Color Select Mode



Use LEFT or RIGHT buttons to select illumination color.



Choose from one of seven colors. Red, Blue, Green, Purple, Yellow, Orange, White.

Use LEFT or RIGHT buttons to adjust pointer brightness



Pointer Brightness Mode (Hold for 5 seconds)






Dial Brightness Mode



Use LEFT or RIGHT buttons to select Dial Brightness.





Return to Normal Mode









Dual Input Fuel Pressure Programming Quick Reference Guide

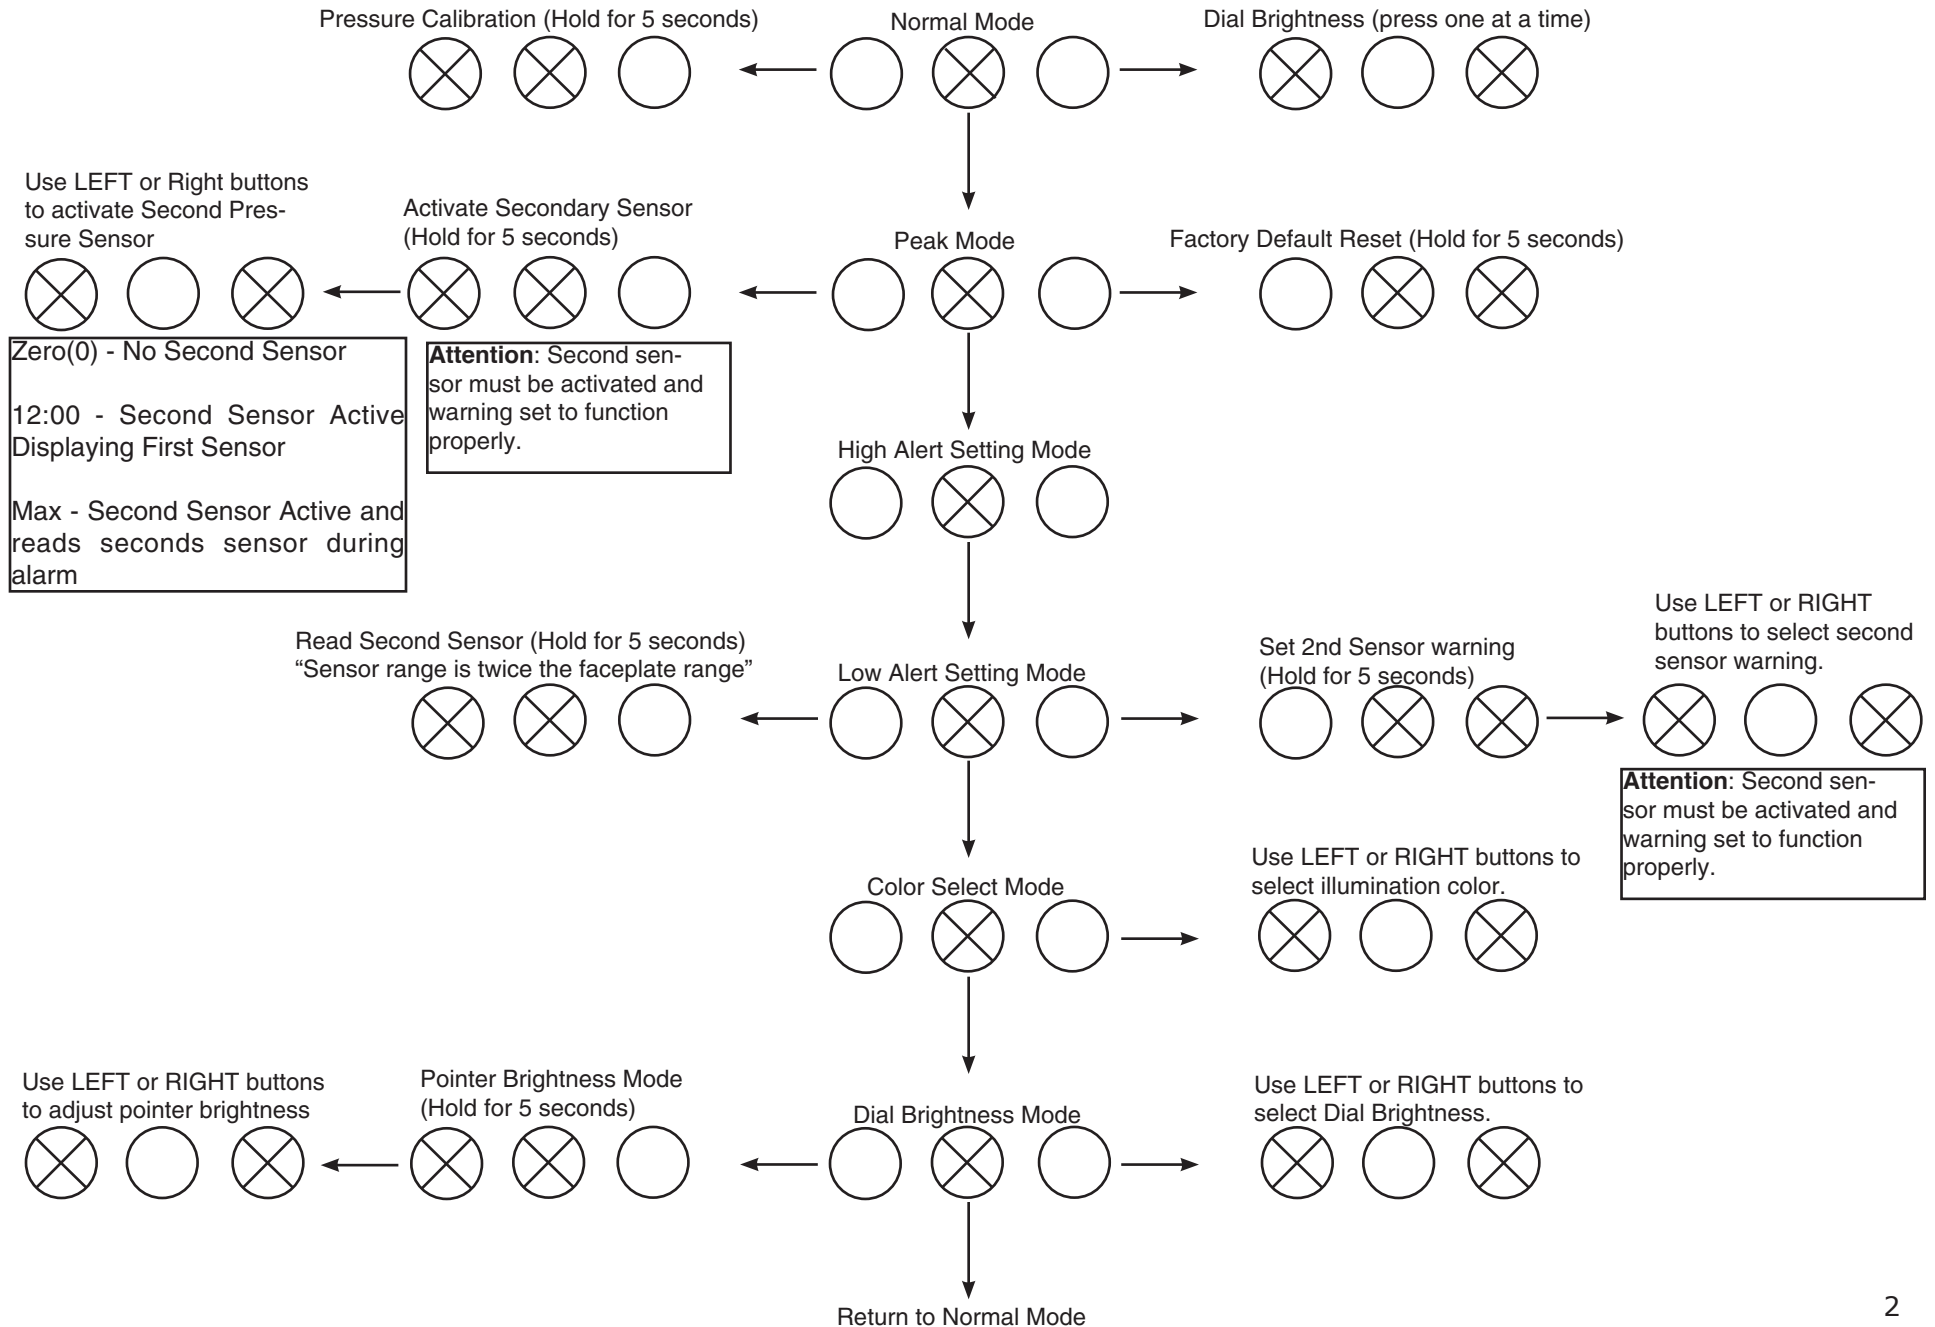
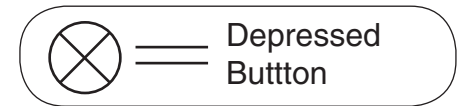







Temperature Programming Quick Reference Guide



Choose from one of seven colors. Red, Blue, Green, Purple, Yellow, Orange, White.

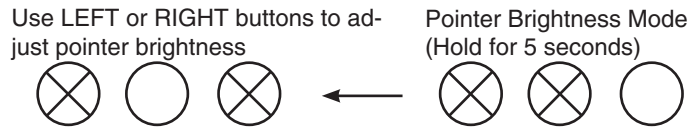


Return to Normal Mode





Tachometer Programming Quick Reference Guide

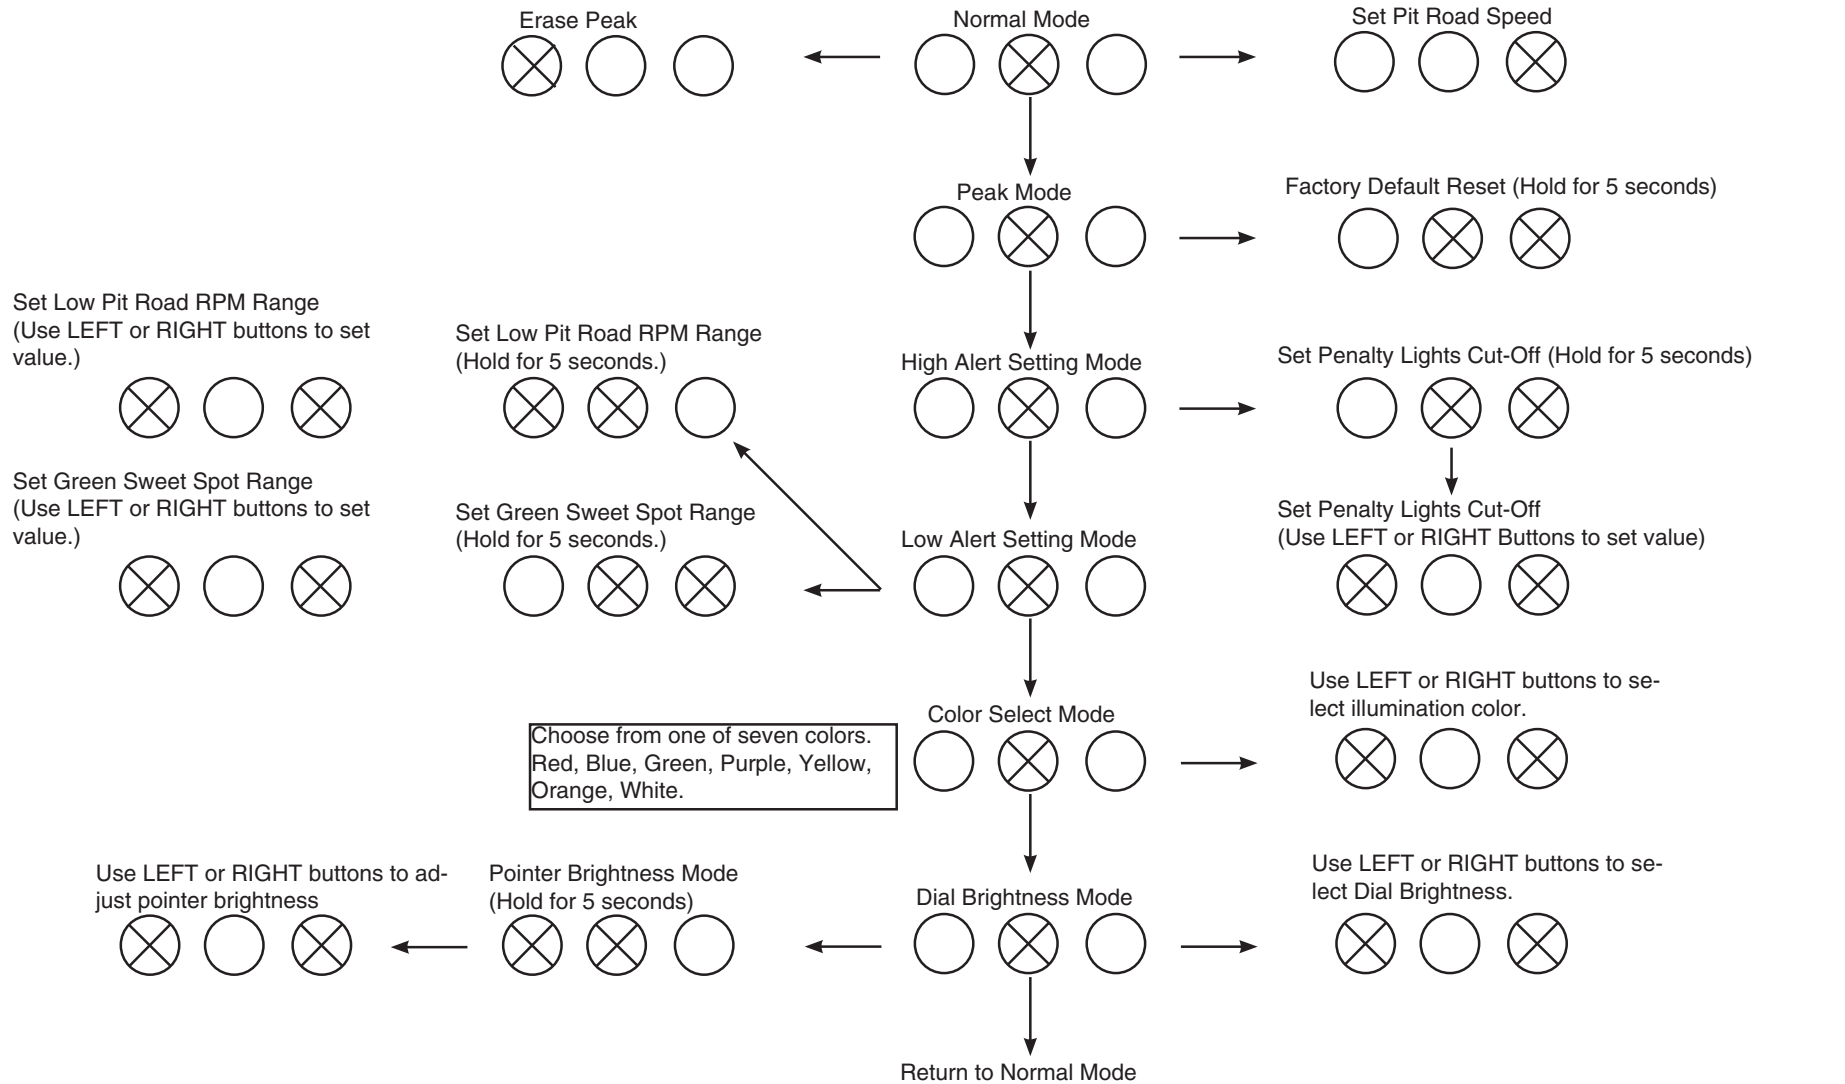

Choose from one of seven colors.
Red, Blue, Green, Purple, Yellow,
Orange, White.

○ ⊗ ○ = Save changes and advance to next menu

⊗ = Depressed Button

RED BLUE YELLOW
○ ○ ○

⊗ ○ ⊗ = When pressed together exit menu without changes