







# Installation Instructions Adapter Bracket for TrailMax™ Front Seats


## Vehicle Application

- Jeep Wrangler  
1997 and newer  
Part Number: 51256

INSTALLATION TIME	SKILL LEVEL
 <b>1/2 Hour</b>	<b>1</b> <b>2</b> <b>3</b> <b>4</b> <b>1 - Easy</b>
TOOLS	
 Wrench <b>13mm</b>	 Safety Glasses



 **CAUTION** Safety glasses should be worn at all times while installing this product.



 **WARNING** This product is designed primarily to enhance the appearance of the vehicle and to shield the occupants from ordinary weather conditions. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. This product will not protect the occupants from falling objects. Never operate the vehicle in excess of manufacturer's specifications.

### WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.

# Adapter Bracket for TrailMax™ Front Seats – Installation Instructions

## Parts List

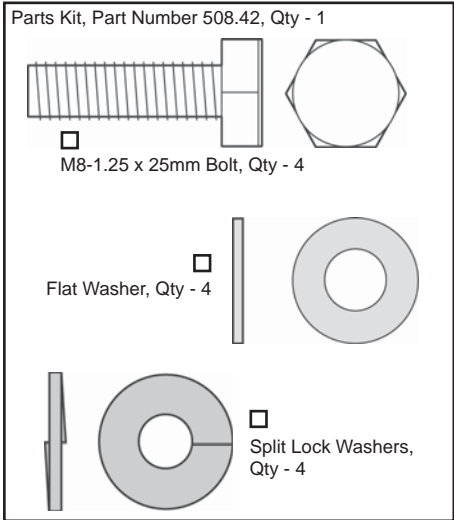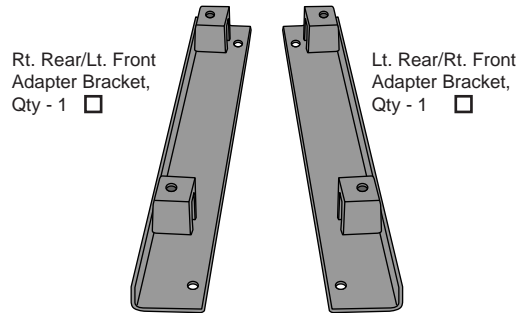


**CAUTION** Before beginning the seat installation, set the parking brake, place the vehicle in gear or park and chock the wheels to reduce the risk of the vehicle unexpectedly moving, which could result in serious injury.

**WARNING** The product is designed to be installed on the original seat riser. DO NOT remove or loosen any of the original seat riser anchor bolts. Doing so may cause improper anchoring of the seat, which could result in serious injury, to you and others.


## 1 Remove the existing seat from the vehicle.

Reach up under the seat and remove the four (4) nuts that mount the seat to the riser. It may be easier to reach the rear nuts if you slide the seat forward. Do not throw away the four (4) nuts since they will be reused.

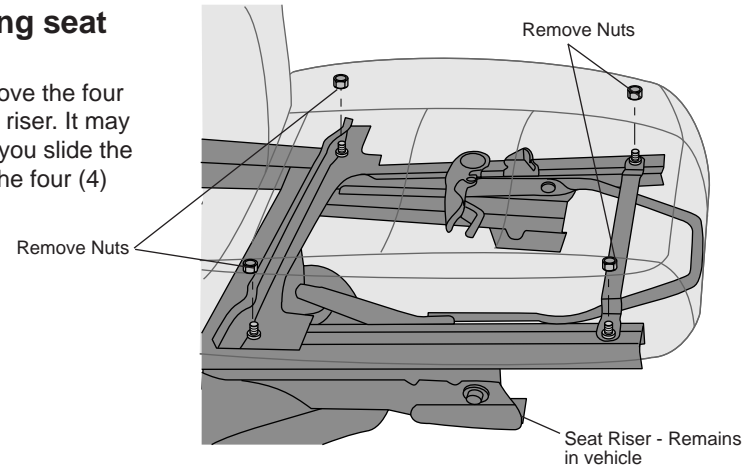

## 2 Disconnect the Cable Release


Lift the seat up slightly to allow access to the cable. Lift up on the plastic tab to pull the cable off the mounting bracket, rotate the cable up 90° and pull the end of the cable out of the hole. Remove the seat from the vehicle.

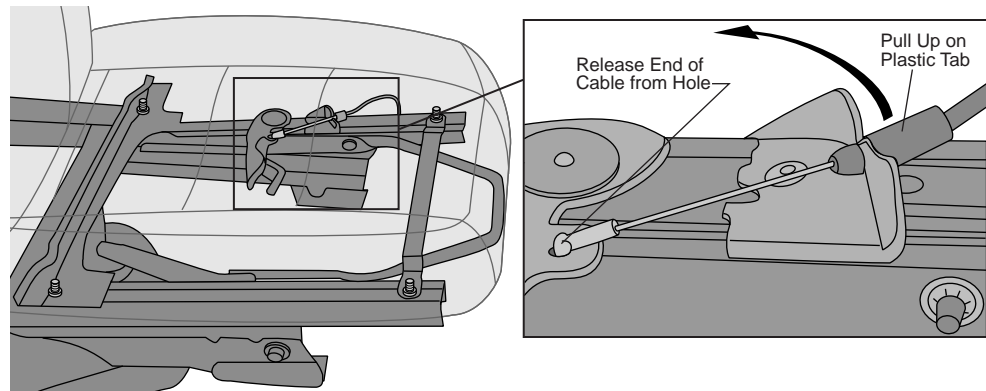

# Adapter Bracket for TrailMax™ Front Seats – Installation Instructions

## Hole Pattern

Your new Bestop seat has two (2) mounting holes on each side of the front and three (3) holes on each side of the rear. This allows tracks from various Jeep models to be used with the Bestop seat.

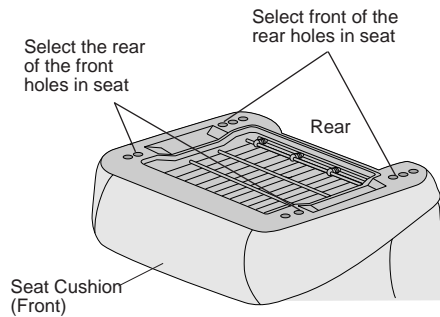


## 3 Install the Adapter Brackets on the Replacement Seat.

Orient the brackets so that the raised pads are toward the outside of the seat and the lips are toward the front and rear edges.

Place the rear bracket on the seat bottom so that the holes in the bracket line up with the front of the three holes in the bottom of the seat. Install two (2) of the M8-1.25x25 Bolts that came with the seat in the bracket.


Place the front bracket on the seat bottom so that the holes in the bracket line up with the rear of the two holes in the bottom of the seat. Install two (2) of the M8-1.25x25 Bolts that came with the seat in the bracket.

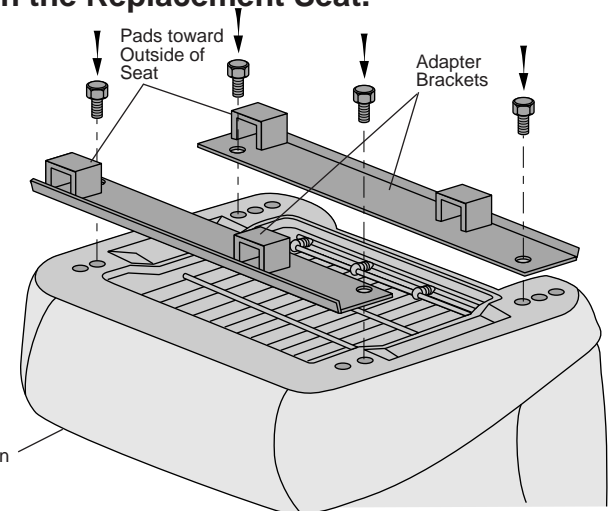

## 4 Install the Seat in the Vehicle.

Place the seat in the vehicle. Align the studs on the tracks with the holes in the seat riser. Reinstall the four (4) nuts that were removed in Step One on the track studs. Tighten the nuts.

**NOTE** Note: In order to tumble the seat forward to access the rear of the vehicle, reach under the seat and manually push down on the Seat Release Lever.

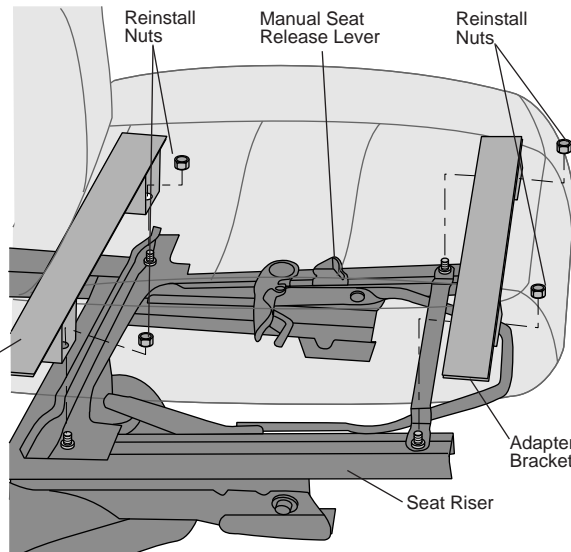

**WARNING** Never adjust the driver's seat or seat back when the vehicle is moving.

You could lose control of the vehicle and injure someone.

This seat system is intended to be used with seat belts at all times. Do not rely on the seat to maintain the seating position of occupants, in the event of an accident.

Always drive and ride with your seat back upright and the lap belt snug across the hips to reduce the risk of serious injury to the abdomen or neck that could be caused by sliding under the seat belts in a collision. Children should always ride with the seat back in the fully upright position. When the seat back is not fully upright, there is a greater risk that the child will slide under the safety belt and be seriously injured in a collision.

**WEAR SEAT BELTS AT ALL TIMES**