



INSTALLATION INSTRUCTIONS

MAX T BULL BAR FOR 2020 CHEVY SILVERADO 2500

PART # MBT-MG303







Before Installation


- Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- The figures here are for reference only and may have differences with the actual product you received, however they share the same assembly way.

Care and Cleaning

- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

Parts list

NO.	QTY	NAME	NO.	QTY	NAME
①	1	 Bull Bar	②	2	 License Plate Bracket 1
③	1	 License Plate Bracket 2	④	1	 Frame Bracket (L)
⑤	1	 Frame Bracket (R)	⑥	1	 Mounting Bracket (L)


⑦	1		
		Mounting Bracket (R)	

STANDARD PARTS LIST:

⑧	8	Hex Bolt M10_30	⑨	16	Nylon Lock Nut M10
⑩	4	Assembly Bolt	⑪	1	Allen Wrench S=4
⑫	4	Flat Washer D6(6x12x1.6mm)	⑬	24	Flat Washer D10_27_3
⑭	4	Hex Nut M6	⑮	2	Hex Button Head Bolt M6_20
⑯	4	Double bolt plate (M10*35)			

Installation Steps

Installation Figure:

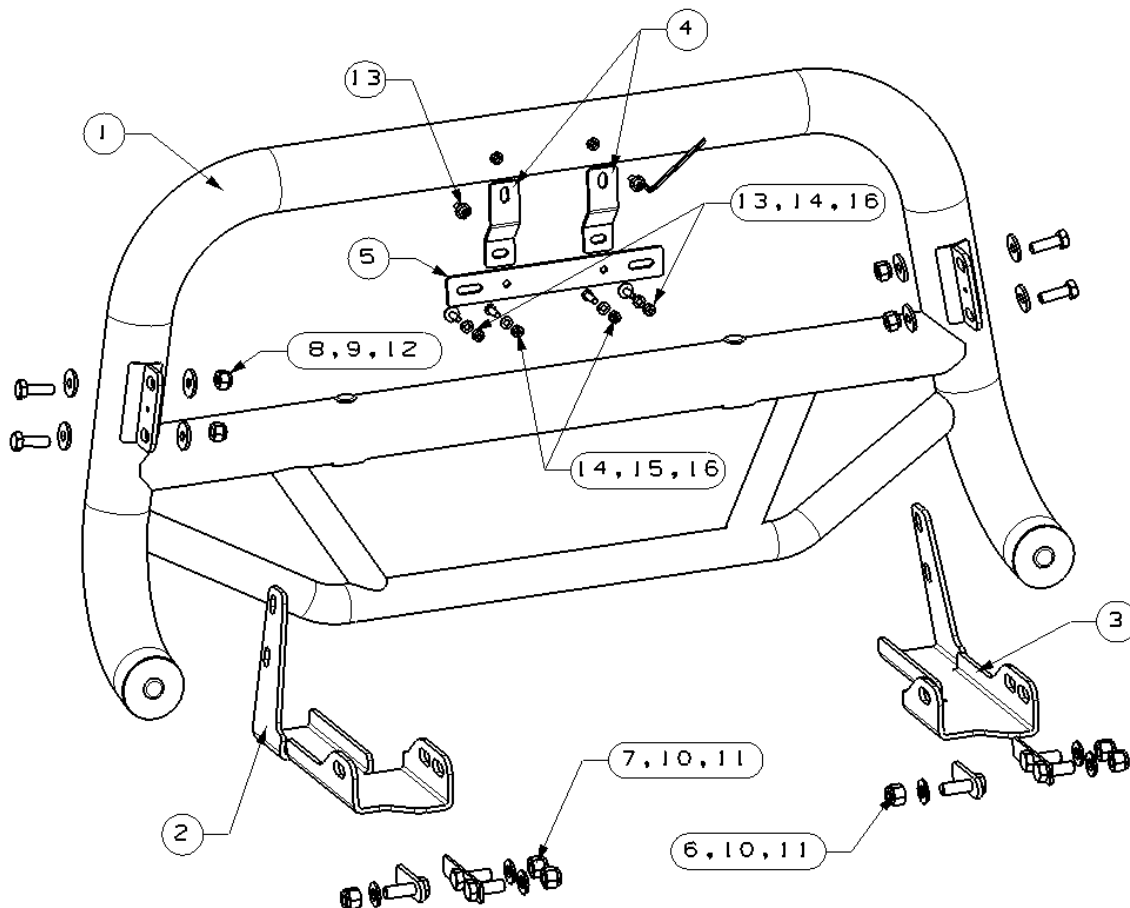

STEP 1:

Start installation from under the front of the vehicle. Determine if the vehicle is equipped with tow hooks.


IMPORTANT: Tow hooks cannot be reinstalled with the Guard.

Tow Hook equipped vehicles:


For diesel models with tow hooks, jump to Step 2.

- a. Remove the factory tow hook from the end of each frame, (Figs1 & 2).
- b. Select the Driver/Left Frame Bracket. Insert the Bracket through the opening in the bumper and up to the frame. Trim the plastic as required to clear the Bracket. Repeat to check for clearance on Passenger/Right side of bumper.
- c. Proceed to STEP 2.

Driver/Left Side Installation Pictured

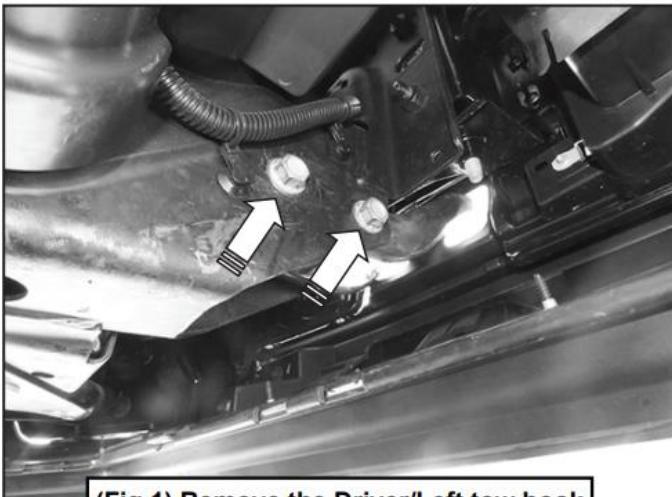

(Fig 1) Remove the Driver/Left tow hook

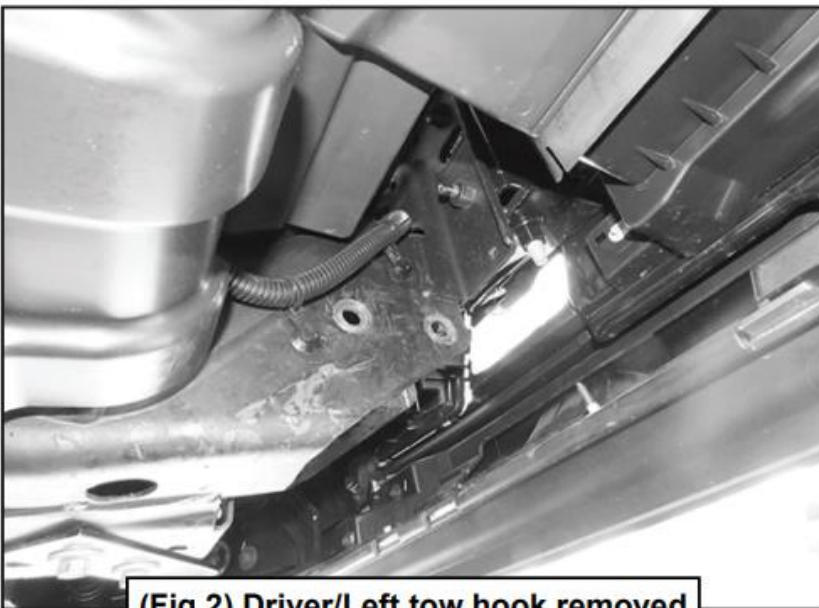

(Fig 2) Driver/Left tow hook removed

Vehicles without tow hooks:

- a. Cut out the indented area in both sides of the plastic bumperinsert to clear the Brackets.




IMPORTANT: Make several small cuts for best fit.

- b. Check for clearance between Brackets and opening and trim the plastic as required to clear the Brackets.

STEP 2:

Line up the holes in the Bracket with the holes in the end of the frame. Select (2) 10mm Double Bolt Plates. Insert the Bolt Plates into the end of the frame and out through the (4) holes in the sides of the frame and out through the Bracket. Attach the Bracket to the Bolt Plates with (4) 10mm Flat Washers and (4) 10mm Nylon Lock Nuts, (Figs 3–5). Leave hardware loose at this time.

Driver/Left Side Installation Pictured

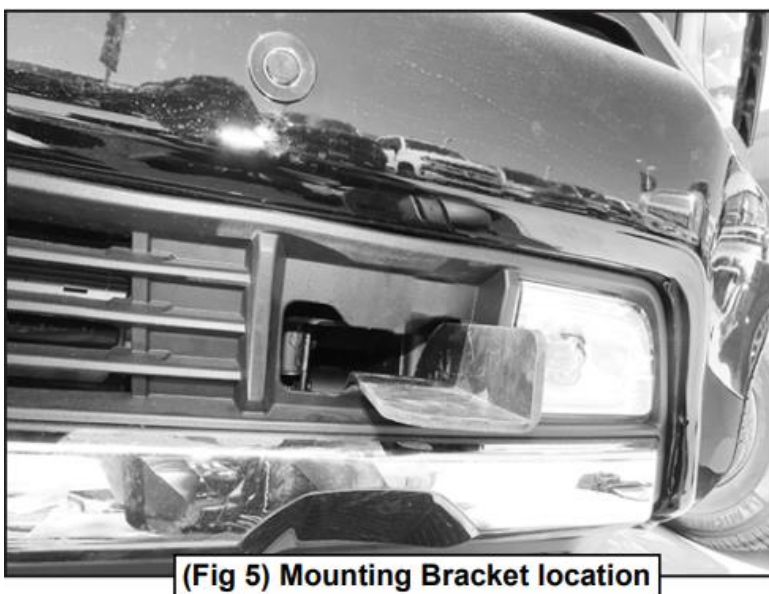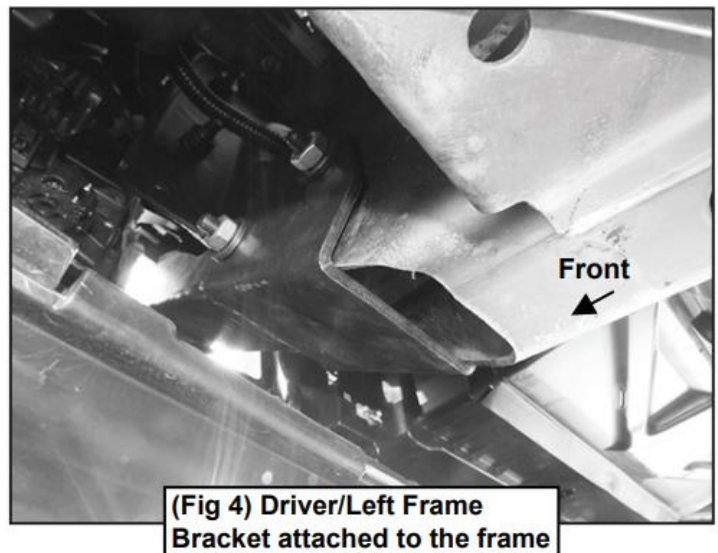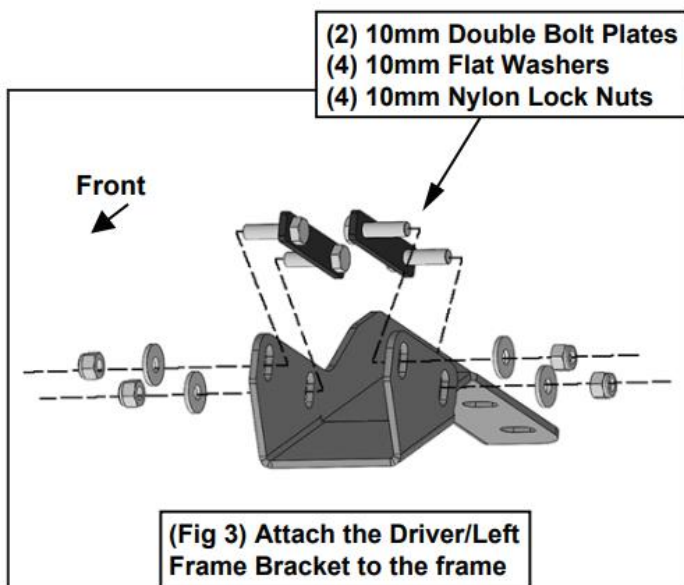


STEP 3:

Select the Driver/Left Mounting Bracket. Attach the Mounting Bracket to the Driver/Left Frame Bracket with (2) 10mm Hex Bolts, (4) 10mm Flat Washers and (2) 10mm Nylon Lock Nuts, (Figs 6 & 7). DO NOT tighten hardware at this time.

Driver/Left Side Installation Pictured

(2) 10mm Hex Bolt
(4) 10mm Flat Washers
(2) 10mm Nylon Lock Nuts

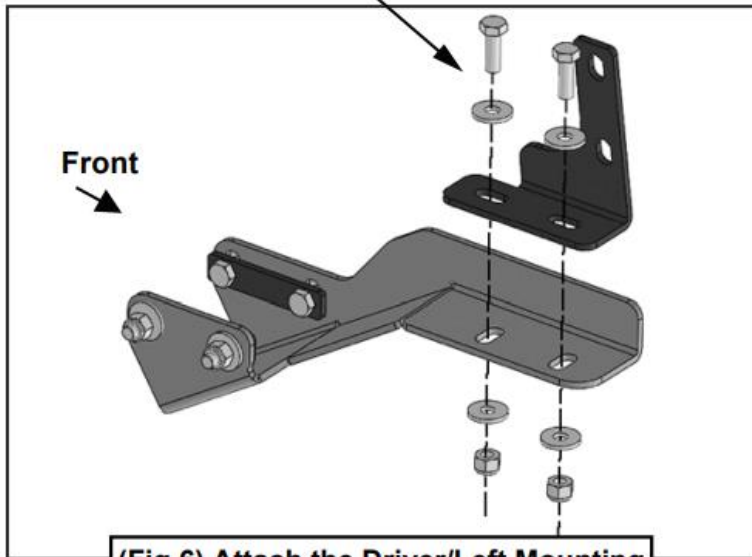

(Fig 6) Attach the Driver/Left Mounting Bracket to the Frame Bracket




(Fig 7) Driver/Left Mounting Bracket attached to the Frame Bracket

STEP 4:

Repeat STEPS 2 & 3 to attach the Passenger/Right Frame and Mounting Brackets.

STEP 5:


With assistance, hold the Bull bar up to position on the inside of the Mounting Brackets. Attach the Bull bar to the Brackets with (4) 10mm Hex Bolts, (8) 10mm Flat Washers and (4) 10mm Nylon Lock Nuts, (Figs 8 & 9). DO NOT tighten hardware at this time.

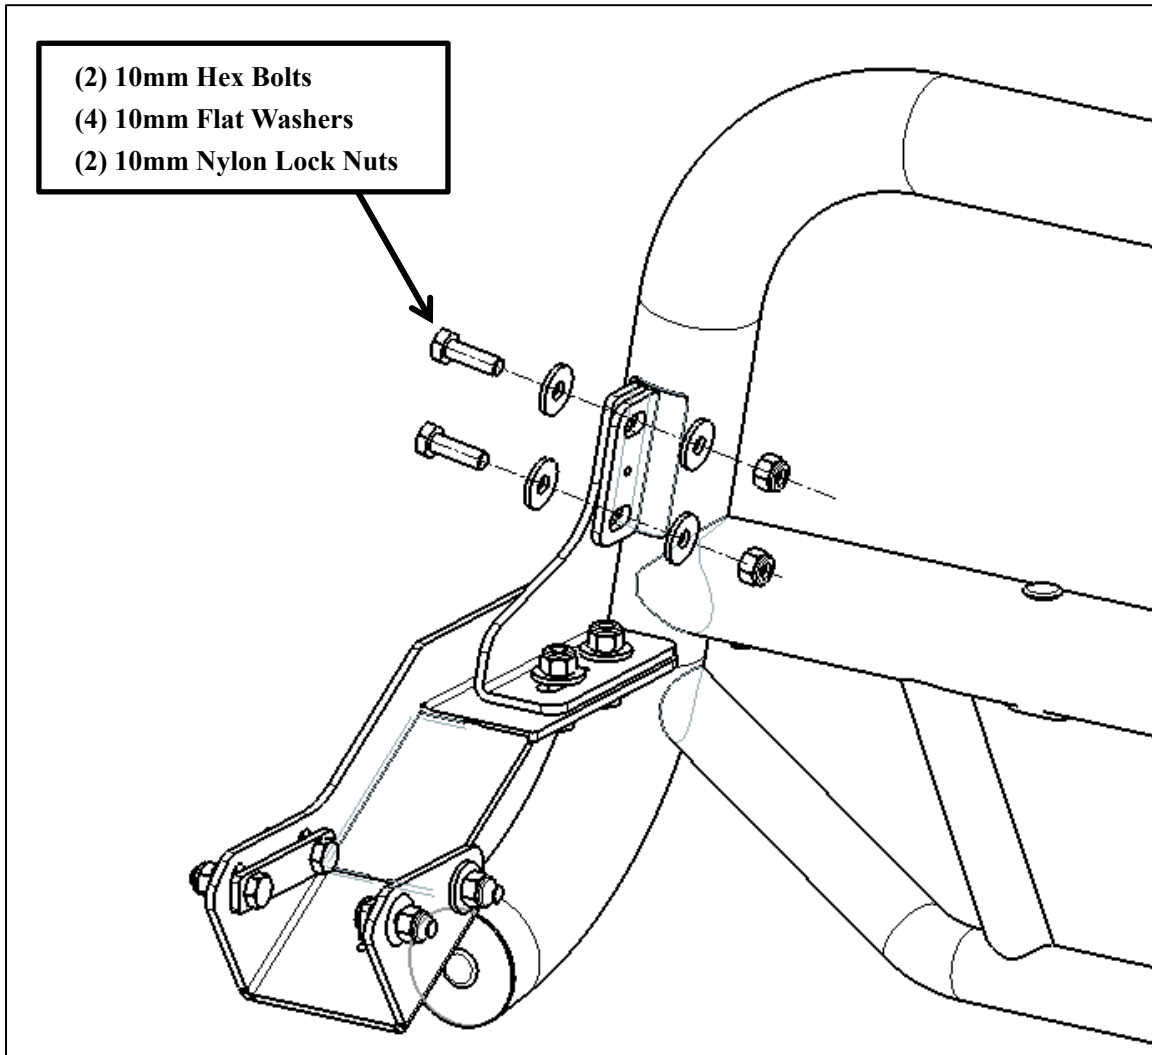

STEP 6:


Install License Plate Bracket.

- A. Connect License Plate Bracket 1 on bull bar with (2) Assembly Bolts M6_20.
- B. Connect License Plate Bracket 1 and License Plate Bracket 2 with (2) Hex Button Head Bolts M6_20, (2) Flat Washers D6, (2) Hex Nuts M6.
- C. Install license plate to License Plate Bracket 2 with (2) Assembly Bolts M6_20, (2) Flat Washers D6, (2) Hex nuts M6.

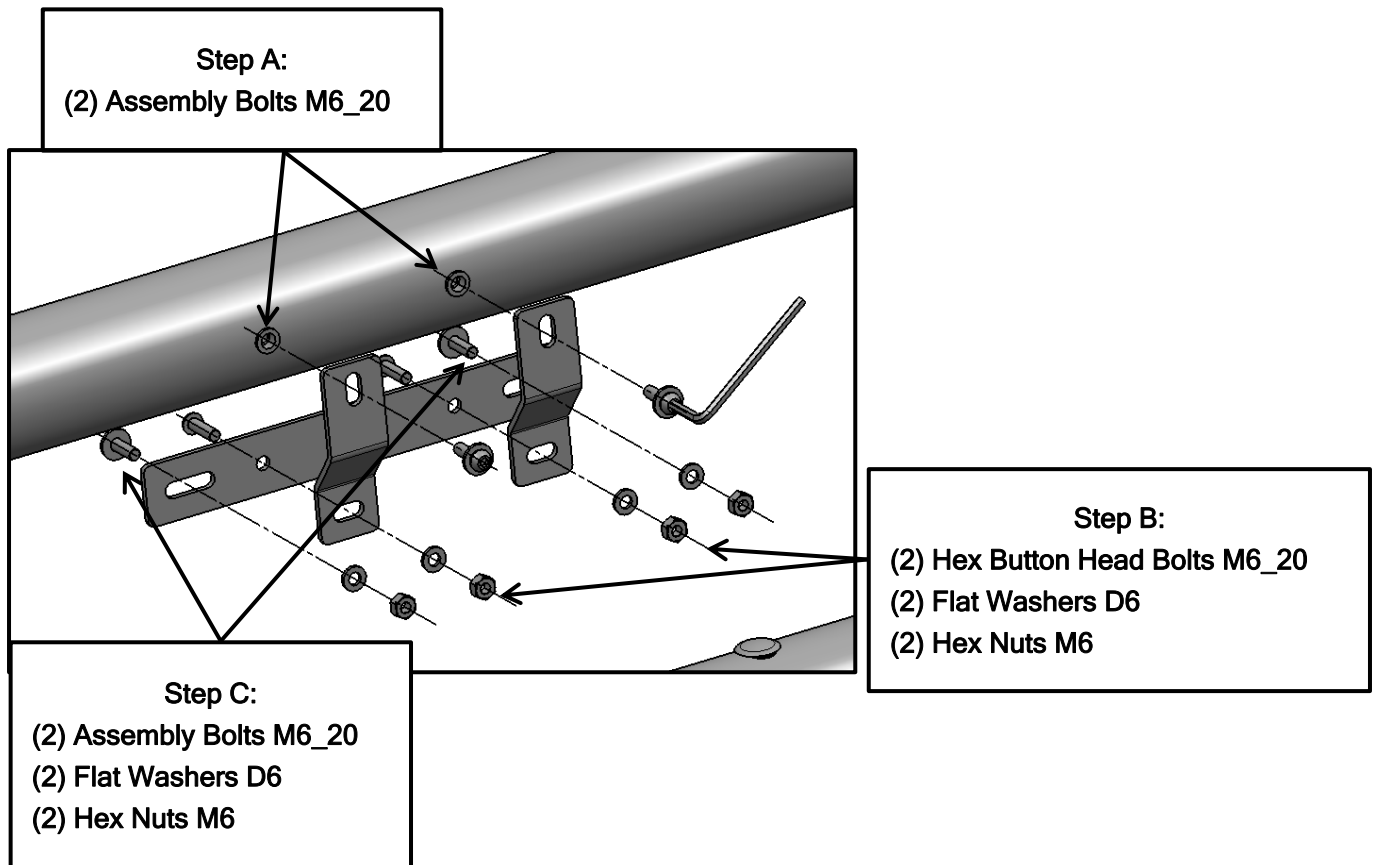

STEP 7:

Check the Bull bar alignment with the vehicle and for clearance between the Bull bar and the bumper. Adjust as necessary then fully tighten all hardware at this time.

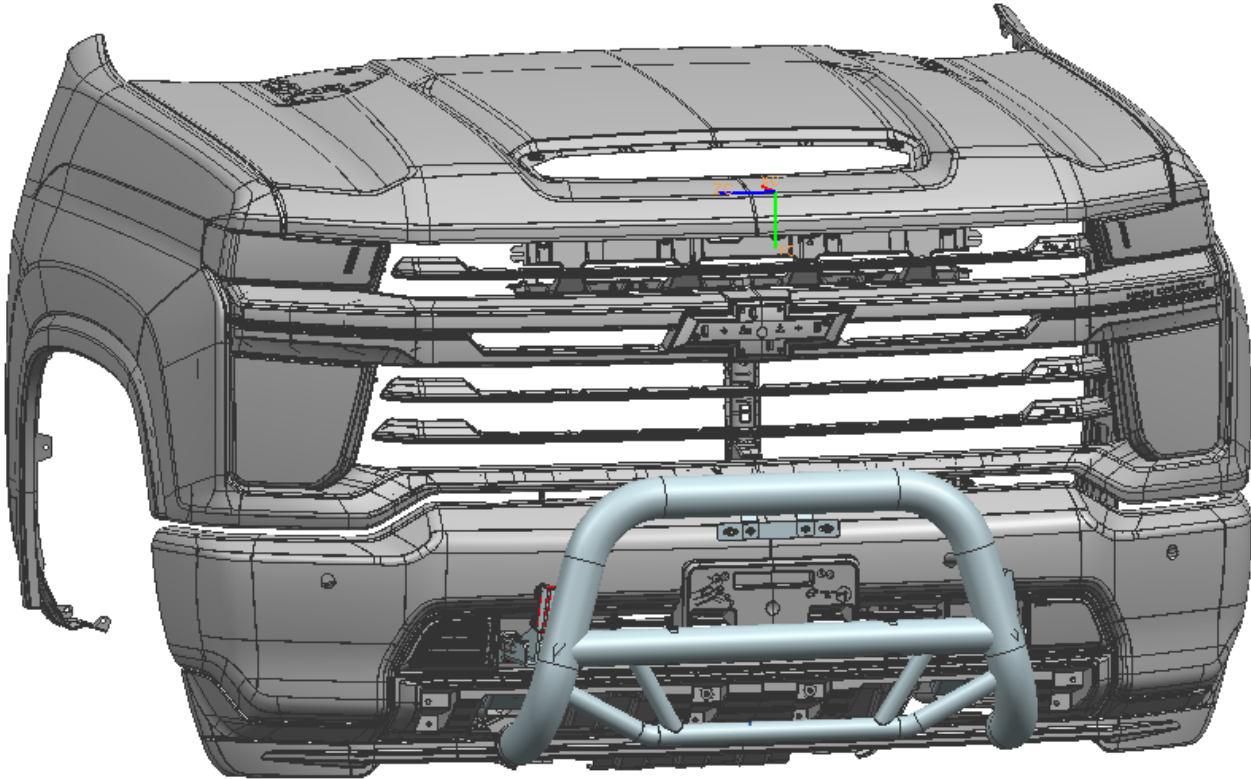

Installation Complete

NOTE

Any damages and losses caused by improper installation and application, goes beyond our quality warranty.