

Installation Instructions

8891040 Series LED LIGHTBAR




Specifications

24 High-power LEDs
2 Amps @ 12V
24W
11" x 6-1/2" 2-1/4"

Wiring Designation

Red: +VDC
Black: Ground
Yellow: Signal

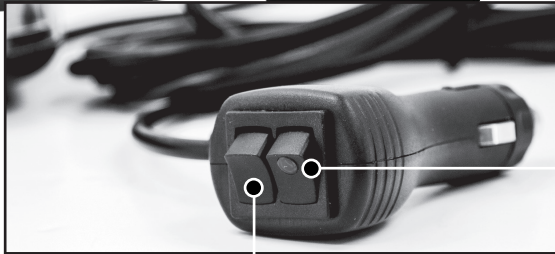

Flash Pattern
Selector

Power On/Off

Flash Pattern	Description
1	Rotating (CW/CCW)
2	Burst, Fade In-Out/Solid, Fade In-Out
3	Random
4	Burst, Alternating (Side to Side)
5	Burst, Alternating, Diagonal (Front to Back)
6	Burst, Dual Rotating (CW)
7	Burst Hold/Burst Side to Side
8	Burst Hold/Single Hold
9	Burst, Single Rotating (CW)
10	Burst, Single Rotating (CCW)

Note: Press pattern button 0.5 seconds for next pattern

WARNING

Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage

WARNING

It is not recommended to use magnetically mounted warning devices on vehicles in motion. Usage is at sole risk and responsibility of the user.

READYING THE LIGHTBAR FOR PROPER MOUNTING

Magnetic Mount Ready



Bolt-On/Permanent Mount Ready



1. Unscrew magnetic feet by turning counter clockwise.
2. Insert rubber a plug into each magnetic foot mounting hole.
3. Remove (4) screws on center mounting plate. The plate can now be removed.
4. Insert 10mm bolt, head first, into the bottom of the lightbar.
5. Reattach center mounting plate and screws.
6. The lightbar is now ready to be permanently mounted.
7. Place neoprene gasket between the lightbar and mounting surface.
8. Use the included washer, split washer, and nut to finish attaching the lightbar to the mounting surface.