

LED Mini Lightbar Magnetic Mount



WIRING DESIGNATION

Red: +VDC
Blue: Ground
Green: Signal

FLASH PATTERNS

Momentarily apply +VDC to green wire or change pattern switch:



- 0.5 seconds for next pattern
- 2.5 seconds for reset to FP#1

FP#	FLASH PATTERNS
1	Double (Rear-Side-Front-Full)
2	Double (Right-left Split)
3	Triple (Full)
4	1)-2)-3) Combine
5	Rotate (Single)
6	Rotate (7 Groups Triple)
7	H/L (Right-left Split)-Quint (Full)
8	Triple H/L (Full- Right-Left)
9	Quint (Full)
10	3)-2)-5) Combine

NOTE: 1. This unit is factory set at FP#1

WARNING: Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage.

Magnet Mount (Standard)

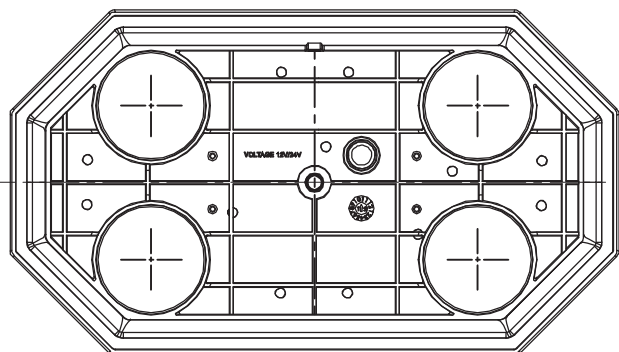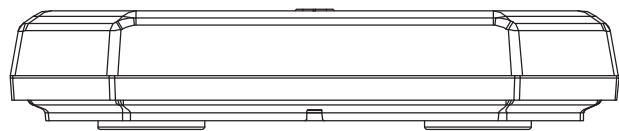

WARNING: It is not recommended to use magnetically mounted warning devices on vehicles in motion. Usage is at the sole risk and responsibility of the user.