


Installation Instructions

SL66AO, SL66AG, SL66AC, SL66CA, SL66CG, SL66GO and SL41AR LED Recessed Strobe Lights


All strobe lights can be connected so the flash pattern is synchronized (simultaneous flash) or alternate flash side-to-side.

1. Connect all lights to a standard 3-pin power harness with the wires connected as shown for desired flash pattern.
2. Connect the GREEN and YELLOW wires as shown below for desired synchronized pattern.


A. Synchronized Strobes (Simultaneous Flash)

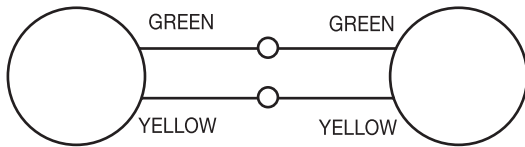


B. 2 Alternating Strobes (Side-to-Side)

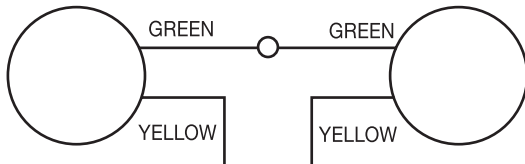

C. 4 Synchronized Strobes (Simultaneous Flash)

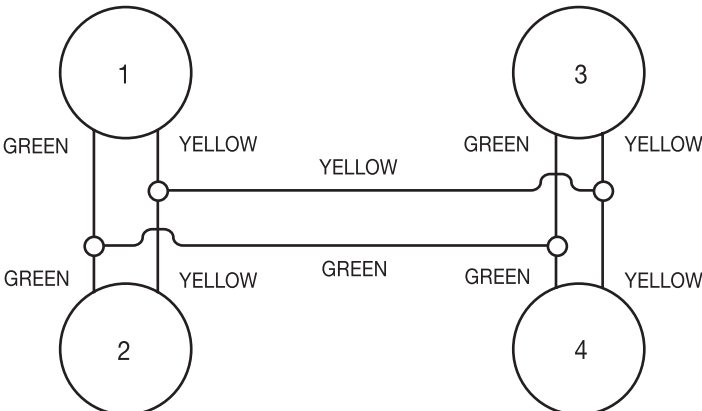

D. 4 Alternating Strobes (Side-to-Side)

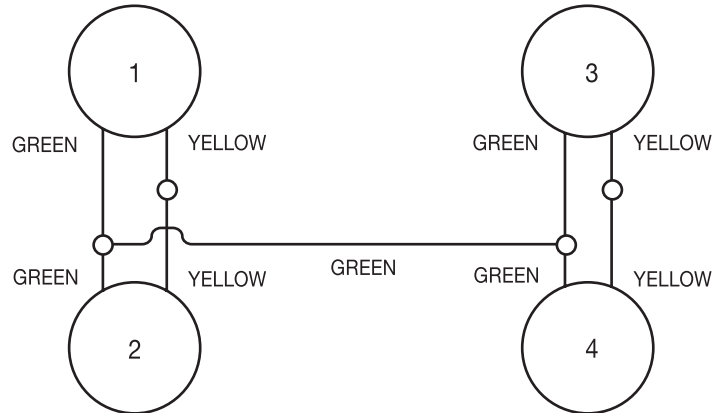

Lead Wire Color	12-24 Volts to Power Source	Flash Pattern
White	Ground (-)	N/A
Black	Positive (+)	Dual
Red	Positive (+)	Quad
Red & Black	Positive (+)	Sixfold