

EURO MOUNTS LOADED MOUNTS CHANNEL MOUNTS HEAVY-DUTY MOUNTS ATV MOUNTS EXTENDERS & ADAPTERS



BALL MOUNTS

Each towing setup is a little different than the next, just like no two adventures are exactly the same. At CURT, we know there are countless lifestyles in the towing industry, and that is why we offer a wide variety of ball mount options.

From our light-duty class 1 mounts to our hardworking channel mounts, the CURT ball mount line has the weight capacity, shank size and versatility to meet your customers' needs. We offer standard ball mounts ranging from 2,000 up to 20,000 lbs., as well as a number of specialized mounts to get the job done.

The majority of CURT ball mounts are made right here in the USA. We use CNC-forming and robotic welding to provide a precise fit, and we protect each of our USA-made ball mounts with a durable powder coat finish for long-lasting reliability.

Wherever your customers find adventure, give them the exact fit they need to Bring It® with CURT.

Planograms available.



Bring It[®]

ADVANTAGES OF THE EURO MOUNT®

If your customer is looking for a simple, maintenance-free 1 1/4" ball mount option, the Euro Mount® is the perfect choice. With the Euro Mount®, there are fewer installation requirements, and it is easy to choose the right fit. Take a look below to find the Euro Mount® that works best for your customer's towing needs.



No tools and no torque specifications required



No need to purchase a separate trailer ball



Easy installation: simply insert the pin & clip



Sleek, modern look, similar to popular European designs

Each Euro Mount® was designed to replace a common, old-style ball mount, making trailer ball installation unnecessary

The comparisons below illustrate which Euro Mount® replaces a common, old-style ball mount



45561 Euro Mount® and 45520 old-style



45591 Euro Mount® and 45522 old-style



45571 Euro Mount® and 45521 old-style




45581 Euro Mount® and 45521 old-style



45551 Euro Mount® and 45518 old-style

Measuring a Euro Mount®

Required Ball Height = A - B

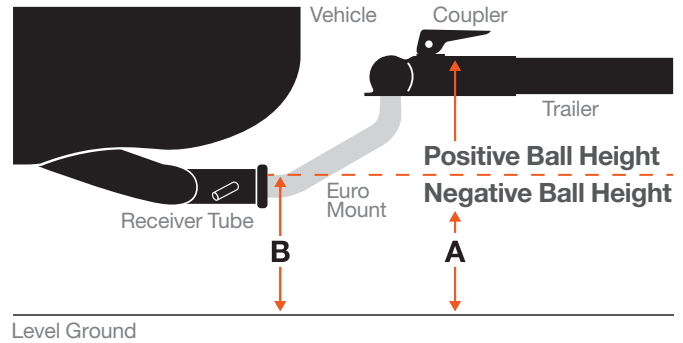

1 1/4 INCH EURO MOUNT® BALL MOUNTS

- Fits any 1 1/4" x 1 1/4" receiver tube opening
- Installs easily with no tools or torque specifications required
- Permanently attached trailer ball cannot be loosened or stolen
- Protected by a highly durable carbide powder coat finish
- Patent#s D610,051 S; D610,492 S; D610,493 S; D610,494 S; D610,954 S

Part#	GTW / TW	Ball Diameter	Ball Height	Length
45551	3,500 / 350 lbs.	1 7/8"	2 3/4"	10"
45571	3,500 / 350 lbs.	1 7/8"	4 5/8"	7 1/4"
45561	3,500 / 350 lbs.	1 7/8"	5 1/8"	9 3/4"
45591	3,500 / 350 lbs.	1 7/8"	5 1/8"	11 1/4"
45581	3,500 / 350 lbs.	1 7/8"	- 3/4"	8 3/4"
45552	3,500 / 350 lbs.	2"	2 3/4"	10"
45572	3,500 / 350 lbs.	2"	4 5/8"	7 1/4"
45562	3,500 / 350 lbs.	2"	5 1/8"	9 3/4"
45592	3,500 / 350 lbs.	2"	5 1/8"	11 1/4"
45582	3,500 / 350 lbs.	2"	- 3/4"	8 3/4"



1 1/4
INCH

CLASS 1 BALL MOUNTS

- Fits any 1 1/4" x 1 1/4" receiver tube opening
- Multiple drop and rise options to accommodate various vehicle-trailer combinations
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable powder coat finish



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Shank Type	Finish
45018	2,000 / 200 lbs.	1 1/4"	5/8"	6 3/4"	3/4"	Hollow	Gloss black
45019	2,000 / 200 lbs.	1 1/4"	5/8"	9 3/4"	3/4"	Hollow	Gloss black
45027	2,000 / 200 lbs.	3 1/4"	2 5/8"	6 1/4"	3/4"	Hollow	Gloss black
45022	2,000 / 200 lbs.	3 1/4"	2 5/8"	7 1/4"	3/4"	Hollow	Gloss black
45026	2,000 / 200 lbs.	3 1/4"	2 5/8"	9 3/8"	3/4"	Hollow	Gloss black
45028	2,000 / 200 lbs.	6"	4 5/8"	5 9/16"	3/4"	Solid	Gloss black
45021	2,000 / 200 lbs.	--	3"	9 1/2"	3/4"	Solid	Gloss black
45023	2,000 / 200 lbs.	--	3 3/4"	11 1/2"	3/4"	Solid	Gloss black
45024	2,000 / 200 lbs.	--	5"	9 9/16"	3/4"	Solid	Gloss black
45025	2,000 / 200 lbs.	--	5"	11 9/16"	3/4"	Solid	Gloss black

1 1/4 INCH CLASS 2 BALL MOUNTS

- Fits any 1 1/4" x 1 1/4" receiver tube opening
- Multiple drop and rise options to accommodate various vehicle-trailer combinations
- Protected by a durable powder coat finish



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Shank Type	Finish
45503	3,500 / 350 lbs.	1"	3/8"	7 13/16"	3/4"	Solid	Gloss black
45518	3,500 / 350 lbs.	1 1/4"	3/4"	6 3/4"	3/4"	Solid	Gloss black
45519	3,500 / 350 lbs.	1 1/4"	3/4"	9 3/4"	3/4"	Solid	Gloss black
45017	3,500 / 350 lbs.	3 1/4"	2 5/8"	6 1/4"	3/4"	Solid	Gloss black
45521	3,500 / 350 lbs.	3 1/4"	2 5/8"	7 1/4"	3/4"	Solid	Gloss black
45016	3,500 / 350 lbs.	3 1/4"	2 5/8"	9 3/8"	3/4"	Solid	Gloss black
45520	3,500 / 350 lbs.	--	3 1/8"	9 3/4"	3/4"	Solid	Gloss black
45510	3,500 / 350 lbs.	--	3 1/8"	10 5/16"	3/4"	Solid	Gloss black
45522	3,500 / 350 lbs.	--	3 1/8"	11 1/4"	3/4"	Solid	Gloss black
45000	3,500 / 350 lbs.	--	3 7/8"	13 1/2"	3/4"	Solid	Gloss black
45014	3,500 / 350 lbs.	--	5"	9 5/8"	3/4"	Solid	Gloss black
45015	3,500 / 350 lbs.	--	5"	11 5/8"	3/4"	Solid	Gloss black

1 1/4
INCH

&

2
INCH

TOWING STARTER KITS

- Includes all the accessories needed to complement a trailer hitch in one kit
- Reusable case is able to be shelved or hung on pegs (#45534, #45554)



45534



45554



45148



45147



45141



45142

Part#	Shank Size	GTW / TW	Ball Diameter	Drop	Rise	Length	Included Parts
45141	2"	7,500 / 750 lbs.	2"	2"	--	7 1/2"	45134 Fusion ball mount, 23021 hitch lock
45142	2"	7,500 / 750 lbs.	2"	4"	--	8 1/8"	45154 Fusion ball mount, 23021 hitch lock
45148	1 1/4"	3,500 / 350 lbs.	2"	3 1/4"	2 5/8"	7 1/4"	45521 ball mount, 40003 trailer ball, 21403 pin & clip
45147 NEW	1 1/4"	3,500 / 350 lbs.	2"	1 1/4"	3/4"	9 3/4"	45519 ball mount, 40003 trailer ball, 21403 pin & clip
45534*	2"	7,500 / 750 lbs.	2"	2"	3/4"	8 1/4"	45030 ball mount, 40037 trailer ball, 23515 hitch lock, 22272 hitch tube cover, 21500 pin & clip, case
45554*	2"	7,500 / 750 lbs.	2"	4"	2"	8 1/4"	45050 ball mount, 40037 trailer ball, 23515 hitch lock, 22272 hitch tube cover, 21500 pin & clip, case

* Sturdy, reusable case included



2 CLASS 3 BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Multiple drop and rise options to accommodate various vehicle-trailer combinations
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable chrome-plated or powder coat finish
- White box kits include a pin & clip
- Informative, full-color retail packaging also available



Black Bulk#	Chrome Bulk#	Retail Pkg#	White Box Kit#	With Pin & Clip Poly Bag#	GTW / TW	Drop	Rise	Length	Hole Size
45030	45290	45031	45032	45033	7,500 / 750 lbs.	2"	3/4"	8 1/4"	1"
45010	--	45011	45012	--	7,500 / 750 lbs.	2"	3/4"	8 1/4"	1"
45040	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	10 1/4"	1"
45020	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	10 1/4"	1"
45260	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	12 1/4"	1"
45250	--	--	--	--	7,500 / 750 lbs.	2"	3/4"	12 1/4"	1"
45050	45296	45051	45052	--	7,500 / 750 lbs.	4"	2"	8 1/4"	1"
45060	--	--	--	--	7,500 / 750 lbs.	4"	2"	10 1/4"	1"
45270	--	--	--	--	7,500 / 750 lbs.	4"	2"	13"	1"

2 CLASS 3 DEEP DROP BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Increased drop allows for level towing with lifted vehicles
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable chrome-plated or powder coat finish



Black Bulk#	Chrome Bulk#	GTW / TW	Drop	Rise	Length	Hole Size
45070	45297	7,500 / 750 lbs. drop	6"	4"	9 1/4"	1"
		6,000 / 600 lbs. rise				
45080	--	7,500 / 750 lbs. drop	6"	4"	12 1/4"	1"
		6,000 / 600 lbs. rise				
45280	--	7,500 / 750 lbs. drop	6"	4"	14 1/4"	1"
		6,000 / 600 lbs. rise				
45090	--	5,000 / 500 lbs. drop	8"	6"	11 1/2"	1"
		3,500 / 350 lbs. rise				
45100	--	5,000 / 500 lbs. drop	8"	6"	13"	1"
		3,500 / 350 lbs. rise				
45110	--	5,000 / 500 lbs. drop	10"	8"	13"	1"
		3,500 / 350 lbs. rise				
45112	--	5,000 / 500 lbs. drop	10"	8"	14"	1"
		3,500 / 350 lbs. rise				



2 LOADED BALL MOUNTS

INCH

- Fits any 2" x 2" receiver tube opening
- Includes a factory-torqued trailer ball and pin & clip
- Three-mount multi-packs include an informative point-of-purchase tray
- Protected by a durable chrome-plated or powder coat finish



Part#	White Box Kit#	Multi-Pack#	GTW / TW	Ball Diameter	Drop	Length	Finish
45034	--	45035	3,500 / 350 lbs.	1 7/8" (40002)	2"	8 1/4"	Gloss black
--	45293	--	3,500 / 350 lbs.	1 7/8" (40002)	2"	8 1/4"	Chrome
45036	--	45037	7,500 / 750 lbs.	2" (40037)	2"	8 1/4"	Gloss black
--	45295	--	7,500 / 750 lbs.	2" (40037)	2"	8 1/4"	Chrome
45041	--	45041003	7,500 / 750 lbs.	2 5/16" (40005)	2"	8 1/4"	Gloss black
45331	--	--	15,000 / 1,500 lbs.	2 5/16" (40030)	2"	8 1/2"	Carbide
45055	--	--	3,500 / 350 lbs.	1 7/8" (40002)	4"	8 1/4"	Gloss black
45056	--	45057	7,500 / 750 lbs.	2" (40037)	4"	8 1/4"	Gloss black
45042	--	45042003	7,500 / 750 lbs.	2 5/16" (40005)	4"	8 1/4"	Gloss black
45332	--	--	15,000 / 1,500 lbs.	2 5/16" (40030)	4"	8 1/2"	Carbide

2 RIGHT-ANGLE BALL MOUNTS

INCH

- Fits any 2" x 2" receiver tube opening
- Angled shank allows for easier insertion into the receiver tube
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable powder coat finish



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45047	7,500 / 750 lbs.	2"	3/4"	10 1/4"	1"	Gloss black
45067	7,500 / 750 lbs.	4"	2"	10 1/4"	1"	Gloss black
45087	7,500 / 750 lbs. drop	6"	4"	12 1/4"	1"	Gloss black
	6,000 / 600 lbs. rise					



2 INCH FUSION BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Includes a welded trailer ball and pin & clip
- Permanently attached trailer ball cannot be loosened or stolen
- Two-mount multi-packs include an informative point-of-purchase tray
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable powder coat finish



Part#	Multi-Pack#	GTW / TW	Ball Diameter	Drop	Rise	Length	Finish
45131	45136	5,000 / 500 lbs.	1 7/8"	2"	--	7 1/2"	Gloss black
45134	45139	7,500 / 750 lbs.	2"	2"	--	7 1/2"	Gloss black
45151	45156	5,000 / 500 lbs.	1 7/8"	4"	--	8 1/8"	Gloss black
45154	45158	7,500 / 750 lbs.	2"	4"	--	8 1/8"	Gloss black
45152	45157	5,000 / 500 lbs.	1 7/8"	--	2"	8 1/8"	Gloss black
45155	45159	7,500 / 750 lbs.	2"	--	2"	8 1/8"	Gloss black

2 INCH DUAL-LENGTH BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Two hitch pin holes for varying length
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable powder coat finish



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45220	7,500 / 750 lbs.	2"	3/4"	7 1/2" or 10 1/2"	1"	Gloss black
45230	7,500 / 750 lbs.	4"	2"	8 1/8" or 11 1/8"	1"	Gloss black
45240	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	6"	4"	9 1/4" or 12 1/4"	1"	Gloss black

Two pin holes for varying length

2 CLASS 4 BALL MOUNTS

INCH

- Fits any 2" x 2" receiver tube opening
- Increased drop allows for level towing with lifted vehicles
- Hollow shanks can be used with an anti-rattle kit
- Protected by a durable powder coat finish



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Shank Type
45310 NEW	10,000 / 1,000 lbs.	2"	1"	9 3/8"	1 1/4"	Hollow
45311 NEW	10,000 / 1,000 lbs.	4"	2 3/4"	9 3/8"	1 1/4"	Hollow
45336	10,000 / 1,000 lbs.	6"	4 3/4"	9 3/8"	1 1/4"	Hollow
45338	10,000 / 1,000 lbs.	8"	6 3/4"	9 3/8"	1 1/4"	Hollow
45312 NEW	12,000 / 1,200 lbs.	2"	1"	9 3/8"	1 1/4"	Solid
45313 NEW	12,000 / 1,200 lbs.	4"	3"	9 3/8"	1 1/4"	Solid
45446	12,000 / 1,200 lbs.	6"	5"	9 3/8"	1 1/4"	Solid
45448	12,000 / 1,200 lbs.	8"	7"	9 3/8"	1 1/4"	Solid

2 FORGED BALL MOUNTS

INCH

- Fits any 2" x 2" receiver tube opening
- Ideal for CURT class 5 Xtra Duty trailer hitches (page 33)
- Constructed from solid, forged steel for superior strength
- Protected by a highly durable carbide powder coat finish



Part#	Case-Pack#	GTW / TW	Drop	Rise	Length	Hole Size
45340	45340002*	17,000 / 2,550 lbs.	2"	1"	8 1/2"	1 1/4"
45341	45341002*	17,000 / 2,550 lbs.	4"	3"	8 1/2"	1 1/4"
45342	45342002*	17,000 / 2,550 lbs.	6"	5"	9 1/2"	1 1/4"

* Case-packs are two ball mounts in non-display brown boxes



2 INCH MULTI-BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Allows for quick switching between trailer ball sizes
- Permanently attached trailer balls cannot be loosened or stolen
- Hollow shanks can be used with an anti-rattle kit



Part#	Trailer Balls	Ball Diameter and Maximum GTW / TW			Length	Shank Type	Ball Finish	Shank Finish
		1 7/8"	2"	2 5/16"				
45660	2	--	7,500 / 750 lbs.	10,000 / 1,000 lbs.	8 1/2"	Solid	Black	Gloss black
45665	2	--	7,500 / 750 lbs.	10,000 / 1,000 lbs.	8 1/2"	Solid	Chrome	Gloss black
45002	2	--	7,500 / 750 lbs.	10,000 / 1,000 lbs.	8 1/2"	Hollow	Chrome	Gloss black
45675*	3	3,500 / 350 lbs.	5,000 / 500 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Solid	Chrome	Gloss black
45650	3	5,000 / 500 lbs.	7,500 / 750 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Solid	Black	Gloss black
45655	3	5,000 / 500 lbs.	7,500 / 750 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Solid	Chrome	Gloss black
45001	3	5,000 / 500 lbs.	7,500 / 750 lbs.	10,000 / 1,000 lbs.	7" and 8 1/2"	Hollow	Chrome	Gloss black

* Tow hook limited to trailer hitch capacity

2 INCH REVERSIBLE BALL MOUNTS

- Fits any 2" x 2" receiver tube opening
- Allows for quick switching between trailer ball sizes and drop or rise
- Permanently attached trailer balls cannot be loosened or stolen
- Hollow shanks can be used with an anti-rattle kit




Part#	Ball Diameter and Maximum GTW / TW			Drop	Rise	Length	Shank Type	Finish
	1 7/8"	2"	2 5/16"					
45643	6,000 / 600 lbs.	7,500 / 750 lbs.	--	4" (1 7/8" ball)	2" (2" ball)	10 1/2"	Hollow	Gloss black
45644	--	7,500 / 750 lbs.	7,500 / 750 lbs.	4" (2" ball)	2" (2 5/16" ball)	10 1/2"	Hollow	Gloss black

2 & **2 1/2**
INCH INCH **ADJUSTABLE CHANNEL MOUNTS**

⚠ Weight capacities limited to the lowest rated towing component


- Adjustable channel mount allows for precise trailer leveling
- Built-in anti-rattle helps promote quiet towing
- Protected by a highly durable carbide powder coat finish
- Ball mount and dual-ball mounts include pins & clips
- Pintle mounts include safety pin #25012
- Informative, full-color retail packaging
- Patent# 8,033,563 (#45900, #45901, #45902)
- **Five-year limited warranty (#45900, #45901, #45902)**



Built-in anti-rattle prevents shaking



Built-in anti-rattle prevents shaking (45900)



Locks secure mount (sold separately) (45900)



45901



45900



45902



45919



45920



45922

Pkg#	Shank Size	Ball Mount GTW / TW	2" Ball GTW / TW	2 5/16" Ball GTW / TW	Max Drop	Max Rise	Length	Hole Size
45901	2"	6,000 / 600 lbs.	--	--	6 3/4"	5 1/4"	11" and 12"	1"
45900	2"	--	10,000 / 1,000 lbs.	14,000 / 1,400 lbs.	6"	5 1/4"	11" and 12"	--
45902	2 1/2"	--	10,000 / 1,000 lbs.	20,000 / 2,000 lbs.	6"	5 1/4"	11" and 12"	--
45919*	--	--	10,000 lbs.	--	--	--	--	1 1/4"
45920*	--	--	--	13,000 lbs.	--	--	--	1 1/4"
45922*	--	--	--	20,000 lbs.	--	--	--	1 1/4"

* Pins not included (see page 175 for pin options)

2 & **2 1/2**
INCH INCH **ADJUSTABLE CHANNEL MOUNT REPLACEMENT SHANKS**

- Adjustable channel mount allows for precise trailer leveling
- Shank can be flipped to maximize rise or drop
- Built-in anti-rattle helps promote quiet towing
- Channels measure 3" wide (I.D.) with holes spaced 1" on center
- Protected by a highly durable carbide powder coat finish



45911



45910



45917


Part#	GTW / TW	Shank Size	Length	Description
45910	10,000 / 1,000 lbs.	2"	11" and 12"	Replacement shank for #45900
45911	6,000 / 600 lbs.	2"	11" and 12"	Replacement shank for #45901
45917	20,000 / 2,000 lbs.	2 1/2"	11" and 12"	Replacement shank for #45902

ADJUSTABLE CHANNEL MOUNT LOCK SET AND REPLACEMENT PARTS

- #23556 replaces adjustable channel-mount pins for increased security
- #45916 replaces the anti-rattle kit for the adjustable channel mount #45900 or #45901
- #45915 replaces the pins for the adjustable channel mount #45900 or #45901




Pins & clips secure the mount into place



Locks secure the mount from theft

Pkg#	Description	Fits	Pin Diameter	Length
23556	Lock set	2" receiver tubes and channel mounts	5/8"	--
45915	Replacement pins	2" channel mounts	5/8"	4 1/4"
45925	Replacement pins	2" and 2 1/2" channel mounts	5/8"	4 1/2"
45916*	Anti-rattle replacement kit	All adjustable channel-mounts	--	--

* Continued while supplies last



Built-in anti-rattle prevents shaking

2 INCH ADJUSTABLE BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Adjusts in 1/2" increments for precise trailer leveling
- Hollow shank can be used with an anti-rattle kit
- Includes pin & clip (45799)



45812 drop



45812 range

Part#	GTW / TW	Max Drop	Max Rise	Length	Hole Size	Finish
45812	5,000 / 500 lbs.	7 1/2"	6 1/4"	12 1/2"	1"	Gloss black

2 INCH ADJUSTABLE TRI-BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Adjustable height allows for precise trailer leveling
- Includes three 5/8" diameter pins & clips



45799



45800



45059



45802

Bulk#	Pkg#	Description	GTW	Ball Diameter	Max Drop	Max Rise	Length
--	45799	Complete tri-ball assembly	6,000 / 7,500 / 10,000 lbs.	1 7/8", 2", 2 5/16"	5 3/4"	5 3/4"	16"
45800	--	Replacement head for 45799	6,000 / 7,500 / 10,000 lbs.	1 7/8", 2", 2 5/16"	--	--	--
45059	--	Adjustable shank for 45799 or 45008	10,000 lbs.	--	5 3/4"	5 3/4"	16"
45802	--	Replacement tube mount for 45799	10,000 lbs.	--	--	--	--

2 INCH ADJUSTABLE MULTI-PURPOSE BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Features two welded trailer balls and removable clevis bar for lunette eyes
- Adjustable height allows for precise trailer leveling
- Includes three 5/8" diameter pins & clips (#45049)
- Patent# 8,534,695



45049



45008



45059



Using trailer ball



Using clevis bar

Bulk#	Pkg#	Description	Ball Diameter and Maximum GTW / TW		Max Drop	Max Rise	Length
			2"	2 5/16"			
--	45049	Complete mount and shank assembly	7,500 / 750 lbs.	10,000 / 1,000 lbs.	6 1/2"	6 11/16"	14 3/16"
45008	--	Replacement head for #45049	7,500 / 750 lbs.	10,000 / 1,000 lbs.	--	--	--
45059	--	Adjustable shank for #45008 or #45799	10,000 / 1,000 lbs. - no ball included		--	--	--

2 INCH TOW HOOK MOUNTS

- Fits any 2" x 2" receiver tube opening
- GTW and TW are limited to trailer hitch capacity



45824



45824 with chain



45825



45825 with chain



45500



45500 with chain

Part#	Description	Length	Finish
45824	Use with tow straps, complete with shackle and solid shank	7 1/2"	Gloss black
45825	Use with 83066 vehicle recovery strap or similar	7 1/2"	Gloss black
45500	Use with 83066 vehicle recovery strap or similar	10"	Carbide

2 INCH SWAY TAB BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Provides a mounting tab for a sway control trailer ball (ball sold separately)
- Hollow shank can be used with an anti-rattle kit



45820



45820 with 40093 ball




Sway control 17200 shown attached

Part#	GTW / TW	Drop	Rise	Length	Hole Size
45820	7,500 / 750 lbs.	2"	3/4"	7 1/2"	1"

2 INCH WELDED D-RING BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Welded D-ring accepts tow straps or hooks
- Angled shank allows for easier insertion into the receiver tube
- Hollow shank can be used with an anti-rattle kit
- Patent# 8,226,107



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45004	7,500 / 750 lbs. drop	6"	4"	10"	1"	Gloss black
	6,000 / 600 lbs. rise					



1 1/4 INCH & 2 INCH VERTICAL RECEIVER TUBE BALL MOUNTS

- Converts a vertical receiver tube into a ball mount tongue (#45507, #45003)
- Adapts a 2" vertical receiver into a 2" standard receiver (#45013)



Part#	Shank Size	GTW / TW	Hole Size	Adapts From	Adapts To	Length	Finish
45507	1 1/4"	3,500 / 300 lbs.	3/4"	--	--	--	Gloss black
45003	2"	4,000 / 400 lbs.	1"	--	--	--	Gloss black
45013	2"	5,000 / 500 lbs.	--	Vertical 2"	Standard 2"	4 1/4"	Gloss black

2 INCH CLEVIS PIN BALL MOUNT

- Fits any 2" x 2" receiver tube opening
- Clevis pin accepts a tow hook or strap
- Can also be used as a standard ball mount
- Includes clevis pin (trailer ball sold separately)



2 1/2 INCH → 2 INCH REDUCER SLEEVE

- Reduces a 2 1/2" x 2 1/2" receiver tube opening to fit a 2" x 2" shank
- Protected by a highly durable carbide powder coat finish
- GTW and TW are limited to trailer hitch capacity



Part#	GTW / TW	Length	Hole Size	Finish
45821	6,000 / 600 lbs.	8 3/4"	1"	Gloss black

Part#	Reduces From	Reduces To	Length	Finish
45405	2 1/2"	2"	5 1/2"	Carbide

2 1/2

INCH

COMMERCIAL DUTY FORGED BALL MOUNTS

- Fits any 2 1/2" x 2 1/2" receiver tube opening
- Ideal for CURT Class 5 Commercial Duty trailer hitches (page 33)
- Constructed from solid, forged steel for superior strength
- Protected by a highly durable carbide powder coat finish



Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45456	20,000 / 2,700 lbs.	2"	1/2"	8 1/2"	1 1/4"	Carbide
45458	20,000 / 2,700 lbs.	4"	2 1/2"	8 1/2"	1 1/4"	Carbide

2 1/2

INCH

HEAVY-DUTY BALL MOUNTS

- Fits any 2 1/2" x 2 1/2" receiver tube opening
- Ideal for CURT Class 5 Commercial Duty trailer hitches (page 33)
- Protected by a highly durable carbide powder coat finish




Part#	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45425	15,000 / 1,500 lbs.	3"	1 1/2"	9 1/2"	1 1/4"	Carbide
45426	15,000 / 1,500 lbs.	5"	3 1/2"	10"	1 1/4"	Carbide
45427	15,000 / 1,500 lbs.	8"	6 1/4"	10 1/2"	1 1/4"	Carbide



REDUCER BUSHINGS

- Reduces hole size, allowing use of trailer balls with smaller shank diameters



Bulk#	Pkg#	Reduces From	Reduces To	Finish
21100	21101	1"	3/4"	Yellow zinc-plated
21200	21201	1 1/4"	1"	Yellow zinc-plated
21300	21301	1 3/8"	1 1/4"	Yellow zinc-plated



BALL MOUNT TONGUE SLEEVE

- Allows for single-wrench trailer ball torquing
- For use with CURT and other 'wrench flat' trailer balls
- See our trailer ball hex-end wrench on page 189
- Patent# 8,376,387



Pkg#	Fits	Hole Size	Finish
45007	2 1/2" tongue width	1"	Gloss black

2 INCH SPECIALTY MOUNTS

- Fits any 2" x 2" receiver tube opening
- Top receiver increases ground clearance for a cargo carrier or other hitch-mounted accessories
- Top receiver not for towing use
- Provides two receiver tubes for multiple accessories, such as a cargo carrier and a ball mount (#45792)
- Ideal for carrying a bike rack while towing a trailer (#45810)



45810 provides a ball mount and receiver tube to tow a trailer and an additional accessory



45792 provides two receiver tubes



45794 gives added ground clearance

Part#	Description	GTW / TW	Drop	Rise	Length	Hole Size	Finish
45794	Raised receiver adapter	Not for towing use / 350 lbs.	--	4 1/4"	5 1/4"	--	Gloss black
45792	Dual receiver extender	3,500 / 350 lbs.	--	5 13/16"	8"	--	Gloss black
45810	Multi-use ball mount	7,500 / 750 lbs.	2"	5 13/16"	12 1/4"	1"	Gloss black



2 INCH FRONT MOUNT ACCESSORIES

- Fits any 2" x 2" receiver tube opening
- Designed for use with front mount hitches
- Can also be used with rear mount hitches when not towing a trailer
- See cargo carriers on page 336



Step provides easier access for working under the hood



Skid shield protects front end and hitch from damage

Part#	Description
31006	Spare tire mount
31001	Step pad with anti-skid surface
31002	License plate holder
31007	Skid shield
31010	Winch mount
31005	Winch mount handles
31009	Winch mount with handles



1 1/4 INCH & 2 INCH TRAILER HITCH RECEIVER TUBE EXTENDERS

- Provides added clearance for a trailer or hitch-mounted accessory
- Shank constructed from solid steel for optimum strength
- Protected by a durable powder coat finish



Part#	Extends	Shank Size	GTW / TW
45789	7"	1 1/4"	Not for towing use / 350 lbs.
45791	8"	2"	3,500 / 350 lbs.
45795	14"	2"	3,500 / 350 lbs.
45796	18"	2"	3,500 / 350 lbs.

Measuring extenders and adapters

Length is measured between pin-holes, from center to center



1 1/4 INCH ↔ 2 INCH ← 2 1/2 INCH TRAILER HITCH RECEIVER TUBE ADAPTERS

- Adapts a receiver tube opening to a different size
- 45048 can be cut down from 34" to 24" and has integrated safety chain loops and an electrical bracket
- Protected by a durable powder coat finish



Part#	Adapts From	Adapts To	GTW / TW	Weight Dist. GTW / TW	Length	Finish
45785	1 1/4"	2"	Not for towing use / 350 lbs.	--	6 1/4"	Gloss black
45790	1 1/4"	2"	Not for towing use / 350 lbs.	--	10"	Gloss black
45770	2"	1 1/4"	3,500 / 350 lbs.	--	4"	Gloss black
45775	2"	1 1/4"	3,500 / 350 lbs.	--	9 1/2"	Gloss black
45780	2"	1 1/4"	3,500 / 350 lbs.	--	15"	Gloss black
45013	Vertical 2"	Standard 2"	5,000 / 500 lbs.	--	4 1/4"	Gloss black
45048	2 1/2"	2"	4,500 / 450 lbs.	6,000 / 600 lbs.	34"	Gloss black
			6,000 / 600 lbs.	8,000 / 800 lbs.	24"	

ATV

2

INCH

ATV TOWING STARTER KITS

- Includes 3-in-1 ATV ball mount, bolt-on ATV adapter and pin & clip
- Never exceed the ATV's maximum tow rating
- Informative, full-color retail packaging
- Patent#s 8,915,514 and 8,276,932

Pkg#	Ball Diameter	Rise	Length	Hole Size	Finish
45029	1 7/8"	1/4"	6"	5/8"	Gloss black
45038	2"	1/4"	6"	5/8"	Gloss black



45029

ATV

2

INCH

3-IN-1 ATV BALL MOUNTS

- Fits any 2" x 2" receiver tube opening or CURT ATV adapter #45006 (shown below)
- Features a trailer ball, 5/8" hole and a clevis pin
- Never exceed the ATV's maximum tow rating
- Includes pin & clip
- Informative, full-color retail packaging
- Patent# 8,276,932



Quickly installs on ATV and allows for a variety of common attachments

Pkg#	Ball Diameter	Rise	Length	Hole Size	Finish
45005	1 7/8"	1/4"	6"	5/8"	Gloss black
45009	2"	1/4"	6"	5/8"	Gloss black



45005

ATV

2

INCH

BOLT-ON ATV ADAPTER

- Bolts onto ATV tongue to provide a 2" x 2" receiver tube
- Features a no-swivel design for solid coupling
- Welded D-ring accepts tow straps or hooks
- Informative, full-color retail packaging
- Patent# 8,915,514



Quickly converts a standard ATV platform into a 2" x 2" receiver tube

Pkg#	Description	Finish
45006	Bolt-on ATV ball mount adapter	Gloss black



45006



No-swivel design

BALL MOUNTS SORTED BY GTW

- Euro Mount®, towing starter kits, multi-ball, adjustable mounts, tow hooks, specialty mounts, extenders, adapters and ATV mounts not listed

Part#	Multi-Pack#	Description	GTW / TW	Ball Diameter	Drop	Rise	Length	Finish
1 1/4" Shank								
45018	--	Class 1	2,000 / 200 lbs.	--	1 1/4"	5/8"	6 3/4"	Gloss black
45019	--	Class 1	2,000 / 200 lbs.	--	1 1/4"	5/8"	9 3/4"	Gloss black
45027	--	Class 1	2,000 / 200 lbs.	--	3 1/4"	2 5/8"	6 1/4"	Gloss black
45022	--	Class 1	2,000 / 200 lbs.	--	3 1/4"	2 5/8"	7 1/4"	Gloss black
45026	--	Class 1	2,000 / 200 lbs.	--	3 1/4"	2 5/8"	9 3/8"	Gloss black
45028	--	Class 1	2,000 / 200 lbs.	--	6"	4 5/8"	5 9/16"	Gloss black
45021	--	Class 1	2,000 / 200 lbs.	--	--	3"	9 1/2"	Gloss black
45023	--	Class 1	2,000 / 200 lbs.	--	--	3 3/4"	11 1/2"	Gloss black
45024	--	Class 1	2,000 / 200 lbs.	--	--	5"	9 9/16"	Gloss black
45025	--	Class 1	2,000 / 200 lbs.	--	--	5"	11 9/16"	Gloss black
45503	--	Class 2	3,500 / 350 lbs.	--	1"	3/8"	7 13/16"	Gloss black
45518	--	Class 2	3,500 / 350 lbs.	--	1 1/4"	3/4"	6 3/4"	Gloss black
45519	--	Class 2	3,500 / 350 lbs.	--	1 1/4"	3/4"	9 3/4"	Gloss black
45017	--	Class 2	3,500 / 350 lbs.	--	3 1/4"	2 5/8"	6 1/4"	Gloss black
45521	--	Class 2	3,500 / 350 lbs.	--	3 1/4"	2 5/8"	7 1/4"	Gloss black
45016	--	Class 2	3,500 / 350 lbs.	--	3 1/4"	2 5/8"	9 3/8"	Gloss black
45520	--	Class 2	3,500 / 350 lbs.	--	--	3 1/8"	9 3/4"	Gloss black
45510	--	Class 2	3,500 / 350 lbs.	--	--	3 1/8"	10 5/16"	Gloss black
45522	--	Class 2	3,500 / 350 lbs.	--	--	3 1/8"	11 1/4"	Gloss black
45000	--	Class 2	3,500 / 350 lbs.	--	--	3 7/8"	13 1/2"	Gloss black
45014	--	Class 2	3,500 / 350 lbs.	--	--	5"	9 5/8"	Gloss black
45015	--	Class 2	3,500 / 350 lbs.	--	--	5"	11 5/8"	Gloss black
2" Shank								
45034	45035	Loaded	3,500 / 350 lbs.	1 7/8"	2"	--	8 1/4"	Gloss black
45293	--	Loaded (white box)	3,500 / 350 lbs.	1 7/8"	2"	--	8 1/4"	Chrome-plated
45055	--	Loaded	3,500 / 350 lbs.	1 7/8"	4"	--	8 1/4"	Gloss black
45090	--	Class 3 deep drop	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	--	8"	6"	11 1/2"	Gloss black
45100	--	Class 3 deep drop	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	--	8"	6"	13"	Gloss black
45110	--	Class 3 deep drop	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	--	10"	8"	13"	Gloss black
45112	--	Class 3 deep drop	5,000 / 500 lbs. drop 3,500 / 350 lbs. rise	--	10"	8"	14"	Gloss black
45152	45157	Fusion	5,000 / 500 lbs.	1 7/8"	--	2"	8 1/8"	Gloss black
45131	45136	Fusion	5,000 / 500 lbs.	1 7/8"	2"	--	7 1/2"	Gloss black
45151	45156	Fusion	5,000 / 500 lbs.	1 7/8"	4"	--	8 1/8"	Gloss black
45155	45159	Fusion	7,500 / 750 lbs.	2"	--	2"	8 1/8"	Gloss black
45134	45139	Fusion	7,500 / 750 lbs.	2"	2"	--	7 1/2"	Gloss black
45041	45041003	Loaded	7,500 / 750 lbs.	2 5/16"	2"	--	8 1/4"	Gloss black
45036	45037	Loaded	7,500 / 750 lbs.	2"	2"	--	8 1/4"	Gloss black
45295	--	Loaded (white box)	7,500 / 750 lbs.	2"	2"	--	8 1/4"	Chrome-plated
45220	--	Dual-length	7,500 / 750 lbs.	--	2"	3/4"	7 1/2" & 10 1/2"	Gloss black
45030	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black
45010	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black
45290	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Chrome-plated
45031	--	Class 3 (pkgd)	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black
45011	--	Class 3 (pkgd)	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black
45032	--	Class 3 (white box)	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black

Part#	Multi-Pack#	Description	GTW / TW	Ball Diameter	Drop	Rise	Length	Finish
2" Shank (Continued)								
45012	--	Class 3 (white box)	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black
45033	--	Class 3 (poly bag)	7,500 / 750 lbs.	--	2"	3/4"	8 1/4"	Gloss black
45040	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	10 1/4"	Gloss black
45020	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	10 1/4"	Gloss black
45296	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	10 1/4"	Chrome-plated
45047	--	Right-angle	7,500 / 750 lbs.	--	2"	3/4"	10 1/4"	Gloss black
45260	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	12 1/4"	Gloss black
45250	--	Class 3	7,500 / 750 lbs.	--	2"	3/4"	12 1/4"	Gloss black
45154	45158	Fusion	7,500 / 750 lbs.	2"	4"	--	8 1/8"	Gloss black
45056	45057	Loaded	7,500 / 750 lbs.	2"	4"	--	8 1/4"	Gloss black
45042	45042003	Loaded	7,500 / 750 lbs.	2 5/16"	4"	--	8 1/4"	Gloss black
45230	--	Dual-length	7,500 / 750 lbs.	--	4"	2"	8 1/8" & 11 1/8"	Gloss black
45050	--	Class 3	7,500 / 750 lbs.	--	4"	2"	8 1/4"	Gloss black
45051	--	Class 3 (pkgd)	7,500 / 750 lbs.	--	4"	2"	8 1/4"	Gloss black
45052	--	Class 3 (white box)	7,500 / 750 lbs.	--	4"	2"	8 1/4"	Gloss black
45060	--	Class 3	7,500 / 750 lbs.	--	4"	2"	10 1/4"	Gloss black
45067	--	Right-angle	7,500 / 750 lbs.	--	4"	2"	10 1/4"	Gloss black
45644	--	Reversible	7,500 / 750 lbs.	--	4"	2"	10 1/2"	Gloss black
45270	--	Class 3	7,500 / 750 lbs.	--	4"	2"	13"	Gloss black
45643	--	Reversible	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	4"	2"	10 1/2"	Gloss black
45070	--	Class 3 deep drop	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	9 1/4"	Gloss black
45297	--	Class 3	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	9 1/4"	Chrome-plated
45240	--	Dual-length	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	9 1/4" & 12 1/4"	Gloss black
45004	--	D-ring	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	10"	Gloss black
45080	--	Class 3 deep drop	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	12 1/4"	Gloss black
45087	--	Right-angle	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	12 1/4"	Gloss black
45280	--	Class 3 deep drop	7,500 / 750 lbs. drop 6,000 / 600 lbs. rise	--	6"	4"	14 1/4"	Gloss black
45310	--	Class 4	10,000 / 1,000 lbs.	--	2"	1"	9 3/8"	Gloss black
45311	--	Class 4	10,000 / 1,000 lbs.	--	4"	2 3/4"	9 3/8"	Gloss black
45336	--	Class 4	10,000 / 1,000 lbs.	--	6"	4 3/4"	9 3/8"	Gloss black
45338	--	Class 4	10,000 / 1,000 lbs.	--	8"	6 3/4"	9 3/8"	Gloss black
45312	--	Class 4	12,000 / 1,200 lbs.	--	2"	1"	9 3/8"	Gloss black
45313	--	Class 4	12,000 / 1,200 lbs.	--	4"	3"	9 3/8"	Gloss black
45446	--	Class 4	12,000 / 1,200 lbs.	--	6"	5"	9 3/8"	Gloss black
45448	--	Class 4	12,000 / 1,200 lbs.	--	8"	7"	9 3/8"	Gloss black
45331	--	Loaded	15,000 / 1,500 lbs.	--	2"	--	8 1/2"	Carbide black
45332	--	Loaded	15,000 / 1,500 lbs.	--	4"	--	8 1/2"	Carbide black
45340	45340002	Forged	17,000 / 2,550 lbs.	--	2"	1"	8 1/2"	Carbide black
45341	45341002	Forged	17,000 / 2,550 lbs.	--	4"	3"	8 1/2"	Carbide black
45342	45342002	Forged	17,000 / 2,550 lbs.	--	6"	5"	9 1/2"	Carbide black
2 1/2" Shank								
45425	--	Heavy-duty	15,000 / 1,500 lbs.	--	3"	1 1/2"	9 1/2"	Carbide black
45426	--	Heavy-duty	15,000 / 1,500 lbs.	--	5"	3 1/2"	10"	Carbide black
45427	--	Heavy-duty	15,000 / 1,500 lbs.	--	8"	6 1/4"	10 1/2"	Carbide black
45456	--	Forged	20,000 / 2,700 lbs.	--	2"	1/2"	8 1/2"	Carbide black
45458	--	Forged	20,000 / 2,700 lbs.	--	4"	2 1/2"	8 1/2"	Carbide black

Looking for dependable trailer hitches and towing? Rely on CURT for quality and long-lasting products.