




DS18[®]




OWNER'S MANUAL

PRO-DPL1


2" THROAT COMPRESSION
DRIVER WITH 2" TITANIUM
VOICE COIL

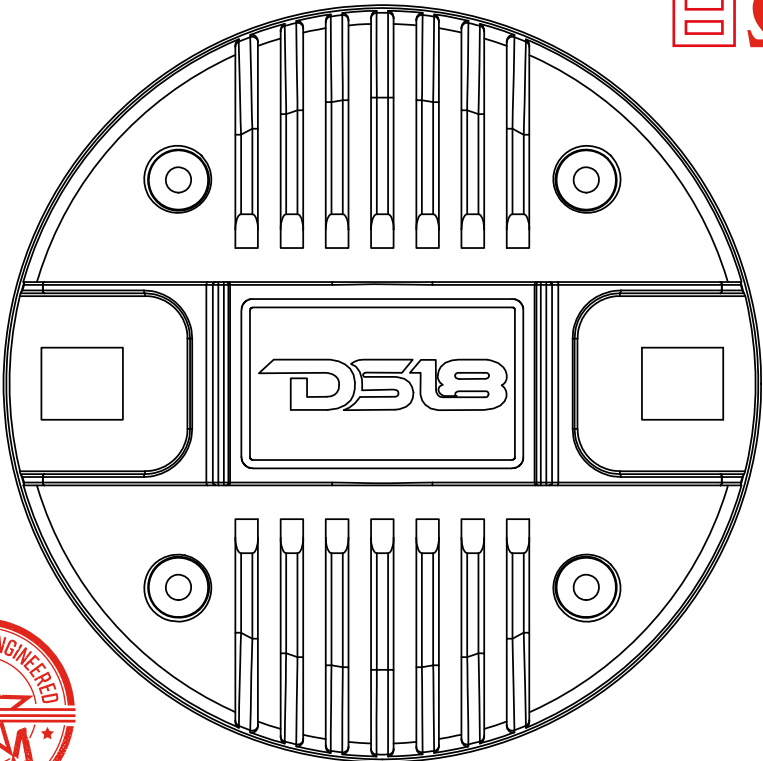

PRO-DPL1

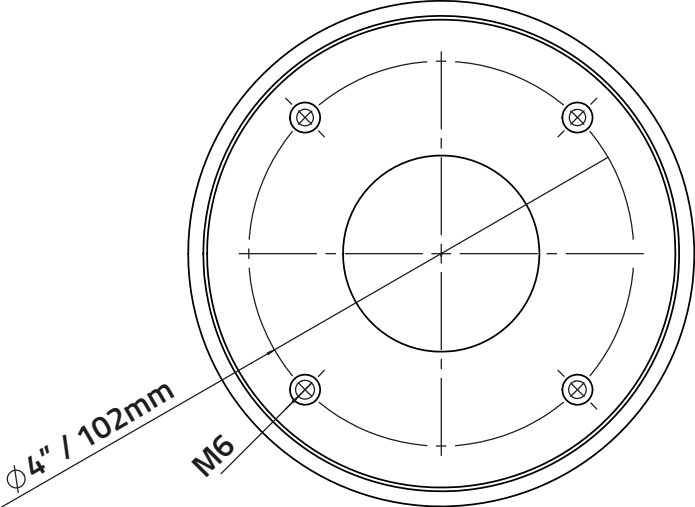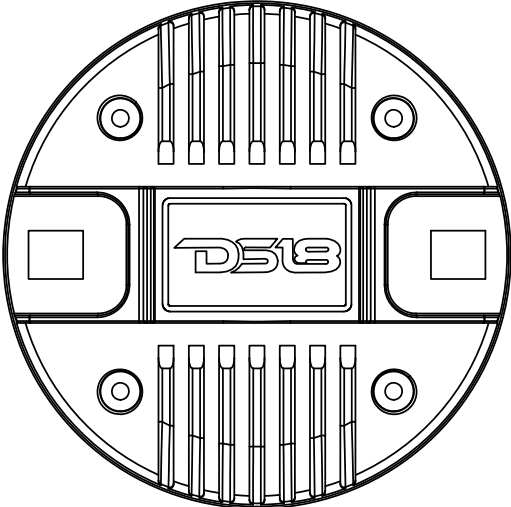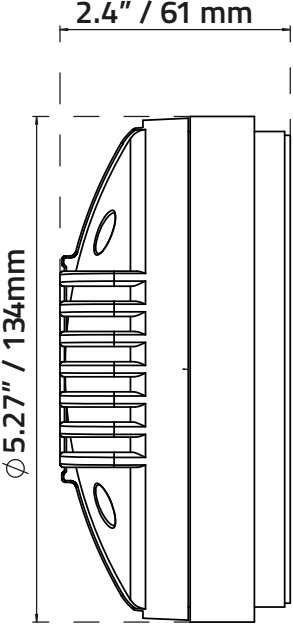

SPL vs Freq

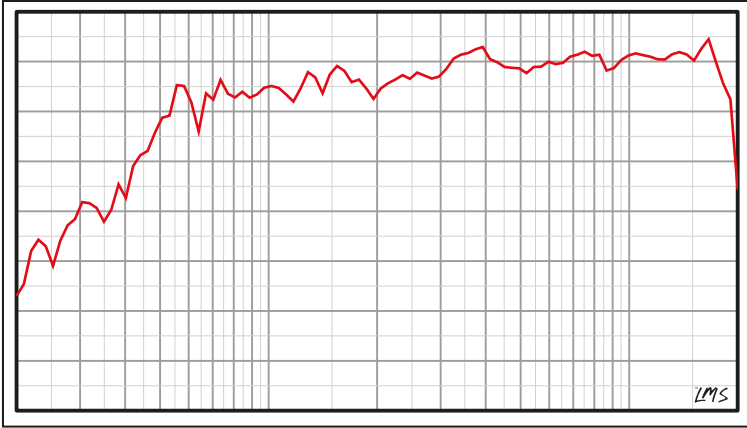

SPECIFICATIONS:

Throat Diameter.....	2" / 50.8 mm
Installation Type.....	Bolt on
Nominal Impedance.....	8 OHMS
AES Power Handling.....	160W
Program Power Handling	320W
Peak Power Handling	640W
Sensitivity (1w/1m)	109dB
Frequency Response	630Hz-20KHz
Recommended Hi Pass Crossover.....	900 Hz

MOTOR:

Voice Coil Diameter	2.03" / 51.5mm
VC Former Material	Kapton
Winding Material	CCA
Diaphragm Material	Titanium
Magnet Material	Ferrite
Magnet Weith	35 Oz
Body Material.....	Plastic Cover

MEASUREMENTS:

Overall Diameter	5.27" / 134mm
Overall Depth.....	2.4" / 61mm
Bolt Pattern - Type4" / 102mm - M6