



## DIRECTIONAL LEDS



### ED9040 SERIES Hide-A-LED™ Concealed Warning

The ED9040 Hide-A-LED Series provides the functionality of a warning light in a low profile design, allowing the vehicle's safe arrival to the scene. SAE Class I light output, synchronization capability, and the choice of 29 flash patterns for single-color and 69 flash patterns for dual-color allow the creation of an attention-getting, multi-color warning system with half the number of lights typically required. The ED9040 offers flexibility with multiple flush mounting applications on virtually any surface including bumpers and on the sides of any vehicle.


#### Models

PART NO.	TYPE	ILLUMINATION COLOR OPTIONS	AMPS
ED9040X	Single	<span style="color:orange">■</span> A <span style="color:blue">■</span> B <span style="color:green">■</span> G <span style="color:red">■</span> R <span style="border:1px solid black; padding:0 2px;"> </span> W	1.2
ED9040XX	Dual	<span style="border:1px solid black; padding:0 2px;">■</span> AG <span style="border:1px solid black; padding:0 2px;">■</span> AW <span style="border:1px solid black; padding:0 2px;">■</span> BA <span style="border:1px solid black; padding:0 2px;">■</span> BW <span style="border:1px solid black; padding:0 2px;">■</span> RA <span style="border:1px solid black; padding:0 2px;">■</span> RB <span style="border:1px solid black; padding:0 2px;">■</span> RW	0.6

Replace X in part number with desired LED color: A = amber, B = blue, G = green, R = red, W = white

#### Features and Benefits

- 12-24 VDC
- Slim low-profile design with 6 powerful LEDs for a bright warning light
- 29 flash patterns (single-color), 69 flash patterns (dual-color)
- All-in-module: all controls imbedded in the head light, avoiding a LED flash controller
- Optimized lens and optical, maximizing light beam in multiple single or dual colors variations
- Discreet flush mount, virtually applicable in any vehicle surface - insertable in a 1" hole, with 10" pigtail cable
- Steady burn and dimmable
- Sync-capable
- Temperature Range: -22°F to +122°F (-30°C to +50°C)

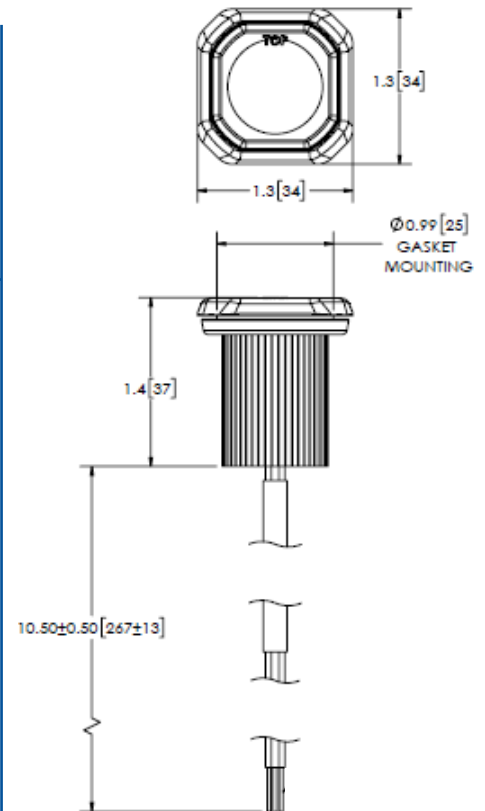

#### Packaging

- Sold as an individual lighthouse
- Each box contains one single ED9040 lighthouse