

**Set # 2-4107**

**ENERGY**  
**SUSPENSION®**

## Removal


**Spray all nuts to be removed generously with your favorite rust buster.**

**Note:** When disassembling, note the quantity and positions of any shims that may have been inserted for body alignment. These shims will have to be reused to insure proper body alignment.

**Remember:** Only raise body high enough to remove & replace mounts. Always watch the fan shroud for sufficient clearance when raising the body. When jacking the body use a long enough 2X4 or 4X4 for maximum support. Never put jack directly on body panels.

Install mounts one side at a time with bolts on other side loosened only.

**Retorque to factory specs.**

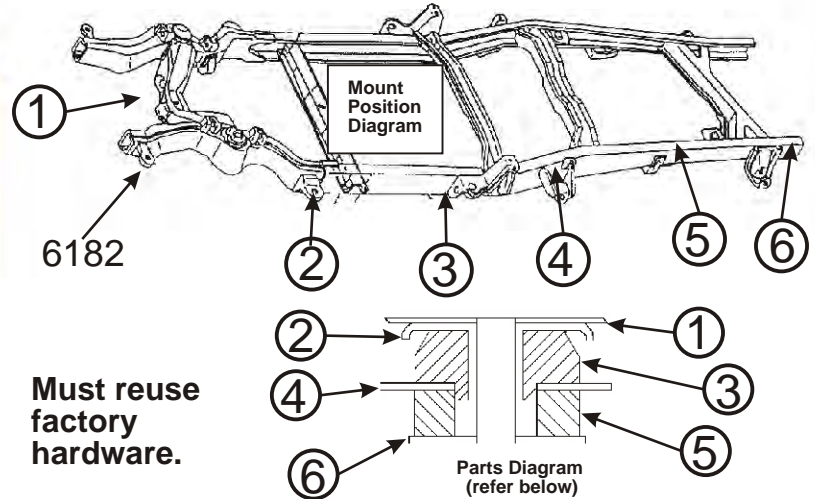

**Must reuse  
factory  
hardware.**

Position 1,5-6

- 1 Body
  - 2 Factory washer sleeve
  - 3 4185
  - 4 Frame
  - 5 4186
  - 6 Supplied washer
- 15.03.09.39

Position 2-4

- 1 Body
  - 2 Factory washer sleeve
  - 3 4183
  - 4 Frame
  - 5 4184
  - 6 Supplied washer
- 15.03.49.39

Learn more about suspension parts on our website.