



**2005 - 2007 FORD SUPER DUTY
2WD FTS22057 [REAR LIFT KIT](#)**

PARTS LIST:

Qua	Part #	Description
4	FT744U	U-Bolt
1	FT58H	U-Bolt Hardware
2	FTBK3	3" Lift Block
1	FTS419	Shim Kit
2	FT220057i	Instruction Sheet

Tool List: (Not Included)

Floor Jack

Jack Stands

Assorted Metric and S.A.E Sockets & Allen Wrenches


READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION!

INSTRUCTIONS:

1. Disconnect the negative terminal on the battery. Jack up the rear end of the vehicle and support the frame rails with jack stands. Supporting the rear differential remove and discard the rear shocks and u-bolts. Lower the axle down slowly. Use care not to over extend the brake hose.

NEVER WORK UNDER AN UNSUPPORTED VEHICLE!

2. Locate and install the rear lift blocks with the short center pin facing down to the axle. The short end of the blocks should face to the front of the vehicle. Using the supplied u-bolts, nuts, and washers align axle, lift blocks, and springs and torque to U-Bolts to 90lbs. SEE PHOTO BELOW

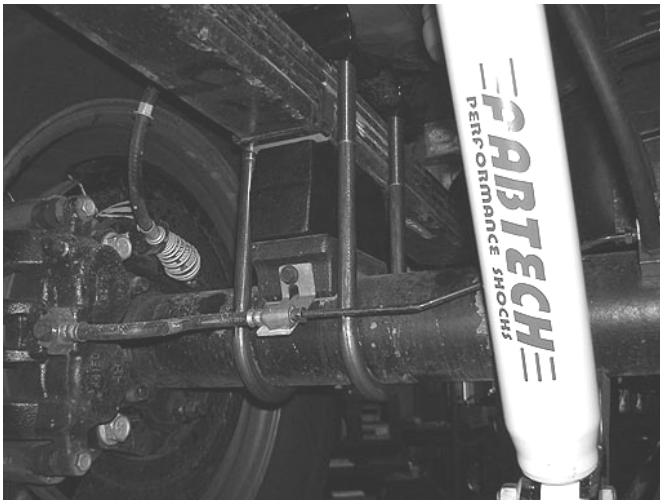

3. Install Fabtech rear shock with the factory hardware and torque bolts to 65lbs.
4. Install FTS419 shim kit as per the instructions in the FTS419 box.
5. Recheck all bolts for proper torque. Recheck brake hoses and lines for proper clearances.
6. Install tires and wheels and torque lug nuts to wheel manufacturers specifications.
7. Re-just headlights.
8. Check the front-end alignment and set to the factory specifications.