

---

## FEL-PRO INSTALLATION TIPS

Fel-Pro products are the result of exhaustive research and strict quality control. However, no sealing product is better than the quality of its installation.

### INTAKE MANIFOLD GASKET

**CLEAN MATING SURFACES** of all foreign material including old gaskets, RTV, and oil. You may wish to use a degreaser.


**CHECK MANIFOLD CASTINGS** for flatness of gasket surface. Resurface or replace if severely distorted or corroded.

### ATTACH AND ALIGN END SEALS

---

**IMPORTANT:** These molded rubber silicone seals must be installed DRY without any chemical adhesive.

---

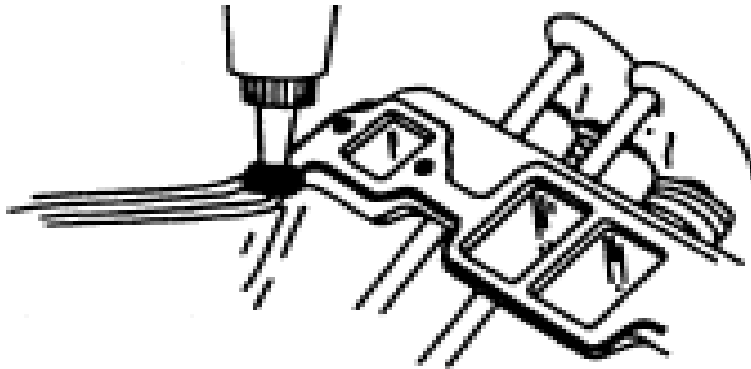

**PRIOR TO REINSTALLING INTAKE MANIFOLD** apply a small dab of silicone sealer to the 4 corner intersections between the end seals and gaskets.

**TEST RUN ENGINE.** Check all mating areas thoroughly to determine that all seals hold during operation.