








KC HiLITES

C-SERIES LED Light Bars



C10 - Part # 334

PHOTOMETRICS

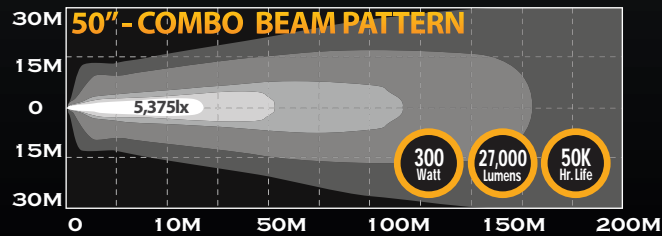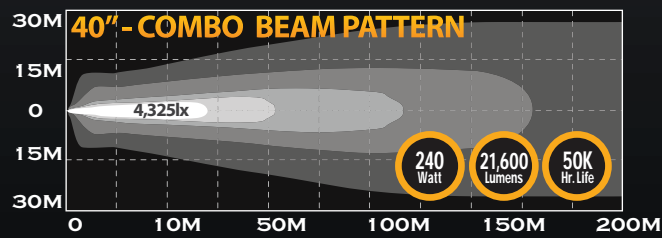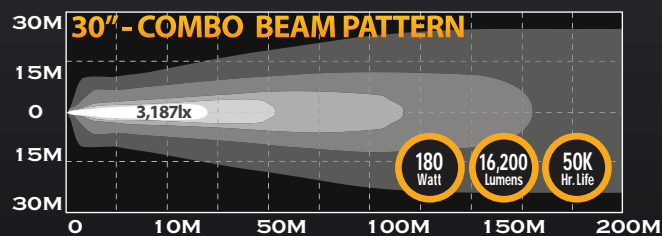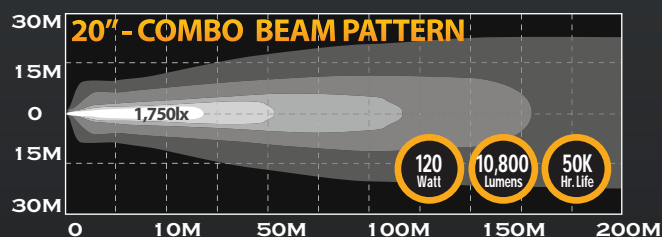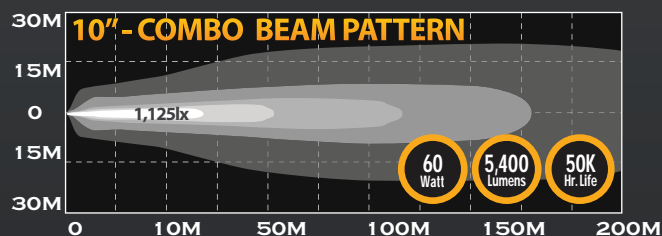


C-SERIES LIGHT BARS

upto **300 Watt**

FEATURES

- CREE 3W XBD LEDs
- Combo Beam Pattern: 12° Spot & 30° Spread
- 6000K Color Temperature
- 50,000 Hour LED Life
- IP67 Rated Extruded Aluminum Housings with Die-Cast Mounting Brackets
- End Caps with GORE® Membranes for Extreme Resistance to Moisture and Dust
- On-Board Thermal Management
- Operates on 9 to 32 Volts
- Includes Wiring Harness with Waterproof Connectors
- For Off-Road Use Only

DIMENSIONS

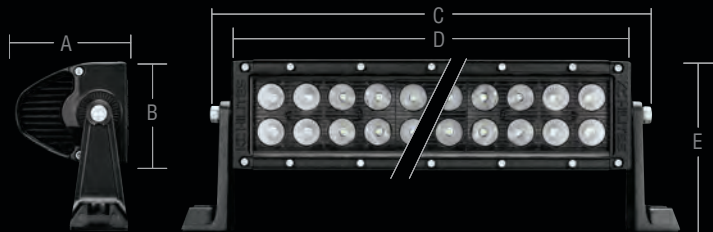

KC C-SERIES LIGHT BARS 10"-50"

Part No.	Model/Description	Beam Pattern	No. of LEDs	Watts	Volts	Lumens	Dimensions				
							A	B	C	D	E
334	C10 - 10" CLEAR LED Light Bar	Combo Spot / Spread	20	60	9-32	5,400	3.40"	3.09"	12.88"	11.38"	4.72"
335	C20 - 20" CLEAR LED Light Bar	Combo Spot / Spread	40	120	9-32	10,800	3.40"	3.09"	22.88"	21.38"	4.72"
336	C30 - 30" CLEAR LED Light Bar	Combo Spot / Spread	60	180	9-32	16,200	3.40"	3.09"	32.88"	31.38"	4.72"
337	C40 - 40" CLEAR LED Light Bar	Combo Spot / Spread	80	240	9-32	21,600	3.40"	3.09"	42.88"	41.38"	4.72"
338	C50 - 50" CLEAR LED Light Bar	Combo Spot / Spread	100	300	9-32	27,000	3.40"	3.09"	52.88"	51.38"	4.72"