



NEW TRUCK WRENCHES

Additions & Updates




Three New Double-Ended Truck Wrenches

| ITEM # | MODEL # | SOCKET SIZES | APPLICATION |
|--------|---------|--------------------------------------|---|
| 32519 | TR99 | 33mm Hex with 13/16" sq X 1-1/2" Hex | SAE inner and outer Budd nuts, and hub piloted wheels. |
| 32559 | TRM6A | 33mm Hex with 21mm sq X 41mm Hex | Metric inner and outer Budd nuts, and hub piloted wheels. |
| 32512 | TR2A | 1" Hex with 5/8" sq X 1-3/16" Hex | Caterpillar and Bobcat equipment, and hub piloted wheels. |
| 32319 | TR5A | 30" Truck Wrench Handle | 8" longer than standard TR5 Truck Wrench Handle for greater leverage. |

Three Double-End Wrenches updated with **deeper sockets** to fit long stud/lug bolts.



| ITEM # | MODEL # | SOCKET SIZES | Change—Longer Stud Clearance |
|--------|---------|---------------------------|-------------------------------------|
| 32506 | TR3X | 1-1/16" Hex X 1-3/16" Hex | 1-3/16 Hex socket—1-3/4" Stud Depth |
| 32553 | TRM3 | 27mm Hex X 30mm Hex | 30mm Hex socket—1-3/4" Stud Depth |
| 32557 | TRM7 | 30mm Hex X 33mm Hex | 30mm Hex socket—1-3/4" Stud Depth |

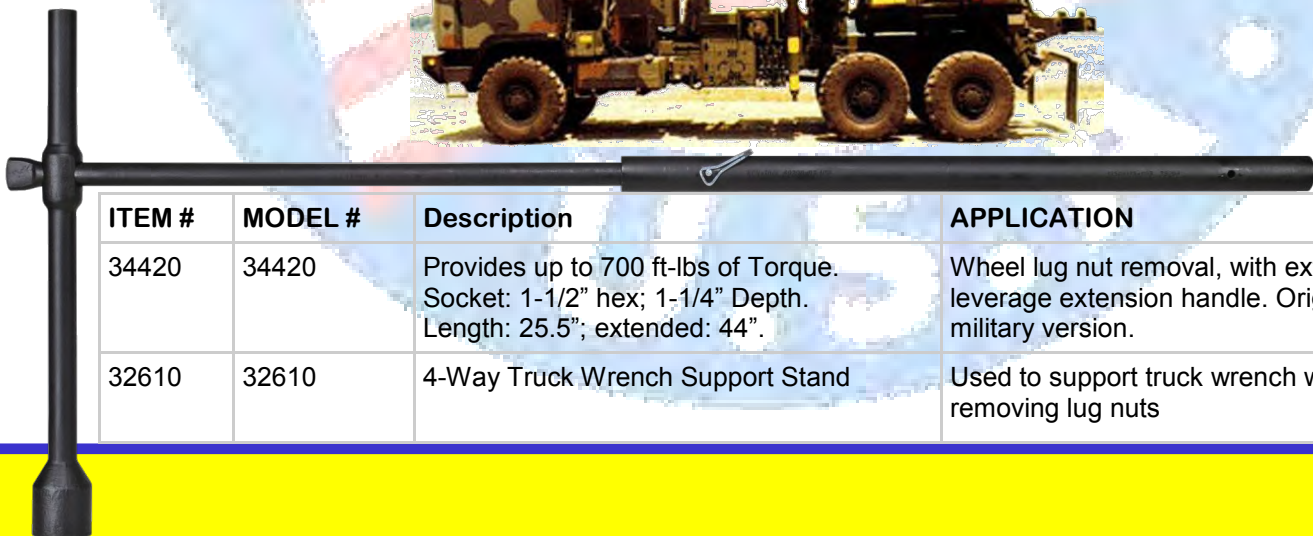

| ITEM # | MODEL # | Description | APPLICATION |
|--------|---------|--|---|
| 34420 | 34420 | Provides up to 700 ft-lbs of Torque. Socket: 1-1/2" hex; 1-1/4" Depth. Length: 25.5"; extended: 44". | Wheel lug nut removal, with extra leverage extension handle. Original military version. |
| 32610 | 32610 | 4-Way Truck Wrench Support Stand | Used to support truck wrench when removing lug nuts |