



# NEW TRUCK WRENCHES

## Additions & Updates




Three New Double-Ended Truck Wrenches

| ITEM # | MODEL # | SOCKET SIZES                         | APPLICATION   |
|--------|---------|--------------------------------------|---|
| 32519  | TR99    | 33mm Hex with 13/16" sq X 1-1/2" Hex | SAE inner and outer Budd nuts, and hub piloted wheels.                |
| 32559  | TRM6A   | 33mm Hex with 21mm sq X 41mm Hex     | Metric inner and outer Budd nuts, and hub piloted wheels.             |
| 32512  | TR2A    | 1" Hex with 5/8" sq X 1-3/16" Hex    | Caterpillar and Bobcat equipment, and hub piloted wheels.             |
| 32319  | TR5A    | 30" Truck Wrench Handle              | 8" longer than standard TR5 Truck Wrench Handle for greater leverage. |

Three Double-End Wrenches updated with **deeper sockets** to fit long stud/lug bolts.



| ITEM # | MODEL # | SOCKET SIZES              | Change—Longer Stud Clearance        |
|--------|---------|---------------------------|-------------------------------------|
| 32506  | TR3X    | 1-1/16" Hex X 1-3/16" Hex | 1-3/16 Hex socket—1-3/4" Stud Depth |
| 32553  | TRM3    | 27mm Hex X 30mm Hex       | 30mm Hex socket—1-3/4" Stud Depth   |
| 32557  | TRM7    | 30mm Hex X 33mm Hex       | 30mm Hex socket—1-3/4" Stud Depth   |

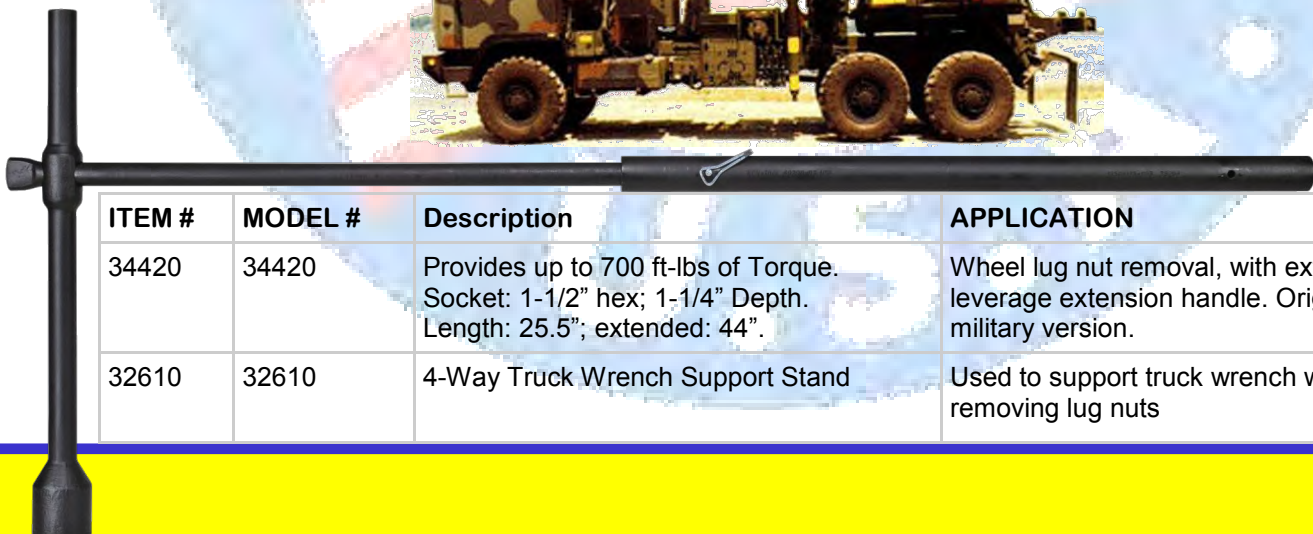

| ITEM # | MODEL # | Description  | APPLICATION   |
|--------|---------|--|---|
| 34420  | 34420   | Provides up to 700 ft-lbs of Torque. Socket: 1-1/2" hex; 1-1/4" Depth. Length: 25.5"; extended: 44". | Wheel lug nut removal, with extra leverage extension handle. Original military version. |
| 32610  | 32610   | 4-Way Truck Wrench Support Stand   | Used to support truck wrench when removing lug nuts                                     |



## Ken-Tool adds to Truck Wrench line

*Includes new plus improved products*

**AKRON, Ohio (March 6, 2012)** – Ken-Tool, the leader in tire service tools, has announced a significant expansion of its double-ended truck wrench product line, with three all new products, and improvements to three current offerings.



The new wrenches are made from forged carbon steel for years of trouble-free service. These wrenches are ideal for trucks, buses, agricultural and other on and off-the-highway equipment. All the wrenches are approximately 16-inches (41 cm.) long, and use the Ken-Tool TR5 and the new TR5A hexagonal wrench handle.

| NEW ITEM #   | MODEL # | SOCKET SIZES                        | APPLICATION  |
|--|---------|-------------------------------------|--|
| 32519  | TR99    | 33mm Hex w/ 13/16" sq X 1/2" Hex    | SAE inner & outer Budd wheel nuts, plus hub piloted wheels                             |
| 32599  | TRM6A   | 33mm w/ 21mm sq X 41mm Hex          | Metric inner & outer Budd wheel nuts, plus hub piloted wheels                          |
| 32512  | TR2A    | 1" Hex w/ 5/8" X 1-3/16" Hex        | Caterpillar & Bobcat equipment and hub piloted wheels                                  |
| 32319  | TR5A    | 30" (76 cm) Truck Wrench Hex Handle | 8" (20 cm) longer than standard TR5 Truck Wrench Hex Handle, provides greater leverage |
| <b>IMPROVED – Double-ended Wrenches with DEEPER SOCKETS (Fits longer wheel studs &amp; lug bolts)</b>    |         |                                     |  |
| <b>Highlighted copy is the change. Original Item/Model numbers remain the same on improved wrenches.</b> |         |                                     |  |
| 32506  | TR3X    | 1-1/16" Hex X 1-3/16" Hex           | 1-3/16" Hex socket – 1-3/4" (4.5 cm) Stud Depth  |
| 32553  | TRM3    | 27mm Hex X 30mm Hex                 | 30mm Hex socket – 1-3/4" (4.5 cm) Stud Depth   |
| 32557  | TRM7    | 30mm Hex X 33mm Hex                 | 30mm Hex socket – 1-3/4" (4.5 cm) Stud Depth   |

Ken-Tool has also introduced the 34420 Heavy Duty Wheel Nut Removal Tool, which has become a standard item in military motor pools. It features 700 ft-lbs of torque capability, and has an integral handle extension for greater leverage on stubborn nuts.

| ITEM # | MODEL # | Description   | Application   |
|--------|---------|---|---|
| 34420  | 34420   | Provides up to 700 ft-lbs (96.8 kg-m) of torque.<br><b>Socket: 1-1/2"; Depth: 1-1/4"</b><br><b>Length: 25.5" (65 cm); extended 44" (112 cm)</b> | Wheel nut removal, w/ extra extended leverage handle; Original MIL-spec version |