



45300

HARMONIC BALANCER PULLER FOR GM


For GM 3300 and 3800 V6 Engines.

Makes pulling easy...without damaging the pulley or shaft or disturbing balance. This tool must be used before replacing the timing chain, camshaft or front engine seal.

Instructions:

1. Remove the harmonic balancer retaining bolt.
2. Insert adapter into the harmonic balancer retaining bolt hole, point first.
3. Thread the main pulling screw into the center of the "ducks foot" body.
4. Align the slots in the body with the 3 holes in the pulley. Thread the 3 shoulder bolts with washers into the harmonic balancer.
5. Tighten the puller screw to pull the balancer from the shaft.

Replacement part numbers on back of card.

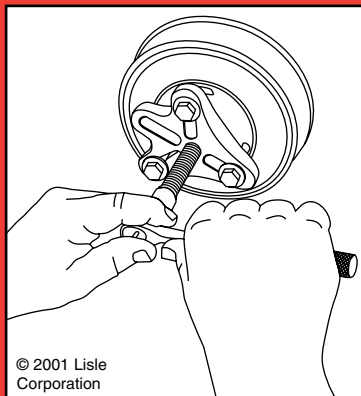

Shop for other automotive tools on our website.