
$L \cup M \equiv N$

72" Remote Controlled Multicolor LED Whip

INSTRUCTIONS

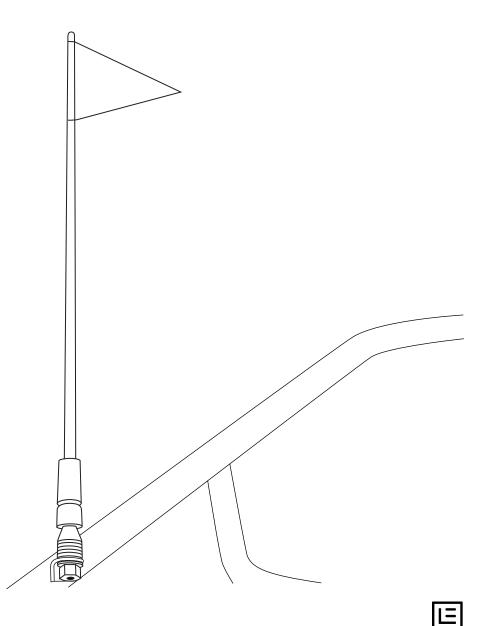

This is a universal item and installation will vary by vehicle. Professional installation is recommended if you are unable to complete the installation yourself.

\gg Tools and supplies needed:

- 19mm wrench
- Wire crimper
- Wire stripper
- Ring terminals



\bigcirc In the box:

- Multicolored LED whip
- Mounting Base
- 19mm nut and washer
- Wiring harness
- Remote Controller



STEP 1. Connect the lighted whip to the harness, then connect the harness to a power source. Ensure all functions of the light are operational.




STEP 2. Locate the attachment area on your vehicle.

STEP 3. Remove the nut and washers from the base of the whip.



STEP 4. First slide the wire through the attachment location, then place the threaded end of the base through the attachment location. Slide the flat washer onto the threaded end of the base, slide the lock washer on after the flat washer, then screw the nut onto the bottom of the base. Tighten the nut with a 19mm wrench.

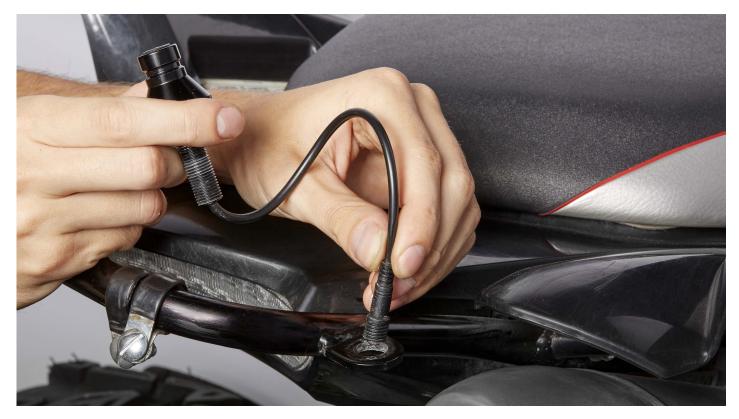






STEP 5. Connect the base to the wiring harness by lining up the arrows and tightening the lock on the connector.




STEP 6. Run the wires from the base to the battery. Make sure the harness does not come into contact with any hot exhaust components or suspension parts. Use cable ties to secure the harness to the vehicle.



STEP 7. Cut and remove any additional length of wire.

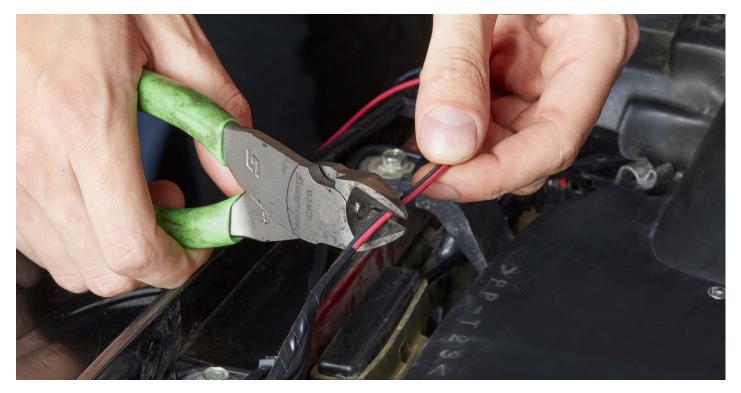


STEP 8. Strip the wires, then connect the ring terminals to the ends of the wire.

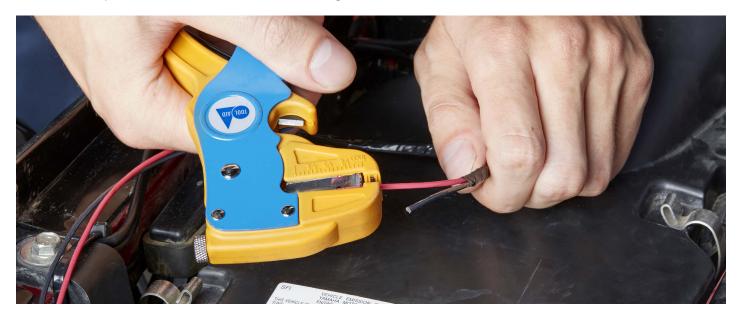






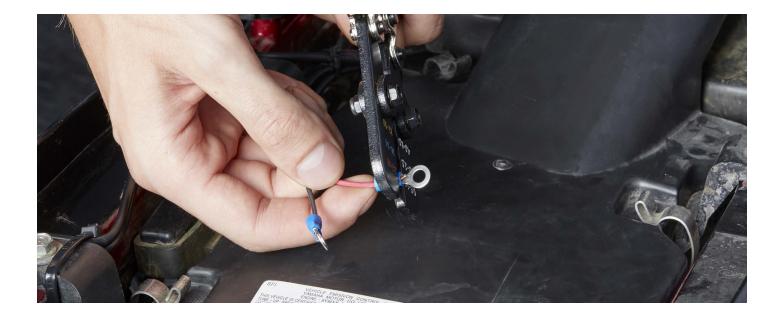

STEP 9. Connect the ring terminals to the battery terminals.

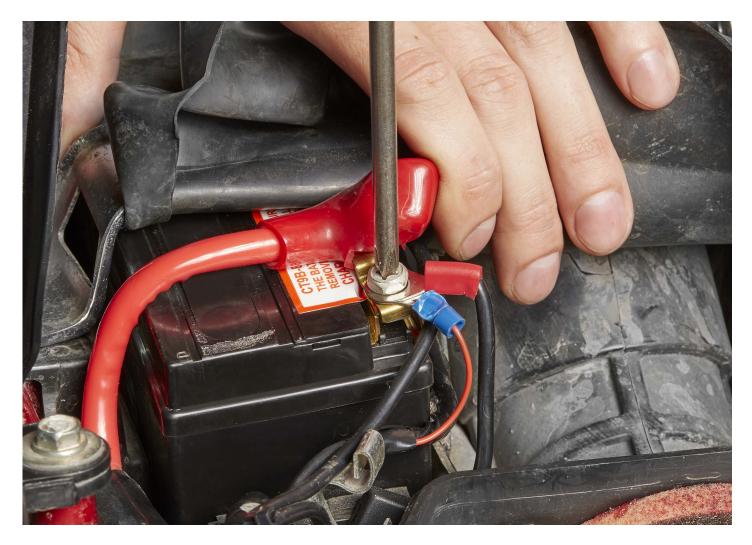

STEP 10. To attach the LED RGB whip to the base, slide the collar on the bottom of the whip upwards, then slide the whip over the top of the base.



STEP 11. Confirm operation of all functions.





Check out other lights offered in our online store.