


HOW TO USE:



Step 1:
Spray sufficient amount of lubricant on surface.



Step 2:
Slide Autoscrub across the lubricated paint or glass surface using a back and forth motion with light to medium pressure.
NOTE: Do not allow the lubricant to run dry on the surface.

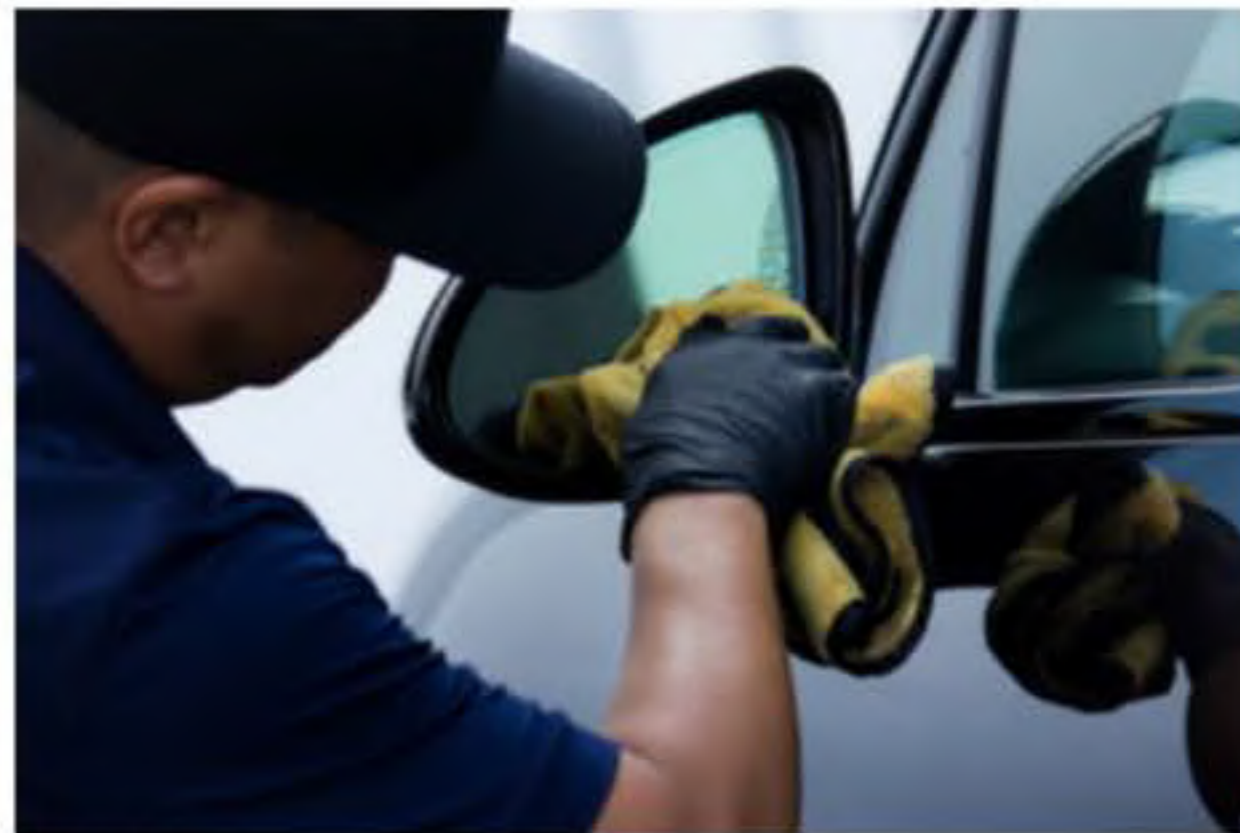

Step 3:
Using a micro fiber towel wipe and buff dry residual lubricant off the surface using light pressure.