

2017 Catalogue

BLISTER

SPLITTERS

BL-N-1000G

2 WAY CATV SPLITTER

- Connects to TVs and/or VCR from one antenna
- 5-1,000MHz 75 ohm CATV signal "F" splitter
- 750Hm Input, 75 ohm UHF-VHF output
- Gold



BL-N-1003G

3 WAY CATV SPLITTER

- Connects to TVs and/or VCR from one antenna
- 5-1,000MHz 75 ohm CATV signal "F" splitter
- 750Hm Input, 75 ohm UHF-VHF output
- Gold



BL-N-1005G

4 WAY CATV SPLITTER

- Connects to TVs and/or VCR from one antenna
- 5-1,000MHz 75 ohm CATV signal "F" splitter
- 750Hm Input, 75 ohm UHF-VHF output
- Gold



BL-KL-412

2 WAY SPLITTER

- 5-1,000MHz
- Silver
- with screws



BL-KL-413

3 WAY SPLITTER

- 5-1,000MHz
- Silver
- with screws



BL-KL-812A

2 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-813A

3 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-814A

4 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws

BLISTER

SPLITTERS



BL-KOD-1002
DIGITAL 2-WAY SPLITTER

- 5-2,300MHz
- Power Pass to all Ports
- Gold
- Splits one digital coaxial Cable Signal into two
- Can be used outdoors



BL-KOD-1003
DIGITAL 3-WAY SPLITTER

- 5-2300MHz
- Power Pass to all Ports
- Gold
- Splits one digital coaxial Cable Signal into three
- Can be used outdoors



BL-KL-832A
2 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-833A
3 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-834A
4 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-836A
6 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-838A
8 WAY SPLITTER

- 5-2,400MHz
- Power Pass to all ports
- Silver
- with screws



BL-KL-920
SATELLITE DIPLEXER

- Allows off-air signals and satellite signals to be fed on a single cable
- Can be used for separating signals as a splitter or combining signals as a combiner.
- DC power pass is provided from the satellite port to the input in order to pass satellite receiver LNB voltage.

Satellite Diplexer

BLISTER

CABLES



BL-AC-006

POWER CORD

- Frequency response: 20-20KHz
- Impedance: 32 ohms
- Sensitivity: 105dB
- 6'



BL-HD-315-6

COMPONENT CABLE

- VGA to RGB component cable
- Flat pin universal cheater cords for tape players
- 6'



BL-V-175G

RCA STEREO AUDIO/VIDEO CABLE

- Oxygen-free
- Fully molded
- Shielded color coded wires
- Gold-plated RCA connectors
- 6'



BL-V-275G

RCA STEREO AUDIO/VIDEO CABLE

- Oxygen-free
- Fully molded
- Shielded color coded wires
- Gold-plated RCA connectors
- Heavy Duty
- 6'



BL-N-203-6G

STEREO AUDIO CABLE

- 2 RCA to 2 RCA
- Gold-plated connectors
- Shielded color coded wires
- 6'



BL-N-211P-6G

STEREO AUDIO CABLE

- 3.5mm to 2 RCA
- Gold-plated connectors
- Shielded color coded wires
- 6'



BLISTER

CABLES



BL-N-3535-6GB
3.5mm STEREO AUDIO CABLE

- 6'
- Black
- Gold connectors



BL-N-3535-6GW
3.5MM STEREO AUDIO CABLE

- 6'
- White
- Gold connectors



BL-IP-35-USB6
3.5mm STEREO PLUG
TO USB CABLE

- 6'
- White
- Gold connector



BL-IP-35-USB6FM
3.5 MM STEREO PLUG TO USB FEMALE


- 6'
- White



Connects to stereo/USB equipment such as car radios to stereo receivers, cassette decks, CD players, etc.



USB



BL-USB-30B30A
USB 3.0 AM TO MICRO BM CABLE

- Super speed USB (USB 3.0) has a 5 Gbps signaling rate offering 10x performance increase over Hi-Speed USB
- Super Speed USB (USB 3.0) is a Sync-N-Go technology that minimizes user wait-time.
- Super Speed USB (USB 3.0) will provide Optimized Power Efficiency. No device polling and lower activate and idle power requirements.
- Super Speed USB (USB 3.0) is backwards compatible with USB 2.0 Devices interoperate with USB 2.0 platforms.



BL-USB-MICROU-3 / BL-USB-MICROU-6
USB AM (male) TO MICRO-USB (male) CABLE

- PVC cable jacket material
- OD: Ø3.8mm
- Available in 3', 6'



Connect a portable device such as cell phone, PDA or digital camera with a USB Micro B Connection to your computer or other USB device.

BLISTER

VIDEO ACCESSORIES



BL-NF-56G

F CONNECTOR FOR COAXIAL CABLE

- For coaxial cable with 6.5mm



BL-F-81G

FEMALE SPLICE CONNECTOR W/NUT

- For coaxial cable
- Gold



BL-F-29AG

INDOOR TV ANTENNA

- Panasonic® type dual antenna
- 5 section row with gold push on F connector
- Built-in 3' coaxial cable



BL-F-33AG

INDOOR TV ANTENNA

- 31" extended, dual chrome 4 section rod antenna
- "F" type connector
- Chromed double loop rings for better reception
- UHF/VHF antenna with coaxial cable and gold "F" type quick connect plug



BL-N-919G

MATCHING TRANSFORMER

- Weather resistant, rubber boot & spade terminal included
- VHF/UHF outdoor
- Gold tips



BL-N-380

"F" TYPE CONNECTOR

- 300 Ω to 75 Ω balun transformer



BLISTER

IBM ACCESSORIES



BL-IBM-205-6

USB CABLE AM (MALE) TO USB CABLE AF (FEMALE)

- Interfaces hi-speed USB 2.0 compliant devices
- 6'



BL-IBM-425-3

PATCH CORD

- Booted
- Stranded
- UL
- 50u gold
- RJ45 plugs
- 3'



BL-IBM-425-6

PATCH CORD

- Booted
- Stranded
- UL
- 50u gold
- RJ45 rings
- 6'



BL-IBM-A-B-6

USB CABLE AM (MALE) TO BM (MALE)

- PVC cable jacket material
- OD: Ø4.5mm
- 6'



BL-IBM-AB-MINI

USB CABLE AM (MALE) TO BM MINI 5 PIN (MALE)

- Interfaces hi-speed USB 2.0 compliant devices
- Making easy plug & play connections
- 10'



BL-IBM-AFAF200

A TYPE FEMALE COUPLER

- Platinum-plated connectors



BL-IBM-MOS300

Optical Wheel Mouse

- Windows and Mac
- Ergonomic design
- Operating distance 150cm



BL-IBM-WLRMOUSE

2.4G OPTICAL WIRELESS MOUSE

- Windows and Mac
- Ergonomic design
- Operating distance: 10 meters



BLISTER

IBM ACCESSORIES



BL-IBM-104USB

USB 4-PORT HUB

- Includes hub and USB cable
- Suitable for notebooks



BL-IBM-USB35-HM

INTEGRATED 2CH USB AUDIO CONTROLLER

- Supports 3D sounds (AC-3) and virtual 5.1 surround sound track
- The best entertainment for listening to DVD, CD's and general online content
- Plug and Play, no software required
- Eliminate the need for a traditional sound card with this USB to audio adapter. Real USB plug & play to upgrade any on-board sound card to 5.1 Digital
- Surround Sound without any hardware installation
- Connect a speaker or headphone directly



BL-IBM-KB350-SP

SPANISH KEYBOARD

- Unique slim design, stylish configuration, comfortable feeling
- Compatible with all operating systems



BL-IBM-KB300

SLIM KEYBOARD

- Unique mute design, style configuration, comfortable feeling
- Compatible with all operating systems
- Multiple language version available



BL-IBM-KM500

WIRELESS KEYBOARD AND MOUSE DESKTOP

- Unique slim design, stylish configuration, Comfortable feeling
- Compatible with all operating systems
- Advanced 2.4 GHz RF Wireless technology provides up to 10 meter range

**Wireless Keyboard
and
Mouse Desktop**



BLISTER

AUDIO ACCESSORIES



BL-P-101TG

AUDIO CONNECTOR

- 1/4" mono plug, gold metal body and tail



BL-P-106MG

AUDIO CONNECTOR

- 3.5mm gold mono plugs, metal body



BL-P-106SG

AUDIO CONNECTOR

- 3.5mm gold stereo plugs, metal body



BL-P-112G

RCA CONNECTOR

- 1/4" gold mono plug to 3.5mm jack



BL-P-119G

RCA SPLICE CONNECTOR

- Molded adapter, jack to jack
- Gold



BL-P-120G

RCA SPLICE CONNECTOR

- Molded adapter plug to plug
- Gold



BL-NF-1G

F QUICK MALE TO F FEMALE CONNECTOR

- Gold



BLISTER

TELEPHONE ACCESSORIES



BL-KR-128

CORD UNTANGLER

- Prevents tangles cords
- Does not affect sound quality
- Automatically rotates to eliminate twisted telephone cords



BL-DSL-F200

DSL SPLITTER

- Filters out DSL signals to allow simultaneous use of telephone and DSL service
- Includes a pass-through jack for modem, eliminating the need for a double adaptor
- Superior design ensures compatibility with cordless phones



BL-KR-200

TELEPHONE ADAPTER

- Modular in-line coupler



BL-KR-202

TELEPHONE ADAPTER

- Modular double adapter



BL-KR-203

TELEPHONE ADAPTER

- Modular triplex adapter



BL-KR-209-15IVO

BL-KR-209-25IVO

TELEPHONE CORD

- Modular handset coiled cord
- 15" - 25"
- Ivory



BL-KR-425-15

BL-KR-425-25

BL-KR-425-50

TELEPHONE CORD

- Modular straight line cord
- 4 pin plug to 4 pin plug
- 15", 25", 50"
- Ivory



BL-KR-468

TELEPHONE JACK

- 4 pin modular surface jack with screws & stick-on pad



BL-KR-468D

TELEPHONE DUAL JACK

- 4 pin modular surface jack with screws & stick-on pad

BLISTER

HDMI SERIES

HM-2002-6CL

HDMI CABLE

- 24K gold-plated connector
- 1080p triple shielded oxygen-free with filter
- Clam shell packing



HM-2002-12CL

HDMI CABLE

- 24K gold-plated connector
- 1080p triple shielded oxygen-free with filter
- Clam shell packing



HMBL-2002-6

HMBL-2002-12

1.4 HDMI CABLE

- 24K gold-plated connector
- 1080p triple shielded oxygen-free with filter
- Blister packing



HMBL-2005-6

HMBL-2005-12

1.4 HDMI CABLE

- 24K gold-plated connector
- 1080p triple shielded oxygen-free filter
- Blister packing



HMBL-2009

HDMI 19 PIN MALE TO HDMI 19 PIN FEMALE RIGHT ANGLE ADAPTER

- 24K gold-plated
- RoHS compliant
- Blister packing



HMBL-2012

HDMI FEMALE ADAPTER

- In-line coupler
- Allows you to link two HDMI cables
- Blister packing



BLISTER

HDMI SERIES

HM-2002-6RA

HDMI CABLE A MALE TO A MALE (right angle)

- 1.4 version (High Speed with Ethernet)
- Gold-plated
- 1.4 HDMI cable
- It can work for all previous HDMI 1.3 devices, also supports HDMI Ethernet Channel, Audio Return Channel, 3D, 4K Content Types, Deep Color and x.v.Color
- 6'



HM-2002-12RA

HDMI CABLE A MALE TO A MALE (right angle)

- 1.4 version (High Speed with Ethernet)
- Gold-plated
- 1.4 HDMI cable
- It can work for all previous HDMI 1.3 devices, also supports HDMI Ethernet Channel, Audio Return Channel, 3D, 4K Content Types, Deep Color and x.v.Color
- 12'



HM-2002-6SWL

180° SWIVEL TYPE, HDMI CABLE
A MALE TO A MALE

- 1.4 version (High Speed with Ethernet)
- Gold-plated
- 1.4 HDMI cable
- It can work for all previous HDMI 1.3 devices, also supports HDMI Ethernet Channel, Audio Return Channel, 3D, 4K Content Types, Deep Color and x.v.Color
- 6"



HM-2002-12SWL

180° SWIVEL TYPE, HDMI CABLE
A MALE TO A MALE

- 1.4 version (High Speed with Ethernet)
- Gold-plated
- 1.4 HDMI cable
- It can work for all previous HDMI 1.3 devices, also supports HDMI Ethernet Channel, Audio Return Channel, 3D, 4K Content Types, Deep Color and x.v.Color
- 12"



HMC-HM-005-6 / HMC-HM-005-12

HDMI MALE TO MICRO-HDMI MALE

- Available in 6', 12'
- Connect a portable device such as cell phone, PDA, or digital camera with a USB Micro B Connection to your computer or other USB device



BLISTER

VGA CABLES



BL-VGA-F-M-6G

VGA FEMALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024 x 768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 6'



BL-VGA-M-M-6G

VGA MALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024 x 768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 6'



BL-VGA-F-M-12G

VGA FEMALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024 x 768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 12'



BL-VGA-M-M-12G

VGA MALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024 x 768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 12'



BLISTER

ADAPTERS / POWER STRIPS



BL-P-510

ADAPTER

- Flat pin plug to round socket



BL-P-514

GROUND ADAPTER

- 3 prong plug to two prong outlet, permits "U" ground



BL-P-517G

MULTI-ADAPTER

- Adapts to the plug of your electronic product for use in North America and most South America outlets
- Does not convert power



13-414

6 OUTLET AC POWER STRIP

- High impact, fire-retardant plastic housing
- Outlets: 6 "U" ground
- Power supply: 14AWG x 3C SJT
- Length: 3'
- Switch: lighted approach switch
- Max rating: 15A/120V AC/60Hz/1800 Watts
- **90 JOULES** surge suppressor to protect sensitive electronic equipment
- For indoor use and dry locations



13-6400

6 OUTLET AC POWER STRIP

- High impact, fire-retardant plastic housing
- Outlets: 6 "U" ground
- Power supply: 14AWG x 3C SJT
- Length: 2'
- Switch: lighted approach switch
- Max. rating: 15A/120V AC/60Hz/1800 Watts
- **400 JOULES** surge suppressor to protect sensitive electronic equipment
- For indoor use and dry locations



BLISTER

WALL OUTLETS



14-512

3 OUTLET GROUNDED WALL SOCKET


- For indoor use only
- Use in dry conditions
- 110V



14-516

6 OUTLET WALL TAP SURGE PROTECTOR

- For indoor use only
- Use in dry conditions
- 400V



14-519

3 OUTLET SWIVELING GROUNDED WALL SOCKET

- For indoor use only
- Use in dry conditions
- 110V



16-516S

6 OUTLET WALL SOCKET

- High Impact, Fire-Retardant Plastic Housing
- Outlets: 6 "U" Ground
- Max Rating: 15A / 125V AC/60Hz/1875W
- 1000 Joules Surge Suppressor to protect sensitive Electronic Equipment
- For indoor use only and dry locations
- Can swivel to redirect Power and safely slide all your furniture back
- Creates extra space where you need it most



HDMI SERIES

SWITCHES / SPLITTERS



HD-0102

1 X 2 HDMI SPLITTER

- Input Video Signal: 0.5-1.0 volts p-p
- Input DDC Signal: 5 volts p-p (TTL)
- Max Single Link Range: 1920x 1080, 1080p
- HDMI Resolution: 480p/576p/720p/1080i/1080p, 3D(1080p/24Hz)
- DVI Resolution: 480p/576p/720p/1080i/1080p
- HDMI Version: HDMI 1.3b
- Bandwidth: Up to 225MHz
- EDID Duration: 4 seconds
- Power Supply: DC 5V@1A



HD-0104

1 X 4 HDMI 1.3 SPLITTER

- Video input: 1 x HDMI
- Video output: 4 x HDMI
- DDC input signal: 5 volts p-p
- External power supply: 5V DC @ 3A
- Output video: HDMI 1.3b
- Max. power consumption: 5W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A



HD-0204

2 X 4 HDMI 1.3 MATRIX SPLITTER

- Video input: 2 x HDMI
- Video output: 4 x HDMI
- DDC input signal: 5 volts p-p (TTL)
- External power supply: 5V DC @ 2.5A
- Max. power consumption: 15W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A



HD-0208

2 X 8 HDMI 1.3 MATRIX SPLITTER

- Video input: 2 x HDMI
- Video output: 8 x HDMI
- DDC input signal: 5 volts p-p (TTL)
- External power supply: 5V DC @ 2.5A, 3A
- Max. power consumption: 15W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A

HDMI SERIES

SWITCHES / SPLITTERS



HDM-0201

2-WAY HDMI SELECTOR

- DDC input signal: 5 volts p-p (TTL)
- External power supply: 5V DC @ 2A
- Output video: HDMI 1.3b
- Vertical frequency range: 50/60Hz
- Max. power consumption: 5W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A



HDM-0301

HDMI MINI SWITCHER

- Supports 12-bit deep color, full 1080p
- Multifunctional on switching: intelligent or mechanical
- Support with HDMI 1.3b
- High performance up to 2.5Gbps
- Maintains high resolution video - beautiful, sharp HDTV resolutions up to 1080p, 2k, 1440p graphics and computer resolution up to 1920 x 1200 are easily achieved



HD-0301R

3 WAY HDMI SELECTOR

- With remote control + intelligent switcher + amplifier
- DDC input signal: 5 volts p-p (TTL)
- External power supply: 5V DC @ 2A
- Output video: HDMI 1.3b
- Vertical frequency range: 50/60Hz
- Max. power consumption: 5W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A
- Select from 3 HDMI sources to 1 output source



HD-0401R

4 WAY HDMI SELECTOR

- With remote control + intelligent switcher + amplifier
- DDC input signal: 5 volts p-p (TTL)
- External power supply: 5V DC @ 2A
- Output video: HDMI 1.3b
- Vertical frequency range: 50/60Hz
- Max. power consumption: 5W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A

HDMI SERIES

CONVERTERS / SPLITTERS



HDC-VGA35

HDMI CONVERTER

- VGA + R/L audio to HDMI
- Input video signal: 0.5-1 volts p-p
- External power supply: 5V DC @ 2A
- Output video: HDMI 1.2a
- Vertical frequency range: 50/60Hz
- Max. power consumption: 5W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A



HDC-VRCA01

HDMI CONVERTER

- Composite video or S-video + R/L audio to HDMI
- Input DDC signal: 5 volts p-p (TTL)
- External power supply: 5V DC @ 2A
- Output video: HDMI 1.3b
- Vertical frequency range: 50/60Hz
- Max. power consumption: 5W
- Multi-voltage: 100-240V, 50-60Hz, 0.5A



VGA-SPLT-1X4

1 X 4 VGA SPLITTER WITH AUDIO

- Input video signal: 1.2volt p-p
- Maximum single link range: 1920x1200, 1080p
- Vertical frequency range: 30-170Hz
- Video amplifier bandwidth: 500MHz
- Input: VGA 15pin male
- Output: VGA 15pin female
- Size: 165x92x45mm
- Net weight: 450g
- External power supply: 5V DC @ 2A
- Max. power consumption: 5W



VGA-VSPL-1004

1 X 4 VGA SPLITTER WITHOUT AUDIO

- Supports 1920x1080 @ 60Hz
- Bandwidth: 350MHz
- Supports DDC2B
- Scaler is included to enhance signal
- Compatible with VGA/SVGA/XGA/SXGA/WSXGA/UXGA/QXGA
- Input: 100-240V, 50/60Hz
- Output: 5V DC 1000mA
- Adapter included

HDMI SERIES

ADAPTERS



HMA-HF-HM

HDMI SOCKET TO HDMI M-MINI PLUG

- Commonly used for TVs and digital camcorders to convert HDMI cable ends into a HDMI mini connector
- F adaptor



HMA-H-HMF

HDMI M-MINI SOCKET TO HDMI

- Commonly used for TVs and digital camcorders to convert HDMI mini cable ends into an HDMI connector
- F adaptor



HM-2000R

HDMI REPEATER

- Actual Bandwidth: 1.6 GHz
- Input Video Signal: 1.2 Volts p-p
- Input DDC Signal: 5 Volts
- Power Supply: External 5V DC
- HDMI Amplifier bandwidth: 1.65 GHz
- Amplifies Signal between linked HDMI Cables
- HDMI Input/Output Connector: 15 Watts



HM-2009

HDMI ADAPTER

- HDMI 19 pin male to HDMI 19 pin female right angle
- 24K gold-plated
- RoHS compliant



HMBL-2009

HDMI ADAPTER

- HDMI 19 pin male to HDMI 19 pin female right angle
- 24K gold-plated
- RoHS compliant
- Blister packing



HM-2012

HDMI FEMALE ADAPTER

- Cable coupler
- Allows you to link two HDMI cables



HMBL-2012

HDMI FEMALE ADAPTER

- Cable coupler
- Allows you to link two HDMI cables
- Blister packing



HDMI SERIES

CABLES



HMF-2002-6
HDMI MALE TO HDMI FEMALE
• 6' / 12'
• with filter



HMM-1005-6
HMM-1005-12
MINI HDMI MALE TO
HDMI MALE
• 6' / 12'



HMMM-1105-6
MINI HDMI MALE TO MINI
HDMI MALE
• 6'
• with filter



VGA-M-M-12
VGA MALE TO VGA MALE CABLE
• Ideal for high resolution monitors (1024x768 and above)
• Triple-coaxial + twisted-pair wire for crystal clear images
• Impedance matched @ 75 ohms for full brightness and vibrant picture color
• 12'



VGA-M-M-25
VGA MALE TO VGA MALE CABLE
• Ideal for high resolution Monitors (1024 x 768 and above)
• Triple-coaxial + twisted-pair wire for crystal clear images
• Impedance matched @ 75 Ohms for full brightness and vibrant picture color
• 25'

This cable is used to extend out a VGA monitor which is connected into a desktop PC.



VGA-M-M-50
VGA MALE TO VGA MALE CABLE
• Ideal for high resolution Monitors (1024 x 768 and above)
• Triple-coaxial + twisted-pair wire for crystal clear images
• Impedance matched @ 75 Ohms for full brightness and vibrant picture color
• 50'

This cable is used to extend out a VGA monitor which is connected into a desktop PC.



VGA-M-M-100
VGA MALE TO VGA MALE CABLE
• Ideal for high resolution monitors (1024x768 and above)
• Triple-coaxial + twisted-pair wire for crystal clear images
• Impedance matched @75 ohms for full brightness and vibrant pictures color
• Ferrite core eliminates EMI interference
• Molded connector ends with strain relief
• 100'

HDMI SERIES

CABLES



VGA-F-F

FEMALE TO FEMALE ADAPTOR

- Adapts VGA cables, projectors, and monitors to the connections you need
- Screw-down terminals create secure, trouble-free connections
- Gold plated contacts ensure solid signal transfer



VGA-F-M-6

VGA FEMALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024x768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 6'



VGA-F-M-12

VGA FEMALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024x768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 12'



VGA-M-2F

VGA MALE TO 2 VGA FEMALE CABLE

- Ideal for high resolution monitors (1024x768 and above)
- Ferrite core eliminates EMI interference
- Molded connector ends with strain relief
- 12"



VGA-M-M-6

VGA MALE TO VGA MALE CABLE

- Ideal for high resolution monitors (1024x768 and above)
- Triple-coaxial + twisted-pair wire for crystal clear images
- Impedance matched @ 75 ohms for full brightness and vibrant picture color
- 6'

HDCBL-0102

HDMI MALE TO 2-FEMALE SPLITTER CABLE

- 7.9" (20cm)
- Home Theater Interconnects
- Digital Interface HDMI Audio & Video Cable
- High Definition Multimedia interface is a new digital, which will bring you the purest picture and sound
- Delivers best high-frequency response for optical resolution using silver-plated conductor
- Maintains stronger signal that yield superior sonic and video accuracy with precision formulated, polyethylene dielectric material
- Isolated from outside noise for superior clarity with quad-shielding
- Reduces cross talk and interference using impedance-matched, twisted-pair construction
- Protects against wire damage for consistently high-quality audio & video with integrated strain relief



HDMI SERIES

CABLES

HM-2002-6CL

HDMI CABLE WITH FILTER

- 24K gold plated connector
- 1080p triple shielded oxygen-free
- Ferrite core filter
- Clam shell packing
- 1.4V
- 6'



HM-2002-12CL

HDMI CABLE WITH FILTER

- 24K gold plated connector
- 1080p triple shielded oxygen-free
- Ferrite core filter
- Clam shell packing
- 1.4V
- 12'



HM-2002-6

HM-2002-12

HM-2002-25

HM-2002-50

HDMI CABLE WITH FILTER

- Gold connectors
- Available in 6', 12', 25', and 50'
- 1.4V



HM-2005-3

HM-2005-6

HM-2005-9

HM-2005-12

HM-2005-25

HM-2005-50

HDMI CABLE

- Gold connectors
- Available in 3', 6', 9', 12', 25', and 50'
- 1.4V



HMBL-2002-6

HMBL-2002-12

HDMI CABLE WITH FILTER

- Gold connectors
- Available in 6' and 12'
- 1.4V



HMBL-2005-6

HMBL-2005-12

HDMI CABLE

- Gold connectors
- Available in 6' and 12'
- 1.4V



HM-2007-6

HDMI TO DVI CABLE

- 6'
- 1.4V



HM-2010-6

DVI-D DUAL LINK CABLE

- 6'
- 1.4V



HM-0005-6

HDMI CABLE

- 6'
- 1.4V



HDM-3D14RP-75

HDMI WITH BOOSTER

- Copper 75 FT



HDM-3D14RP-100

HDMI WITH BOOSTER

- Copper 100 FT



HDMI SERIES

CONVERTERS

CV-HMVGA

HDMI TO VGA CONVERTER

- Allows monitors with VGA to connect devices via HDMI port



CV-MHMVGA

MICRO HDMI TO VGA CONVERTER

- Allows monitors with VGA to connect devices via Micro HDMI port



CV-MUSBER

MICRO USB TO ETHERNET PORT ADAPTER

- Micro USB 2.0 Male to RJ45 female Ethernet 10/100 Mbps Network LAN Adapter Cable for Apple MacBook, Lenovo, ThinkPad, Dell, Sony, Samsung, Acer, Asus, and other laptop brands



CV-MUSBVGA

MICRO USB TO VGA CONVERTER

- Allows users with existing monitors with VGA to connect their devices via Micro USB port. Besides extracting audio out, it can also get extra power for devices through micro USB port



HDMI SERIES

CONVERTERS / ADAPTERS

CV-MDPHDM

This is a mini DisplayPort to HDMI Cable Adapter for interfacing Display-Port based PC and notebook computers with high definition displays. The converter facilitates the transition by offering seamless connectivity between new DisplayPort PC and the installed base HDMI monitors and projectors.

- Mini DP Male to HDMI Female Adaptor
- Connect your iPod, Macbook
- Gold plated connector
- Support 3D/1080p
- 100% Triple shield



CV-MDPVGA

MINI DISPLAY TO VGA ADAPTER

- Connect your Mac, or other Mini Display Port equipped computer, directly to your VGA equipped display with this Mini Display Port to VGA Adapter
- Supports Display Port 1.1 input and VGA output
- Supports PC resolutions up to 1920x1200 and HDTV resolutions up to 1080p
- Easy to use adapter, no software required
- Powered from Mini Display port source
- No external power needed
- Output video: RGB analog video
- Complies with Display Port 1.1 standard



CV-MUSBC5

USB 2.0 Male to RJ45 Female Ethernet 10/100 Mbps Network LAN Adapter Cable for Apple MacBook, Lenovo, ThinkPad, Dell, Sony, Samsung, Acer, Asus, and other laptop brands.

- USB 2.0 A to Ethernet Port Adapter
- Enables Internet connection via USB port
- Powered by USB port, no external power adapter required
- Half/Full duplex 10/100 Mbps operation
- Self-adapting 10 Mbps or 100 Mbps network adapter
- Compliant to USB interface version 1.0/1.1/2.0
- Compatible with Windows 98SE/ME/2000/2003/XP/Vista/Windows7



HDMI SERIES

CONVERTERS



PCTV-U-HDMI

USB TO HDMI CONVERTER UP TO 1080P

- 3.5mm Audio Output
- Dimensions(L x W x H): 16.5x52x80mm
- Powered by USB
- HDMI Output
- Output resolution: UP to 1080p
- Weight: 78.5g
- USB to HDMI HD Video Leader



PCTV-VGA-CMPS

PC TO PC CONVERTER

- Supported VGA resolution: 640x480@60/72/75/85Hz, 800x600@60/75Hz, 1024x768@60Hz/75Hz
- Simultaneous Output of VGA, Video and S-VIDEO Signals
- Synchronous display of pictures on both the computer monitor and the TV display
- Power supply from the USB port(and power transformer can be used when current is not enough from USB ports)
- Both PC and MAC machines supported
- Both PAL system and NTSC system supported
- Light, thin short, small for good portability



PCTV-VGAU-RCASA

PC TO TV CONVERTER

- Input: 1xVGA
- Loop-through Outputs: 1xVGA, 1xComposite Video, 1XS-video
- VGA resolution: 640x480(60/75Hz), 800x600(60/75Hz), 1024x768(60/75Hz), 1280x768(60Hz), 1280x1024(60Hz)
- Output Signal: CVBS(1.0Vpp),S-video(Y:1.0pp, C:003Vpp)
- Output signal Impedance: 75Ω
- Power: DC 5V 1A
- Working Temperature: 25~75°C
- Working Humidity: 10%~65%

HD-DIGI-ANA

HD VIDEO PROCESSING

- Converts S/PDIF or Optical (Toslink) to analog R/L Audio signal.
- Supports 2 channels LPCM digital audio only
- Supports sampling rate at 32, 44.1, 48 and 96KHz
- Input: S/PDIF x 1, Toslink x 1
- Output: L/R Audio x 1, 3.5mm Audio x 1
- Dimensions: 76 x 56 x 22mm
- Weight: 47g



HD-VRCA-HDMI

MINI AV TO HDMI 1080P SCALER

- Input: 1 x Composite Video, 1 x R/L Audio
- Output: 1 x HDMI
- Up-scales CVBS signal to full HD 1080p
- HDMI output is optional at 720P 50Hz/60Hz (LED: Red) or 1080P 50Hz/60Hz (LED Green)
- Detect PAL/NTSC automatically
- HDMI Output: 720p/1080p 50Hz/60Hz (Output Resolutions)
- Power Supply: 5V1A
- Power consumption: 2.5W
- Dimension: 105.5 x 64.5 x 23mm
- Material: ABS
- Plug and play, no software needed.




HDMI SERIES


HDMI IP DIAGRAM



ROUTER CONNECTION

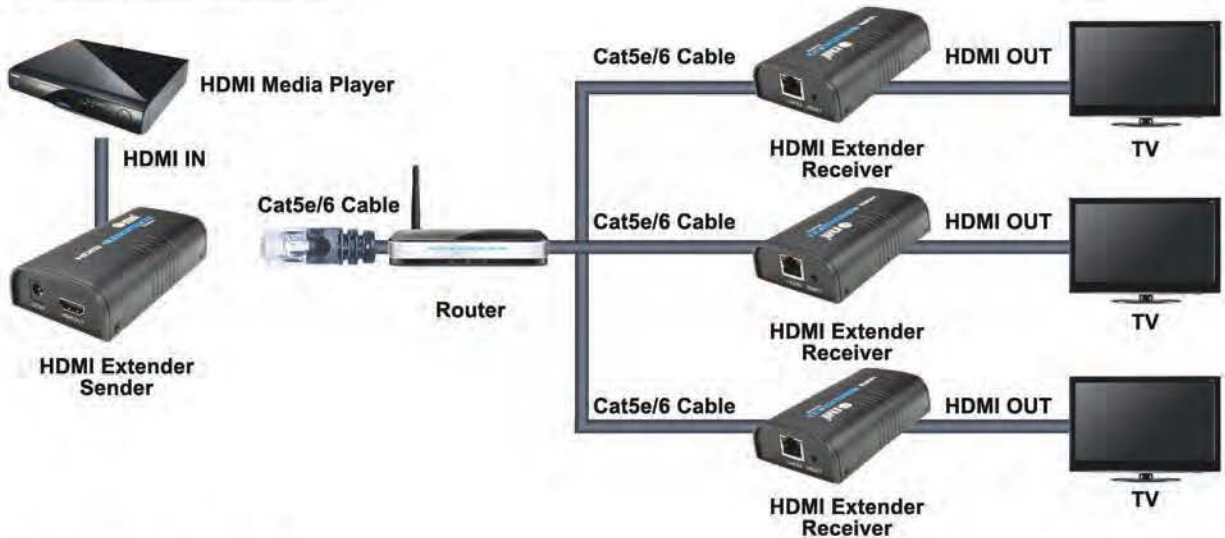

LAN CONNECTION

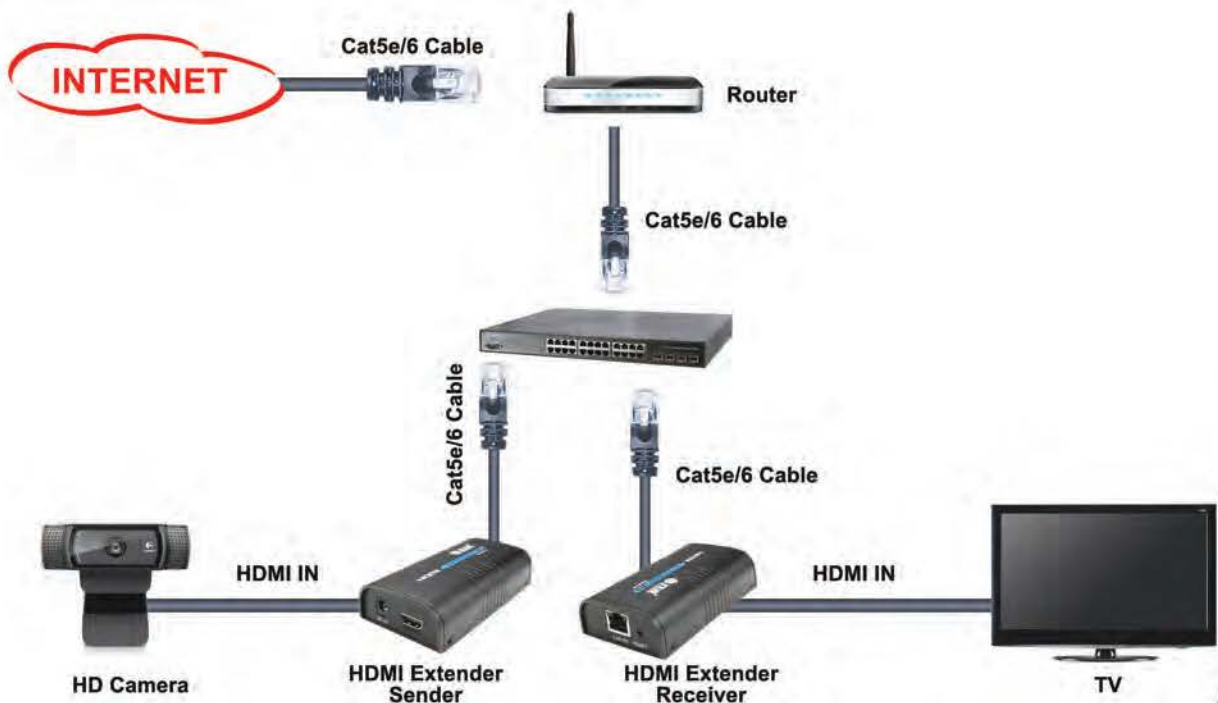

HDMI SERIES

HDMI IP EXTENDER



RECEIVER / RECEIVER

HD-EX120RR

HDMI IP EXTENDER OVER SINGLE CAT5E/6

- Power Supply: 2x 5V DC/1A
- Supports resolutions: 480i/60Hz, 480p/60Hz, 576i/50Hz, 576p/50Hz, 720p/50/60Hz, 1080i/50/60Hz, 1080p/50/60Hz
- Working Temperature: -10°C~60°C
- Link Connector(Sender/Receiver): UTP/STP CAT5e/6
- Power Consumption: 3W(max) each
- Relative Humidity: 20%~90%
- Dimensions: 4.3"x2.3"x1.0"(110x58x26mm)
- Weight:0.53Lbs(0.239Kg)
- Sold by part



SENDER / RECEIVER

HD-EX200SR

HDMI IP EXTENDER OVER SINGLE CAT5E/6

- Power supply: 2 x 5V DC/1A
- Support resolutions: 480i/60Hz, 480p/60Hz,576i/50Hz, 576p/50Hz, 720p/50/60Hz, 1080i/50/60Hz, 1080p/50/60Hz
- Working temperature: -10°C ~ 60°C
- Link connector (sender/receiver): UTP/STP CAT5e/6
- Power consumption: 3W (max) each
- Relative humidity: 20%~90%
- Dimensions: 4.3" x 2.3" x 1.0" (110 x 58 x 26 mm)
- Weight: 0.53 Lbs (0.239 Kg)
- Sold by part



VIDEO & AUDIO ACCESSORIES

HEADPHONES



HP-27

STEREO EARPHONES - BLACK

- Driver unit: 15mm mylar speaker
- Frequency response: 20-20kHz
- Impedance: 32 ohms
- Sensitivity: 100dB (at 1kHz)
- Input connection: 3.5mm stereo plug



HP-67

STEREO EARPHONES - BLACK

- Driver unit: 15mm neodymium speaker
- Frequency response: 20-20kHz
- Impedance: 32 ohms
- Sensitivity: 102dB (at 1kHz)
- Input connection: 3.5mm stereo plug



HP-67WH

STEREO EARPHONES - WHITE

- Driver unit: 15mm neodymium speaker
- Frequency response: 20-20kHz
- Impedance: 32 ohms
- Sensitivity: 102dB (at 1kHz)
- Input connection: 3.5mm stereo plug



HD-170MCP

HEADPHONE MICROPHONE
COMPUTER SET - BLACK

- Speaker type: Ø27mm dynamic
- Frequency response: 20-20kHz



- Impedance: 32 ohms
- Sensitivity: 100dB
- Max. input power: 1KwW
- Plug: Ø3.5mm (5/32")
- Microphone: condenser



HD-180MBK

HEADPHONE MICROPHONE
COMPUTER SET - BLACK

- Speaker type: Ø30mm dynamic
- Frequency response: 20-20kHz




- Impedance: 32 ohms
- Sensitivity: 100dB
- Max. input power: 1KwW
- Plug: Ø3.5mm (5/32")
- Microphone: condenser
- For use with Internet



HD-180MCP

HEADPHONE MICROPHONE
COMPUTER SET - IVORY

- Speaker type: Ø30mm dynamic
- Frequency response: 20-180kHz
- Impedance: 32 ohms
- Sensitivity: 101dB



HD-300VBK

HEADPHONE MICROPHONE
COMPUTER SET - BLACK

- Speaker type: Ø40mm dynamic
- Frequency response: 20-20kHz
- Impedance: 32 ohms
- Sensitivity: 115dB



VIDEO & AUDIO ACCESSORIES

HEADPHONES



- Max. input power: 100mW
- Cord length: 2.7M
- Plug: Ø6.3mm (1/4") gold adapter
- Digital



Full ear style

CD-3500

DELUXE HI-FI HEADPHONES

- Speaker type: Ø40mm anisotropic
- Frequency response: 20-20kHz
- Impedance: 32 ohms
- Sensitivity: 105dB



HP-150

DELUXE HI-FI HEADPHONES

- Speaker: 40mm
- Driver unit: 15mm mylar speaker
- Frequency response: 20-20KHz
- Impedance: 32 ohms
- Sensitivity: 100dB
- Max input power: 1000mW
- Plug: 6.3mm



HP-150V

DELUXE HI-FI HEADPHONES

- Speaker: 40mm
- Driver unit: 15mm mylar speaker
- Frequency response: 20-20KHz
- Impedance: 32 ohms
- Sensitivity: 105dB
- Max input power: 1000mW
- Plug: 6.3mm



VIDEO & AUDIO ACCESSORIES

HEADPHONES



HDJ-5000

FOLDABLE DIGITAL HEADPHONES

- Speaker: 50mm
- Frequency response: 20-20KHz
- Impedance: 37 ohms
- Sensitivity: 96dB
- Max input power: 3000mW
- Cord length: 1.5M



HPI-357

FOLDABLE DIGITAL HEADPHONES

- Speaker: 40mm super bass neodymium speaker
- Frequency response: 20-20KHz
- Impedance: 32 ohms
- Sensitivity: 112dB
- Max input power: 100mV
- Input connection: 3.5mm gold
- Cord length: 1.2M
- Black



HPI-367

HEADPHONE FOLDABLE AND SWIVEL

- Speaker: 40mm super bass neodymium speaker
- Frequency response: 20-20KHz
- Impedance: 32 ohms
- Sensitivity: 115dB
- Max input power: 100mV
- Input connection: 3.5mm gold
- Cord length: 1.2M



VIDEO & AUDIO ACCESSORIES

TV BRACKETS



MT-209SL

PANEL LENGTH 30"~42" TV


- Maximum TV weight:
75 Kgs – 165 lbs
- Color: Black
- Anti-theft and Anti-tamper
Lock positions
- Level Gauge built in for easy
one step install
- Tilt



MT-209ML

PANEL LENGTH 37"~52" TV

- Maximum TV weight:
75 Kgs – 165 lbs
- Color: Black
- Anti-theft and Anti-tamper
Lock positions
- Level Gauge built in for easy
one step install
- Tilt

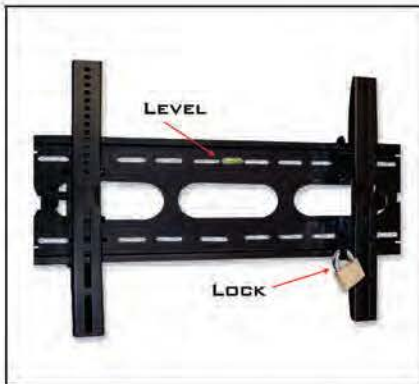

MT-209XL

PANEL LENGTH 42"~63" TV

- Maximum TV weight:
75 Kgs – 165 lbs
- Color: Black
- Anti-theft and Anti-tamper
Lock positions
- Level Gauge built in for easy
one step install
- Tilt



MSF-3270

TV LCD/LED Bracket

- Fixed LCD/LED wall mount
- Vertical inclination adjustable: +/-15°
- Maximum TV weight: 50Kgs (110lbs)
- Color: Black
- Width adjustable to hold TV's from 32" to 70"
- Solid, heavy gauge steel construction
- Tilt left/right
- Easy to install

VIDEO & AUDIO ACCESSORIES

TV BRACKETS



MSF-1437

LCD/PLASMA BRACKET

- For flat panel televisions (14"-37")
- Solid, heavy gauge steel construction
- Support up to 35 Kgs
- Easy to install
- Mounting hardware included
- Non tilt

14"-37"

For TV




MSF-2242

LCD/PLASMA BRACKET

- For flat panel televisions (22"- 42")
- Solid, heavy gauge steel construction
- Support up to 50 Kgs
- Easy to install
- Mounting hardware included
- Non tilt

22"-42"

For TV

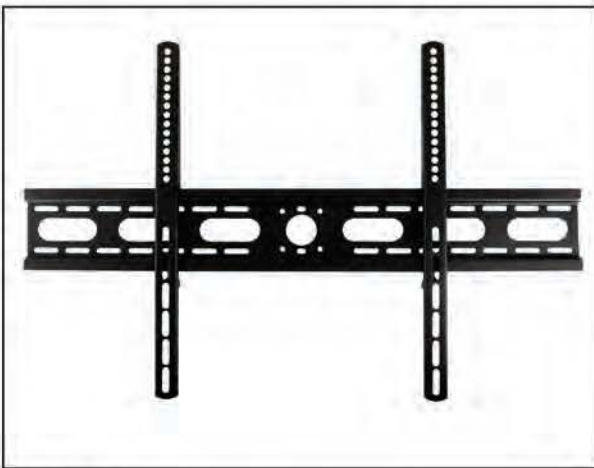


MSF-3655

FIXED LCD/PLASMA MOUNT

- For flat panel televisions (36"- 55")
- Solid, heavy gauge steel construction
- Support up to 75 Kgs
- Easy to install
- Mounting hardware included
- Non tilt

36"-55"

For TV

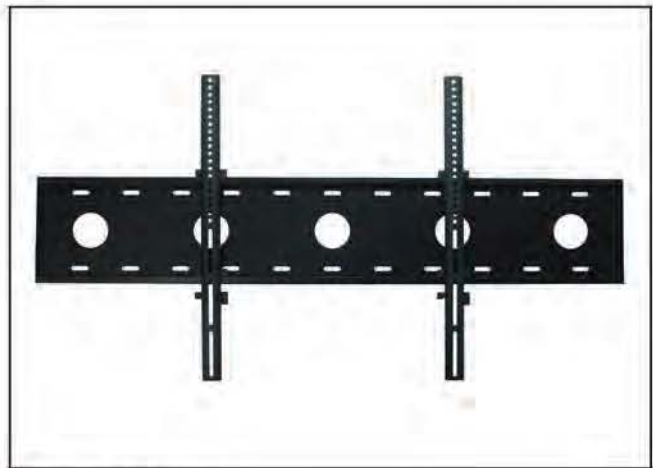

MSF-6580

LCD/PLASMA BRACKET


- For flat panel televisions (65"- 80")
- Solid, heavy gauge steel construction
- Support up to 100 Kgs
- Easy to install
- Mounting hardware included
- Non tilt

65"-80"

For TV

VIDEO & AUDIO ACCESSORIES

TV BRACKETS

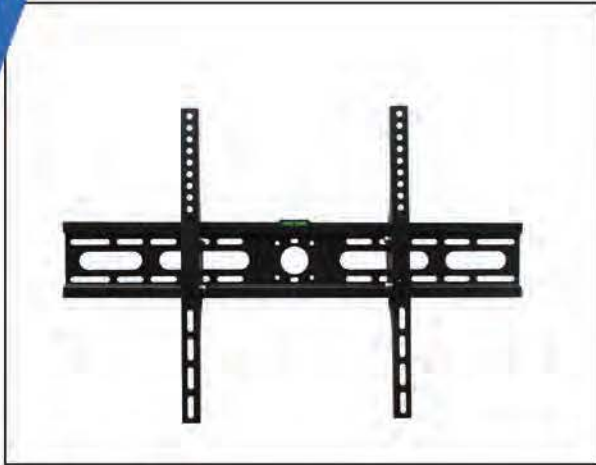

MT-2070

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Width adjustable to hold TV's from 20" to 70"
- Maximum TV weight: 60Kgs (132 lbs)
- Low profile design, only 2.36" (60mm) against wall
- Mounting holes up to 24.40" (620mm) x 16.14"(410mm)
- Free bubble level system
- Color: Black
- Easy to install
- Solid, heavy gauge steel construction



MFLR-3770

PUBLIC MOBILE TV CART

- Fixed LCD/Plasma mount
- Width Adjustable to hold TV's from 37" to 70"
- With four Wheels
- Supports up to 40Kg (88Lbs)
- Easy to install
- Mounting Hardware included
- Color: Black



MA-3070

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Width adjustable to hold TV's from 30" to 70"
- Pan: 180°
- Tilt: -10° down
- Profile: 2.8"-14" (70mm-355mm)
- Max Pattern: 31.6" x 21" (802 x 534mm)
- Solid, heavy gauge steel construction
- Supports up to 90Kgs (198.4 lbs)
- Color: Black
- Easy to install
- Mounting Hardware included



MA-3063

TV LCD/LED BRACKET

- Fixed LCD/Plasma Mount
- Width Adjustable to hold TV's from 30" to 60"
- Solid, heavy gauge steel construction
- Color: Black
- Easy to install
- Adjustable width between 110 and 450cm
- Vertical inclination adjustable +/- 10°
- Maximum TV weight: 60Kgs (132lbs)

VIDEO & AUDIO ACCESSORIES

TV BRACKETS



MCM-4275

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Width adjustable to hold TV's from 42"-75"
- Pan: 360°
- Tilt: ±15° up and down
- Max Pattern: 31.5" x 19.7" (800x500mm)
- Variable drop-pole: up to 80cm (31.5") of Adjustment
- Solid, heavy gauge cold rolling steel construction
- Supports up to 65Kgs (143lbs)
- Color: black
- Easy to install Mounting Hardware included



MAE-1323AR

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Width adjustable to hold TVs from 13"-23"
- Pan: 360 Degrees
- Supports up to 20Kgs
- Color: Black
- Easy to install Mounting Hardware included



MSE-2342F

TV LCD/LED BRACKET


- Fixed LCD/LED wall mount
- Maximum TV weight: 30Kgs (66 lbs)
- Mounting profile: 27mm
- Width adjustable to hold TV's from 23" to 42"
- VESA Standard: 75x75, 100x100, 200x200
- Easy to install



MSE-3255F

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Maximum TV weight: 40Kgs (88lbs)
- Mounting profile: 27mm
- Width adjustable to hold TV's from 32" to 55"
- VESA Standard: 75x75, 100x100, 200x200
- Easy to install



VIDEO & AUDIO ACCESSORIES

TV BRACKETS



MSE-2355DRT

TV WALL BRACKET

- Width adjustable to hold TV from 23"~55"
- Maximum TV Weight: 30Kgs (66 lbs)
- Pan: $\pm 90^\circ$
- Tilt: $\pm 20^\circ$
- Profile: 88mm~398mm (3.5"~15.7")
- Cable Management, rotatable Mount
- Color: black



MSE-2355SART

TV WALL BRACKET

- Width adjustable to hold TV from 23"~55"
- Maximum TV Weight: 30Kgs (66 lbs)
- Pan: $\pm 45^\circ$
- Tilt: $\pm 20^\circ$
- Profile: 88mm~201mm (3.5"~7.9")
- Cable Management, rotatable Mount
- Color: black



MSE-1323AR

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Maximum TV weight: 20Kgs (44lbs)
- Width adjustable to hold TV's from 13" to 23"
- Max VESA 100x100
- Aluminum
- 360° swivel
- Mounting profile: 85-240mm
- Easy to install



MRE-1343RT

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Maximum TV weight: 20Kgs (44lbs)
- Width adjustable to hold TV's from 13" to 43"
- VESA Standard: 75x75, 100x100, 200x200
- +5°~-12° tilt, +90°~-90° swivel, +3°~-3° level adjustment
- Mounting profile: 60~190mm
- Easy to install

VIDEO & AUDIO ACCESSORIES


TV BRACKETS



MTE-2342T

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Maximum TV weight: 30Kgs (66lbs)
- Mounting profile: 53mm
- 12°~ -12° Tilting
- Width adjustable to hold TV's from 23" to 42"
- VESA Standard: 75x75, 100x100, 200x200
- Easy to install

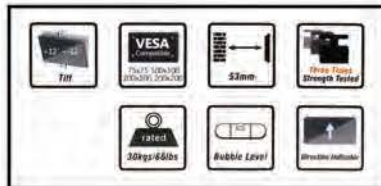

MTE-2555CR

TV LCD/LED CORNER MOUNT


- Articulated LED/LCD TV wall mount
- For flat panel televisions (25"-55")
- Supports up to 66lbs (30Kg)
- Solid, heavy gauge steel construction
- Level Gauge built-in for easy one step install, level indicator shown in the picture
- Up-down inclination adjustable: ±15°
- Swivels from left/right to right/left for viewing from horizontal 120°
- Hinged arm extends TV 110mm to 485mm of wall
- Color: Black



MTE-3255T

TV LCD/LED BRACKET

- Fixed LCD/LED wall mount
- Maximum TV weight: 40Kgs (88lbs)
- Mounting profile: 53mm
- 12°~ -12° Tilting
- Width adjustable to hold TV's from 32" to 55"
- VESA Standard: 200x200, 400x200, 300x300, 400x400
- Easy to install

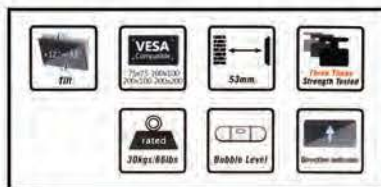

MTE-3625DVD

UNIVERSAL DVD WALL MOUNT

- Fixed universal DVD wall mount
- Tempered black Glass Shelf
- Glass Dimensions: 14.2" x 9.8" x 0.2" (360x250x5mm)
- Supports up to 17.6Lbs (8 Kgs)
- Cable Board for hiding wires
- Assembly Guide included

VIDEO & AUDIO ACCESSORIES

UNIVERSAL REMOTE CONTROLS



RCN-503

TV REMOTE CONTROL 3 WAY

- Consolidates up to 3 remotes
- Compatible with today's most popular brands of TV, satellite, VCD & DVD



RCN-504

TV REMOTE CONTROL 4 WAY

- Consolidates up to 4 remotes
- Compatible with today's most popular brands of TV, satellite, VCD & DVD



RCN-506

TV REMOTE CONTROL 6 WAY

- Consolidates up to 6 remotes
- Compatible with today's most popular brands of TV, satellite, VCD & DVD



RCN-906

BIG REMOTE CONTROL 6 WAY

- Consolidates up to 6 A/V devices
- Compatible with today's most popular brands of TV, satellite, VCD & DVD
- Replace all your existing remote controls
- Requires 2 AA batteries
- Easy viewing & navigation



ZNA-110BL

UNIVERSAL REMOTE

- TV only
- Advanced DVD and satellite functions
- Sleep timer, closed caption
- Input source selector
- Blister retail packing
- Available in bulk
- Poly bag packing



ZNA-410BL

UNIVERSAL REMOTE CONTROL 4 WAY IN 1 BLIST

- Advanced DVD and satellite functions
- Sleep timer
- Closed caption
- Input source selector
- 4 Device: TV, VCR, DVD & CBL



ZNA-110

- Available in Bulk
- Poly bag packing

VIDEO & AUDIO ACCESSORIES

VIDEO ACCESSORIES



KF-220

- Switchable FM Trap
- Cable amplifier
- 24dB Gain



KF-235

- Gain Control
- FM Trap/ 24DB Cable Amplifier



MTV-196

- Gain Control
- Low Noise
- High Output Power
- 2 Way Output
- 54-550MHz
- 30dB Gain



NB-810 (110V)

- 4 Way amplifier
- 10dB Gain
- 50-400MHz Bandwidth



GTS-069

- Video Selector Switch
- 75 Ohm
- Coaxial
- 3 Inputs
- 1 Output



GTS-069-30

- Connects DVD or VCR Output to up to 4 VCR's or Monitors
- 10Hz to 10MHz

VIDEO & AUDIO ACCESSORIES

VIDEO ACCESSORIES



GTS-069-32

AV DISTRIBUTION AMPLIFIER (1in)

- Consolidates up to 3 remotes
- Compatible today's most popular Brands of TV, Cable, Satellite, VCD & DVD



GTS-090-8

- Converts A/V RCA Signal to "F" Type Coaxial 75 Ohm Signal
- RF Modulator
- Converts "RCA" type output to "F" type output, to be used for TV's without "RCA" type inputs.



GTS-090-10

VERTICAL OR HORIZONTAL DESIGN WITH REMOVABLE BASE

- Auto selection for A/V or antenna inputs
- RF Modulator
- Converts "RCA" type output to "F" type output, to be used for TV's without "RCA" type inputs.



HD-ATSC-3

HDTV DIGITAL CONVERTER

- Fully ATSC Compliant for North America with NTIA cert
- USA ATSC 8VSB/64/256 QAM digital broadcast HD receiver
- RF Output: RF 3/4CH and and loop through function
- Demodulation: 8VSB/64QAM/256QAM
- Converts digital broadcast to your analog TV
- Analog Pass through
- EPG (Electronics Program Guide) and program information
- Auto tuning (find all digital broadcasts)



BL-HD3-MIMAD

MHL HDTV SMART ADAPTER

- Connect your MHL-Enabled phone to your high definition TV or Computer Monitor
- Requires standard HDMI Cable and Micro USB Charging Cable
- Simply add plug between MHL Adapter and your device as shown
- 5-pin to 11pin Adapter plug allows you to use your MHL Smart Adapter with the latest Galaxy and MHL compatible devices



CC-VB-AUDPTZ

CCTV RJ45 CAT5 CABLE VIDEO + POWER BALUN

- BNC HD PASSIVE TRANSCEIVER PAIR
- Transmits video, audio and power signals over a single UTP cable
- Video transmission distance: 1300 feet
- Audio & power transmission distance: 328 feet
- BNC connector for video, RCA for Audio and 2.1 DC for power
- Compact size for easy installation

VIDEO & AUDIO ACCESSORIES

VIDEO ACCESSORIES



GTS-090-20

AUTO TV SWITCH AV > RF

- RF modulator
- Automatically switch from AV device to home TV when AV device system is turned On.
- Shielded coaxial cables for a clear picture, free from outside signal interference.



GTS-1003

PAL TO NTSC CONVERTER,

- AV Input & Output, Converter Allows Conversion PAL Inputs NTSC 3.58 Output Signal



NAB-80

HIGH END

- 75 Ohm
- Coaxial
- 2 Inputs
- 1 Output



AB-25

TWO 75F FEMALE INPUTS

- One 75F Female Output
- 5-220MHz
- 80dB Isolation
- 5-860MHz 1 dB Insertion Los



AB-40

PUSH BUTTON SWITCH

- 2-Way
- High Isolation Die Cast Housing
- 75 Ohms



ABC-45

PUSH BUTTON SWITCH

- 3-Way
- High Isolation Die Cast Housing
- 75 Ohms



N64-100

AUDIO/VIDEO CABLE.

- For Nintendo 64



PSX-300

AUDIO/VIDEO CABLE.

- For Playstation



GTS-061

3 WAY SELECTOR,

- Triple RCA Jack
- 3 Audio/Video Inputs
- RF Interference Reduction.

VIDEO & AUDIO ACCESSORIES

VHF/UHF ACCESSORIES

W-6000

VHF/UHF COLOR TV BOOSTER


- High Power: 135dB
- Dual Impedence: 75Ohm
- Dual Voltage Input: AC 110V/220V Switchable
- Power consumption: 5.5 Watts Max.
- Outdoor antenna booster



W-7000

VHF/UHF COLOR TV ANTENNA BOOSTER

- High Power: 135dB
- Gain Control: 0-10dB Variable
- Dual Impedence: 75Ohm, F Connector
- Dual Voltage Input: AC 110V/220V Switchable
- Power consumption: 5.5 Watts Max.
- Outdoor antenna booster

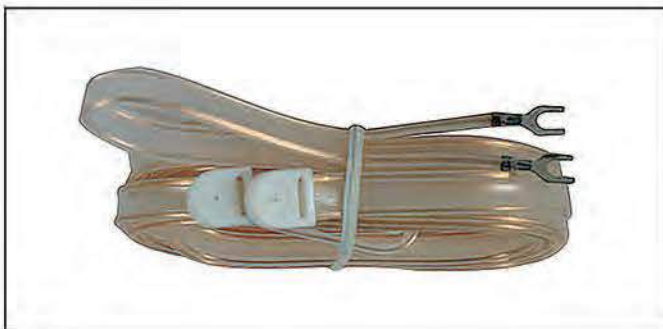

F-90

- FM Dipole Indoor Antenna

F-21A (3 section)

- 11" Knocked down and 30" extended

F-21B (4 section)

- 8" Knocked down and 24" extended

F-21C (4 section)

- 11" Knocked down and 37" extended



VIDEO & AUDIO ACCESSORIES

ANTENNAS

F-29

ANTENNA

- Universal Rabbit Ear Design
- Dual
- 10" collapsed
- 31" extended
- Nickel finish



F-29S

ANTENNA

- Universal Rabbit Ear Design
- Dual
- 10" collapsed
- 31" extended
- "F" push on



F-29A

ANTENNA

- Universal Rabbit Ear Design
- Dual
- 10" collapsed
- 31" extended
- "F" push on



F-32

ANTENNA

- VHF/UHF
- Dual
- 10" collapsed
- 31" extended



F-32N

ANTENNA

- VHF/UHF
- Dual
- 10" collapsed
- 31" extended



F-33N

ANTENNA

- VHF/UHF
- Dual
- 10" collapsed
- 31" extended



VIDEO & AUDIO ACCESSORIES

ANTENNAS



F-33N81
 UNIVERSAL RABBIT
 EAR DESIGN / VHF / UHF

- Dual
- 10" Collapsed
- 31" Extended
- Nikel finish
- "F" type female mounted on base



F-33A
 UNIVERSAL RABBIT EAR DESIGN

- Dual
- 10" Collapsed
- 31" Extended
- Nikel finish
- "F" push on N-223 type cable



KF-1309-HD
 HDTV INDOOR ANTENNA

- Innovative flat, paper-thin antenna design
- High gain/low noise digital TV signal reception
- Multi-directional signal reception
- Easy installation, no tools and no assembly required



ST-802
 VHF/UHF/FM INDOOR ANTENNA

- 6 Position Picture Switch
- 4 Section
- 32" Extended



KF-7000HD
 AMPLIFIED INDOOR TV ANTENNA

- Improves VHF/UHF/FM reception
- LED power on indicator
- UHF loop tilts 180 degrees and rotates 360 degrees
- On/Off amplifier knob with variable signal gain control
- Adjustable/Retractable VHF dipoles includes AC/DC adaptor



KF-3002HD
 INDOOR HDTV ANTENNA AMPLIFIED

- Low Noise & High Gain
- Adjustable Linear Gain Control
- Super Efficient Noise Reduction Circuitry
- Highly Sensitive VHF Elements & High Gain UHF Elements
- Tilt Adjustment
- LED Power Indicator


VIDEO & AUDIO ACCESSORIES

ANTENNAS

UVV633

VHF/UHF ANTENNA


- Channels: 2-69, 4-7dB VHF Gain, 3-5dB UHF Gain
- 75/300 Ohm
- 12 Elements

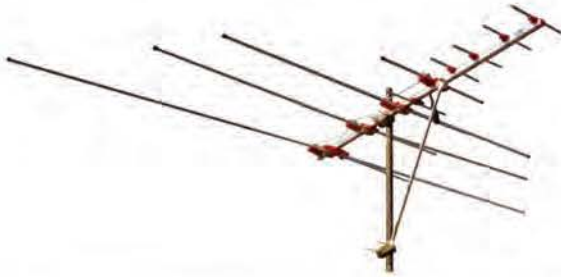

UVV1342

VHF/UHF ANTENNA


- Channels: 2-69, 7-11dB VHF Gain, 6-9dB UHF Gain
- 75/300 Ohm
- 19 Elements

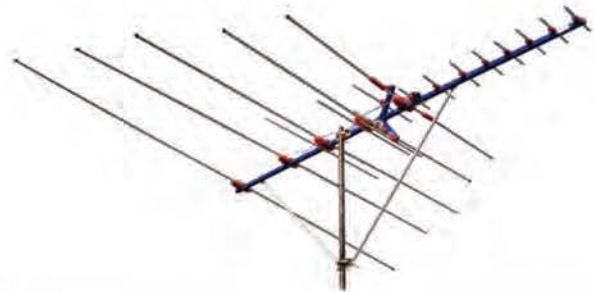

UVV922

VHF/UHF ANTENNA

- Channels: 2-69, 4-7dB VHF Gain, 3-5dB UHF Gain
- 75/300 Ohm
- 15 Elements

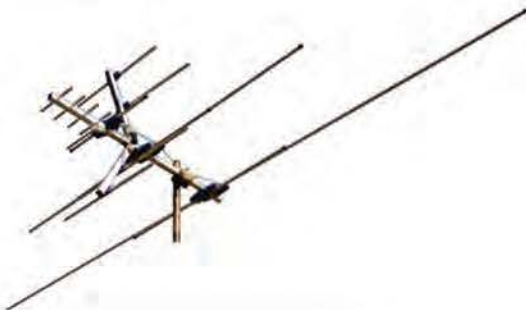

UVV933

VHF/UHF ANTENNA

- Channels 2-69, 8-14dB VHF Gain, 3-5dB UHF Gain
- 75/300 Ohm
- 15 Elements



43UX

UHF ANTENNA

- Channels: 21 to 69
- 75/300 Ohm
- 43 Elements



U-W19

HIGH DEFINITION SIGNAL ANTENNA

- Terrestrial HDTV - Broadcast Compatible
- Reception channel 13-62
- Impedance 75 Ohms



U-W25

HIGH DEFINITION SIGNAL ANTENNA

- Terrestrial HDTV - Broadcast Compatible
- Reception channel 13-62
- Impedance 75 Ohms



VIDEO & AUDIO ACCESSORIES

ANTENNAS



WM-4
ANTENNA WALL MOUNT
• 4"



WM-6
ANTENNA WALL MOUNT
• 8"

WM-19

DIGITAL ANTENNA J-POLE MOUNT

- 180° Adjustability
- Color: black
- Pipe Diameter: Φ 1" (25mm)
- Pipe Thickness: 0.06" (1.5mm)
- Net Weight: 1Kg (2.2lbs)



STA-150C
VHF/UHF/FM ANTENNA
• With Booster



MST-516
ANTENNA MAST
• 5', 16 Gauge

TRI-3137
ANTENNA TRIPOD



WV-870

TV REMOTE CONTROLLED ROTATABLE ANTENNA

- Infrared remote control for long distance reception and anti-interference
- Receives VHF-UHF channels
- Rotation: Max 360°
- Frequency: 45-910 MHz
- VHF Gain: 18dB
- UHF Gain: 28dB
- Standard wave: <4
- Impedance: 75 Ω
- Power: 3W
- Working voltage: 110V/60Hz
- Rotation speed: 4r/m
- Built-in low noise circuit
- Built-in high gain booster



VIDEO & AUDIO ACCESSORIES

VIDEO ACCESSORIES

N-375

COAXIAL CABLE WALL PLATE WITH SINGLE CONNECTOR

- 300-75 Ohm
- Aluminum



N-380

TV ANTENNA PLUG / CONNECTOR

- 300-75 Ohm



N-919

OUTDOOR VHF/UHF TRANSFORMER

- Weather Resistant with Rubber Boot & Spade Terminals



N-919A

OUTDOOR VHF/UHF TRANSFORMER

- Weather Resistant with Rubber Boot



N-267

INTERIOR VHF/UHF TRANSFORMER


- 75 Ohm Input
- Twin Lead
- 300 Ohm Output



NB-420

8 WAY SPLITTER

- 5~1,000MHz
- Zinc
- Die Cast with Screws
- 8 Way Splitter

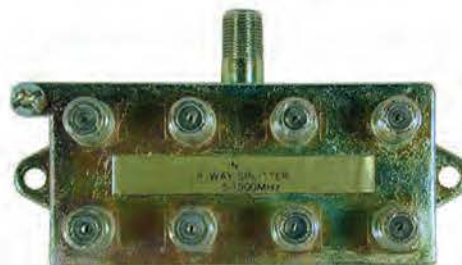

VIDEO & AUDIO ACCESSORIES

SPLITTERS

N-1000 (zinc)

N-1000G (gold)

SPLITTER

- 2 Way
- 5-1,000MHz 75 Ohm CATV signal "F" splitter
- 75Ohm input, 75 Ohm UHF/VHF Output



N-1001 (zinc)

N-1001G (gold)

SPLITTER

- Mini 2 Way
- 5-1,000MHz 75 Ohm CATV signal "F" splitter
- 75Ohm input, 75 Ohm UHF/VHF Output



N-1003 (zinc)

N-1003G (gold)

SPLITTER

- 3 Way
- 5-1,000MHz with screws
- 75Ohm input, 75 Ohm UHF/VHF Output



N-1004

SPLITTER

- 4 Way
- 0-1,000MHz
- 75Ohm input, 75 Ohm UHF/VHF Output
- Metal with screws



N-1005 (zinc)

N-1005G (gold)

SPLITTER

- 4 Way
- 5-1,000MHz
- With screws
- Gold



KL-812A

2-WAY SPLITTER

- 5 - 2,400 MHz
- Power pass to all ports
- Silver



KL-813A

3-WAY SPLITTER

- 5 - 2,400 MHz
- Power pass to all ports
- Silver



KL-814A

4-WAY SPLITTER

- 5 - 2,400 MHz
- Power pass to all ports
- Silver



VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS



F-56

- TWIST-ON CONNECTOR**
- with separated ferule for RG-6



F-56AL

- Connector for RG-6 with Attached Ferule



F-56ALW

- Connector for RG-6 with Attached Ferule
- Wide grip



F-59

- TWIST-ON CONNECTOR**
- with separated ferule for RG-59



F-59AL

- Connector for RG-59 with Attached Ferule



F-71B

- Twist-on Male to Male "F" Adapter



NF-3

- Female to RCA Female to "F" Adapter



NF-4

- Female to RCA Male to "F" Adapter



NF-18

- Twist-on Angled Male to "F" to Female Adapter



NF-35

- Male to RCA Female to "F" Adapter

NF-56

NF-56G (gold)

- Twist-on Connector for RG-6
- Twist on Connector for RG-59

NF-6

NF-6G (gold)



NF-104

- Female to 35mm male Adapter



VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS

F-59CMP BL (blue)

F-59CMP BK (black)

F-59CMP RD (red)

F-59CMP-GR (green)

- F Type Compression Connector for RG-59 Cable



F-56CMP BL (blue)

F-56CMP BK (black)

F-56CMP RD (red)

F-56CMP GR (green)

- F Type Compression Connector for RG-6 Cable

F-56SO

- RG-6 Connector with Sealant and O-Ring



F-56CP

- F connector copper



F-11

- For RG-11U with Separate 1/8" Ferrule



F-61

- Universal Chassis Connector with Nut & Washer



F-81 / F-81G (Gold)

- Female Splice Connector with Nut & Washer
- Available in Gold



F-82

- 3 Way "F" Type Adapter
- 2 Females & 1 Male



F-83

- Female RCA Chassis Connector for Coaxial Cable with Teflon



F-85

- 3 Way "F" Type Adapter
- 3 Females



F-87

- 4 Way "F" Type Adapter
- 4 Females



NF-81

- NF-81G (gold)
- Female Splice Connector for Coaxial Cable

VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS



WB-1

- Weather Boot



F-62

- Female Chassis Mount
- UHF Connectors



NF-12

- Double Female Adapter
- UHF



NF-48

- Male
- Crimp Type
- For RG-58
- UHF



NF-72

- "F" Female to Male
- UHF



PL-258

- Coaxial Plug Reduced for RG-58
- UHF

PL-259

- Coaxial Plug
- UHF



PL-259D

- Deluxe Silver Plated Coaxial Plug with Heat Resistant Gold Tip & White Teflon Core



VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS

UG-175 (RG-58)

UG-176 (RG-59)

- Coaxial Adapter for PL-259



MU-23

- 3 Piece Crimp Plug for RG-58



NF-54

- 3 Piece Male Solder
- For RG-58
- BNC Connectors



NF-5

- 3 Piece Male Solder
- For RG-58
- BNC Connectors



NF-52

- Female to "F" Male
- BNC Connectors



NF-2

- Male to "F" Female
- BNC Connectors



NF-58

- 3 Piece Male Crimp
- For RG-58
- BNC Connectors



NF-59

- 3 Piece Male Crimp
- For RG-59
- BNC Connectors



NF-32 (for RG-6)

NF-33 (for RG-59)

- Twist-on Male
- BNC Connectors



NF-34

- Twist-on Male
- For RG-58
- BNC Connectors

VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS

NF-32CMP BK (black)

NF-32CMP BL (blue)

NF-32CMP RD (red)

- Twist-on Male
- BNC Type Compression Connector for RG-6 Cable

NF-33CMP BK (black)

NF-33CMP BL (blue)

NF-33CMP RD (red)

- Twist-on Male
- F Type Compression Connector for RG-59 Cable

NF-34CMP BL (blue)

NF-34CMP RD (red)

- Twist-on Male
- F Type Compression Connector for RG-58 Cable



NF-19

- Double Female Adapter
- BNC Connectors



NF-20

- Female Chassis Connector
- BNC Connectors



NF-33

- Female to "F" Female
- BNC Connectors



NF-75

- Double male Adapter
- BNC Connectors

VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS



NF-1

- Push-on Male to Female Adapter
- Push on F male to F female adaptor



NF-6 (gold)

- Twist-on Connector for RG-59



NF-7

- Push-on Connector for RG-59



NF-8

- Male to RCA Female
- BNC Connectors



NF-14

- Male to Double Female "T" Connector
- BNC Connectors



NF-16

- Female to RCA Male
- BNC Connectors



NF-66

- 3 Piece Male Crimp Plug for RG-6
- BNC Connectors



NF-69

- For RG-11U with Separate 1/5" Ferrule



NF-73

- 3 Female "T" Adapter
- BNC Connectors



NF-74

- 3 Male "T" Adapter
- BNC Connectors



NF-76

- Female to UHF male
- BNC Connectors



NF-78

- Double Female Chassis Mount
- BNC Connectors

VIDEO & AUDIO ACCESSORIES

CONNECTORS / ADAPTERS



PAL-380

- 9.5mm Right Angle Plug
- Solderless
- Plastic Cover
- Screw Terminals



PAL-911

- PAL Male to "F" Female



J-236 (2.1 TO 5.5mm)

J-238 (2.5 TO 5.5mm)

- DC Power Jack



GM-101 (mono)

- 1/4" Shielded Right Angle Plug



P-100T (mono)

P-102T (stereo)

- 1/4" Plug



P-101T

P-101TG (gold)

- 1/4" Mono Plug
- Metal Body



P-103T

P-103TG (gold)

- 1/4" Stereo Plug
- Metal Body



P-104T (mono)

P-105T (stereo)

- 3.5mm Plug

VIDEO & AUDIO ACCESSORIES

PLUGS / JACKS



P-193

- 1/4" Female
- Stereo



P-194

- 1/4" Female to 1/4" Male
- Mono to Mono



P-195

- 1/4" Female Stereo
- Silver
- Chassis Mount

P-225

- 1/4" Mono Plug to Stereo Jack



P-226

- 1/4" Mono Plug to Subminiature Mono Jack



P-229

- Subminiature Plug to 1/4" Stereo Jack

VIDEO & AUDIO ACCESSORIES

PLUGS / JACKS



P-106M (mono)
P-106S (stereo)
P-106S-G (stereo - gold)
• 3.5mm stereo plug



P-108
• 1/4" Mono Plug to
Subminiature Mono Jack



P-109 (stereo to mono)
P-114 (mono to stereo)
• 3.5mm stereo plug 1/4" jack



P-110
P-110G (gold)
• 3.5mm stereo plug 1/4" jack



P-111 (stereo)
P-112 (mono)
• 1/4" plug 3.5mm jack



P-117 (3.5mm mono)
P-117S (3.5mm stereo)
P-118 (1/4" mono)
P-118S (1/4" stereo)
• In-line jack

P-180 BLUE
P-180 RED
• Professional 1/4" color coded



P-181 BLACK
P-181 BLUE
P-181 RED
• Professional 1/4" color coded
• All color have gold tip



PY-243ST
• "Y" Adapter for RCA plug 1/4" stereo



VIDEO & AUDIO ACCESSORIES

PLUGS / JACKS



P-217

- RCA Plug to 3.5mm
RCA Jack



P-230 (mono to stereo)

P-231 (mono to mono)

- 3.5mm plug to 1/4" jack

P-234 (3.8 x 1mm)

P-235 (3.45 x 1.3mm)

P-236 (5.5 x 2.1mm)

P-237 (5 x 5 x 2.1mm)

P-238 (5 x 5 x 2.5mm)

P-239 (5.5 x 2.9mm)

P-240 (4.35 x 3.3mm)

- DC power plug



P-246

- 1/4" Stereo Plug to 3.5mm
Stereo Double Jack



P-248 (mono)

P-249 (stereo)

- 1/4" Plug to Double 1/4"
Jacks



P-250

- 3.5mm Stereo Plug to 3.5mm
Stereo Double Jack

VIDEO & AUDIO ACCESSORIES

PLUGS / JACKS



P-221

- RCA Plug to Double RCA Jack



P-221G

- RCA Plug to Double RCA Jack
- Gold Tips



P-222

- 1/4" Mono Plug to RCA Jack



P-222C

- 1/4" to RCA Jack Adaptor



P-223

- 3.5mm Mono Plug to RCA Jack



P-224

- Subminiature Mono Plug to RCA Jack



P-227 (mono)

P-228 (stereo)

- 3.5 mm FEMALE TO RCA MALE



P-113

- RCA Female to Double RCA Male



P-115 BLACK

P-115 RED

- RCA Plug



P-116 BLACK

P-116 RED

- RCA jack



P-119 / P-119G

- Molded Adapter
- RCA jack to RCA jack



P-119G

- Molded Adapter
- RCA Jack to RCA Jack
- Gold ends

VIDEO & AUDIO ACCESSORIES

RCA



P-120G

RCA plug to RCA plug
• Gold & Black finish



P-125B

RCA PLUG WITH TAIL
• Black color



P-125R

MONO RCA PLUG WITH TAIL
• Red color



P-126B

P-126R
• RCA jack



P-127

P-127G (gold)
• RCA plug metal type



P-192

• 2 RCA Jack to 2 RCA Jack



P-242

• 3.5mm Stereo Plug to RCA Jack



P-243 (stereo)

P-247 (mono)
• 1/4" Plug to Double RCA jack



P-244

• 3.5mm Stereo Plug to RCA Double Jack

P-275

2 RCA TO RCA COUPLER WITH S VIDEO COUPLER
• Plastic Handle



P-276

3 RCA TO 3 RCA COUPLER
• Plastic Handle



VIDEO & AUDIO ACCESSORIES

RCA / DIN



P-245

- 3.5mm Mono Plug to Double RCA jack



P-253

- RCA Plug to 3.5mm Mono Double Jack



P-255

- RCA Jack to 1/4" Mono Double Jack



P-257

- RCA Plug to 1/4" Mono Double Jack



Q-119

- Jack to Jack
- RCA Coupler
- Gold



Q-120

- Plug to Plug
- RCA Coupler
- Gold



Q-121

- Right Angle Plug to Jack
- RCA Coupler
- Gold



DIN-J6

- 6 Pin Jack



DIN-P5

- 5 Pin Plug



DIN-P8

- 8 Pin Plug

VIDEO & AUDIO ACCESSORIES

ACCESSORIES



LP-M

- Mono
- L Pads
- 8 Ohms



CC-5 (for RG-59)

CC-6 (for RG-6)

- Nylon Clip



NB-317 (mono)

- 1/4" Jack
- (2P-8P)



NB-403

- 1/4" Mono Jack
- Open Circuit



NB-404

- 1/4" Mono Jack
- Closed Circuit



NB-405

- 1/4" Stereo Jack
- Closed Circuit



NB-406

- 1/4" Stereo Jack
- Open Circuit



NB-407

- 1/4" Jack, 3 Conductor
- Closed Circuit



NB-408

- 1/4" Jack, 3 Conductor
- Open Circuit



NB-411BLACK (gold)

NB-411RED (gold)

- RCA Chassis Mount


TG-300R-1235G

- DVD Motor
- CW
- ≤ 105 mA
- 2900 ± 105 rpm




VIDEO & AUDIO ACCESSORIES

ACCESSORIES

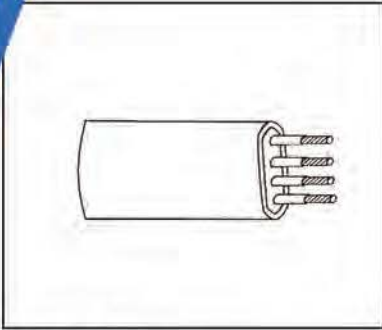


KR-220 (ivory)

- 4 Conductors
- Flat Type
- Color Coded
- 20 GA
- 1000' Spool

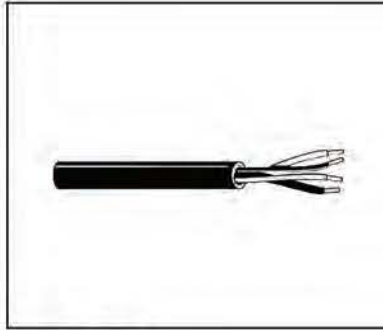


KR-502

- 2 Pairs
- Round Type
- Color Coded
- 1000'

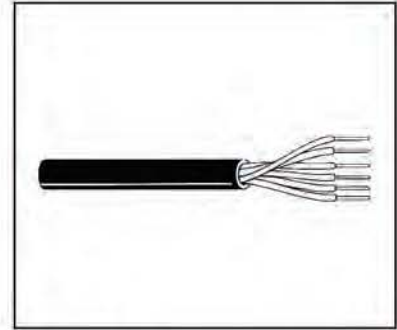


KR-503

- 3 Pairs
- Round Type
- Color Coded
- 1000'

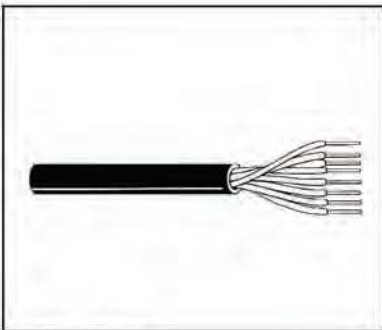


KR-504

- 4 Pairs
- Round Type
- Color Coded
- 1000'

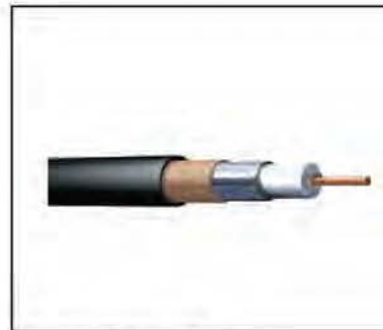

RG-6 BLACK RG-6 WHITE

- Coaxial cable 1000'

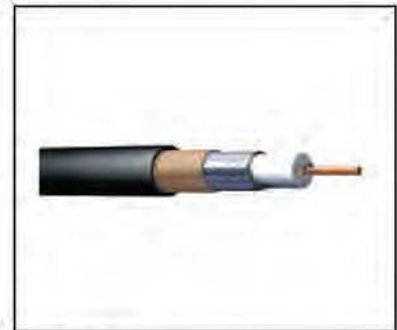

RG-58 (copper braid) RG-59 BLACK RG-59 WHITE

- Coaxial cable 1000'



RG-6AL (aluminum braid) RG-6DK (aluminum braid & coil) RG-59AL (aluminum braid)

USA Standard Coaxial Cable

- 1000 feet
- White
- Aluminum braid and coil




CPW-100M

- Power cable
- 328 Ft (100m)
- 14/16 gauge

VIDEO & AUDIO ACCESSORIES

SPEAKER CABLES

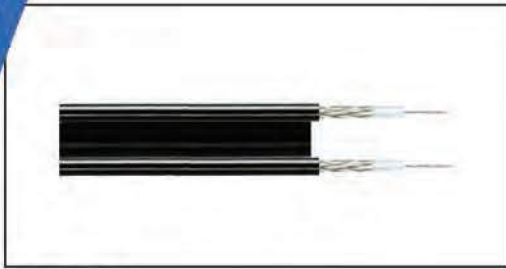

N-320

FLAT TWIN FOAM LEAD

- 300 Ohm
- 1000'



CABLE#10	Clear 25'	10 Gauge Clear
CABLE#10	Clear 50'	10 Gauge Clear
CABLE#10	Clear 100'	10 Gauge Clear
CABLE#10	Black 100'	10 Gauge Black
CABLE#12	Clear 25'	12 Gauge Clear
CABLE#12	Clear 50'	12 Gauge Clear
CABLE#12	Clear 100'	12 Gauge Clear
CABLE#12	Clear 500'	12 Gauge Clear
CABLE#12	Black 500'	12 Gauge Black and Red
CABLE#14	Clear 25'	14 Gauge Clear
CABLE#14	Clear 50'	14 Gauge Clear
CABLE#14	Clear 100'	14 Gauge Clear
CABLE#14	Clear 500'	14 Gauge Clear
CABLE#14	Black 500'	14 Gauge Black and Red
CABLE#16	Clear 50'	16 Gauge Clear
CABLE#16	Clear 100'	16 Gauge Clear
CABLE#16	Clear 500'	16 Gauge Clear
CABLE#16	Clear 1000'	16 Gauge Clear
CABLE#16	Black 1000'	16 Gauge Black and Red
CABLE#18	Clear 25'	18 Gauge Clear
CABLE#18	Clear 50'	18 Gauge Clear
CABLE#18	Clear 100'	18 Gauge Clear
CABLE#18	Clear 500'	18 Gauge Clear
CABLE#18	Clear 1000'	18 Gauge Clear
CABLE#18	Black 1000'	18 Gauge Black and Red
CABLE#20	Clear 1000'	20 Gauge Clear
CABLE#20	Black 1000'	20 Gauge Black and Red
CABLE#22	Clear 1000'	22 Gauge Clear
CABLE#22	Black 1000'	22 Gauge Black and Red



VIDEO & AUDIO ACCESSORIES

SPEAKER CABLES



IS-SP-10-500CL

SPEAKER CABLE

- 10 Gauge
- 500 Ft.



IS-SP-12-500CL

SPEAKER CABLE

- 12 Gauge
- 500 Ft.



IS-SP-14-1000CL

SPEAKER CABLE

- 14 Gauge
- 1000 Ft.



IS-SP-16-1000CL

SPEAKER CABLE

- 16 Gauge
- 1000 Ft.



IS-SP-18-1000CL

SPEAKER CABLE

- 18 Gauge
- 1000 Ft.



IS-SERIES

OXYGEN FREE RCA CABLE

IS-3 (3 Feet)

IS-Y-M-2F (1 Feet)

IS-6 (6 Feet)

IS-Y-F-2M (1 Feet)

IS-17 (17 Feet)

VIDEO & AUDIO ACCESSORIES

SPEAKER CABLES



IS-SP-14-1000BR

SPEAKER CABLE

- 14 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud



IS-SP-16-1000BR

SPEAKER CABLE

- 16 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud



IS-SP-18-1000BR

SPEAKER CABLE

- 18 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud



IS-SP-20-1000BR

SPEAKER CABLE

- 20 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud

VIDEO & AUDIO ACCESSORIES

SPEAKER CABLES



N-214-6GB
N-214-12GB
N-214-25GB
N-214-50GB
N-214-75GB
N-214-100GB

- RG-6
- Black
- Gold Tips
- Twist on Connector ends




N-214-6GW
N-214-12GW
N-214-25GW
N-214-50GW
N-214-75GW
N-214-100GW

- RG-6
- White
- Gold Tips
- Twist on Connector ends



N-223-3GB
N-223-6GB

- RG-6
- Black
- Gold Tips
- Push on connector ends

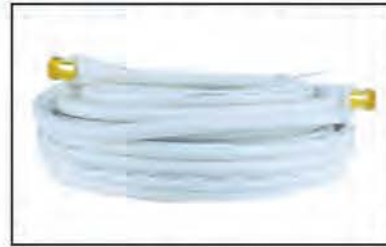

N-223-3GW
N-223-6GW
N-223-25GW
N-223-50GW
N-223-100GW

- RG-6
- White
- Gold Tips
- Push on connector ends



RCA-500

- Audio cable
- Mono
- 500 Ft.



RCA-503

- Audio cable
- Stereo
- 500 Ft.



VIDEO & AUDIO ACCESSORIES

VIDEO CABLES



N-214-3B N-214-3W
N-214-6B N-214-6W
N-214-12B N-214-12W

F TO F CONNECTORS

- Available in 3', 6', 12' & in Black or White



N-215
RCA TO RCA CONNECTORS
• 6'
• Black



N-215G
RCA TO RCA CONNECTORS
• 6'
• Black
• Gold Tips



N-217
BNC TO BNC CONNECTORS
• 6'
• Black

N-223-3B
N-223-6B
F TO F QUICK CONNECTORS
• Available in 3' or 6' in White
& 3', 6' or 12' in Black



VIDEO & AUDIO ACCESSORIES

VIDEO CABLES

V-075-6

3 RCA TO 3 RCA CABLE

- 6' nickel plated RCA Connectors
- Audio/Video
- Stereo
- Fully Molded
- Low-Loss
- Shielded



V-175

6' NICKEL PLATED RCA CONNECTORS

- Audio/Video
- Stereo
- Fully Molded
- Low-Loss
- Shielded
- Color Coded



V-275-3 (3')

V-275 (6')

V-277 (12')

AUDIO/VIDEO STEREO

- RG-6 video cable
- Fully Molded
- Low-Loss
- Shielded
- Color Coded
- Gold Plated RCA Connectors



V-250

AUDIO/VIDEO MONO

- Fully Molded
- LowLoss
- Shielded
- Color Coded
- Gold Plated RCA Connectors
- 6'



OFC-3 (3')

OFC-6 (6')

OFC-12 (12')

OPTICAL FIBER CABLE



NS-81

S-VIDEO ADAPTOR

- Coupler


VIDEO & AUDIO ACCESSORIES

VIDEO CABLES



HD-315-6 (6")
HD-315-12 (12")

- Component cable
- VGA to RGB component Cable

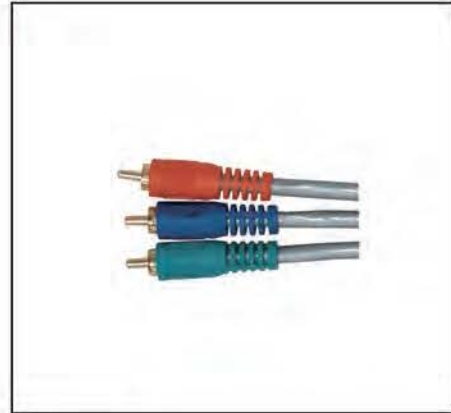

V-306 (6")
V-312 (12")

- Video only
- RGB Component Video Cable
- Connect DVD to high End TV
- Provide the Best Picture Transfer Available.



V-506 (6")
V-512 (12")
V-524 (24")

- Video & Stereo
- RGB Component Video Cable
- Connect DVD to high End TV
- Provides the Best Picture Transfer Available.



SV-6G

- High Grade SVideo Cable
- 6'
- Gold Tips



VIDEO & AUDIO ACCESSORIES

VIDEO CABLES



N-203

- Stereo
- 2 RCA plugs to 2 RCA plugs color coded
- Available in 3', 6', 12', 25' & 50'
- With Gold Connectors




N-203-4

- Stereo
- 4 RCA to 4 RCA
- Color Coded
- 6'



N-202

- 5 Pin DIN to 5 Pin DIN
- 6'

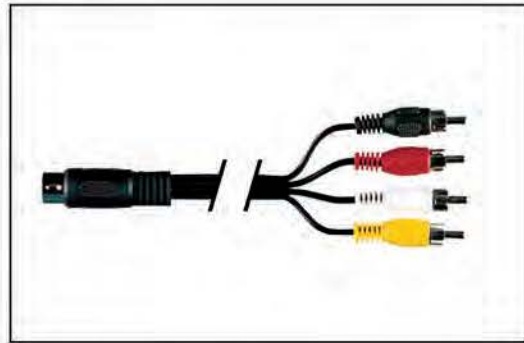

N-206P

- 5 Pin DIN to 4 RCA Plugs
- Shielded
- 6'



N-207J

- 1/4" to 2 RCA Jacks
- Mono plug



N-207P

- 1/4" to 2 RCA Plugs
- Mono plug



N-208

- 1/4" to 2 1/4" Jacks
- Mono plug

VIDEO & AUDIO ACCESSORIES

CABLES



N-209

- 1/4" to 1 RCA Plug & 1 RCA Jack



N-211J (stereo)

N-212J (mono)

- 3.5mm to 2 RCA jacks

N-213 (6" Inches)

N-213-G (6" Inches gold)

N-213-6 (6' Feet)

- 3.5mm to RCA plugs



N-216-3 (3' Feet)

N-216-6 (6' Feet)

N-216G (6' Feet)

N-216-3G (3' Feet)

- Stereo
- 3.5mm Plug to 3.5mm Plug
- 6'



N-221 (6" Inches)

N-221-6 (6' Feet)

- Stereo
- 3.5mm Plug to 2 3.5mm Jacks



N-311P-5

- 3.5mm Stereo/ Video plug to 3 RCA Cable

N-199S (stereo)

- Headphone Extension
- 3.5mm
- 20'



N-201S (stereo)

- Headphone Extension
- 1/4"
- 20'



VIDEO & AUDIO ACCESSORIES

CABLES



N-211P (6" Inches)
N-211P-6 (6' Feet)
N-211P-6G (6' Feet gold)
N-211P-12G (12' Feet gold)
• 3.5mm to 2 RCA plugs



N-218
• RCA Plug to 2 RCA Plugs



N-219 (6" Inches)
N-219-6 (6' Feet)
N-219G (6" inches gold)
• RCA Plug to 2 RCA Jacks



N-234-6 (6")
N-234-12 (12")
N-234-18 (12")
• Black
• 1/4" to 1/4"

N-350S-6
• 3.5 ST Plug to 3.5 ST
Jack
• 6'

N-350S-6G
• 3.5 ST Plug to 3.5 ST Jack
• Gold
• 6'

N-350S-12
• 3.5 ST Plug to 3.5 ST
Jack
• 12'



VIDEO & AUDIO ACCESSORIES

VIDEO ACCESSORIES

PA-10ZC

P.A. EQUIPMENT ZONE CONTROLLER

- Power source: 110V/60Hz
- 10 Partitions controller
- Power off memory for each partition
- Dual input/output available for each partition
- High power device with 10A available for each partition
- Dimension: 19" x 13.7" x 3.5" (480x350x90mm)
- Net weight: 14.9 Lbs (6.75 Kg)



PA-500BT

P.A. AMPLIFIER

- Power source: 110V/60Hz
- Power consumption: 480W
- RMS Power: 240W
- Max. Power: 360W
- Frequency response: 100Hz-16KHz+3dB
- THD: <0.1%@1KHz, 1/3 rated output power
- Output: 8Ω, 70V, 110V
- Aux output: 600Ω 1V (0dBV)
- Input: Mic: 1,2,3: 600Ω, 6mV (-55dBV) Aux: 1,2: 10KΩ, 250mV (-17dBV)
- S/N ratio: Mic: 1,2,3: >66dB Aux: 1,2: >70dB
- Tone control: Bass: ±10dB @ 100Hz Treble: ±10dB @ 10KHz
- Protection: AC Fuse, DC Voltage, overload and short circuit
- Muting function: 0~30dB
- Includes an MP3, USB and SD card
- Dimension: 17" x 10" x 3.5" (430x260x88mm)
- Net weight: 325.7Lbs (11.68KG)



PA-1000BT

P.A. AMPLIFIER

- Power source: 110V/60Hz
- Power consumption: 960W
- RMS Power: 480W
- Max. Power: 720W
- Frequency response: 100Hz-16KHz+3dB
- THD: <0.1%@1KHz, 1/3 rated output power
- Output: 8Ω, 70V, 110V
- Aux output: 600Ω 1V (0dBV)
- Input: Mic: 1,2,3: 600Ω, 6mV (-55dBV) Aux: 1,2: 10KΩ, 250mV (-17dBV)
- S/N ratio: Mic: 1,2,3: >66dB Aux: 1,2: >70dB
- Tone control: Bass: ±10dB @ 100Hz Treble: ±10dB @ 10KHz
- Protection: AC Fuse, DC Voltage, overload and short circuit
- Muting function: 0~30dB
- Includes an MP3, USB and SD card
- Dimension: 17" x 15" x 3.5" (430x388x88mm)
- Net weight: 37.3Lbs (16.9KG)



HDC-HDMI35

HD VIDEO AUDIO CONVERTER

- No need to install drivers
- Portable, flexible, plug and play
- Low power no need for a power supply
- Output the audio synchronized with video
- High output bandwidth, capable of supporting 3840 x 2160 @ 30Hz

TELEPHONE ACCESSORIES

CABLES



KR-205-15 / KR-205-25

MODULAR SINGLE JACK

- Extension Cord
- Ivory color
- Available in 15Ft and 25Ft.



KR-206

MODULAR DOUBLE JACK

- 25 Ft. Extension Cord
- Ivory color




KR-209-15-IV KR-209-15-WH KR-209-25-BK KR-209-25-IV KR-209-25-WH

MODULAR HANDSET

- Coiled Cord Made of Elastic Tinsel Material
- Available in 7', 15' & 25' in black, Ivory & White

KR-209-7-BK KR-209-7-IV KR-209-7-WH KR-209-15-BK



KR-220


FLAT TELEPHONE CABLE

- 4 conductors, Flat type
- Color coded
- 20 gauge
- 1000' spool

KR-425-7 KR-425-15 KR-425-25 KR-425-25-BK KR-425-25-WH KR-425-50 KR-425-100

MODULAR STRAIGHT LINE CORD

- Four pin plug to four pin plug
- Available in 9", 7', 15', 50' & 100'



KR-502

ROUND TELEPHONE CABLE

- 1000 ft. roll
- 2 pairs
- Solid core

KR-503

ROUND TELEPHONE CABLE

- 1000 ft. roll
- 3 pairs
- Solid core

TELEPHONE ACCESSORIES

ACCESSORIES

KR-127

MODULAR JACK ASSEMBLY

- 5 Outlet
- Plastic casing
- White color



KR-468

MODULAR SURFACE JACK

- 4 Pin Modular Surface Jack with Screws
- Stick-on Pad, Dual Jack



KR-468D

DOUBLE MODULAR SURFACE JACK

- 4 Pin Modular Surface Jack with Screws
- Stick-on Pad, Dual Jack



KR-468M

MINI MODULAR SURFACE JACK

- Mini modular surface jack



KR-175

TELEPHONES/VIDEO OUTPUT JACK

- Ivory color
- Plastic casing



KR-216

KR-216W

TELEPHONE SINGLE WALL JACK PLATE

- Flush Mount
- Available in Ivory and White color



KR-217

DUAL WALL JACK PLATE

- Flush Mount
- Available in Ivory & White



KR-218

CRIMPING TOOL

- 2 or 4 conductor crimper



KR-783

FLASHER/RINGER

- Plastic casing
- Ivory color



GTS-524

INTERCOM SYSTEM (PAIR)

- 110V
- Plastic casing

TELEPHONE ACCESSORIES

ACCESSORIES



KR-200

MODULAR IN-LINE COUPLER

- Plastic casing
- Ivory color



KR-201

TRIPLEX ADAPTOR

- Plastic casing
- Ivory color



KR-202

MODULAR DOUBLE ADAPTOR

- Plastic casing
- Ivory color



KR-203

MODULAR TRIPLE ADAPTOR

- 2 Line T-Junction
- 3 Jacks
- 1 Plug
- Ivory color



KR-204L

MODULAR OUTLET PLUG FOR HANDSET / 4 - PIN

- 1000 x Pack

KR-208L

MODULAR OUTLET PLUG FOR HANDSET / 2 - PIN

- 1000 x Pack



KR-128

HANDSET UNTANGLER ADAPTER

- Prevents tangled cords.
- Does not affect sound quality.
- Automatically rotates to eliminate twisted telephone cords

GOLD SERIES

SPLITTERS



N-1000G

2-WAY "F" SPLITTER
WITH SCREWS

- Bandwidth: 5-900MHz
- Impedance: 75 Ohm
- CATV signal
- Gold
- Connects two TVs from one antenna



N-1001G

MINI 2-WAY "F" SPLITTER
WITH SCREWS

- Bandwidth: 5-900MHz
- Impedance: 75 Ohm
- CATV signal
- Gold
- Connect two TVs from antenna



N-1003G

3-WAY "F" SPLITTER
WITH SCREWS

- Bandwidth: 5-900MHz
- Impedance: 75 Ohm
- CATV signal
- Gold



N-1005G

4-WAY "F" SPLITTER
WITH SCREWS

- Bandwidth: 5-900MHz
- Impedance: 75 Ohm
- CATV signal
- Gold



F-81G

FEMALE SPLICE CONNECTOR
FOR COAXIAL CABLE WITH NUT
AND WASHER

- Set of two
- Gold



NF-81G

FEMALE SPLICE CONNECTOR FOR
COAXIAL CABLE

- Set of two
- Gold



GOLD SERIES

CONNECTORS



NF-6G

TWIST-ON CONNECTORS FOR
RG-59 CABLE

- Set of two
- Gold



NF-56G

TWIST-ON CONNECTORS FOR
RG-6 CABLE

- Set of two
- Gold



P-101T-G

1/4" MONO PLUG WITH TAIL

- Metal body
- Gold



P-103T-G

1/4" STEREO PLUG WITH TAIL

- Metal body
- Gold



P-106S-G

3.5MM STEREO PLUG

- Set of two
- Gold



GOLD SERIES

VIDEO ACCESSORIES



P-110G

3.5MM STEREO PLUG TO 1/4" JACK

- Set of two
- Gold



P-119G

MOLDED ADAPTER

- RCA jack to RCA jack
- Set of two
- Gold



P-120G

RCA MALE TO RCA MALE

- Set of two
- Gold



P-127G

RCA PLUG

- Set of two
- Metal body
- Gold



P-219G

3.5MM STEREO COUPLER

- Set of two
- Gold



P-221G

RCA PLUG TO DOUBLE JACK

- Gold connectors

P-311SG

3.5MM TO 1/4" STEREO GOLD PLUG

- Sold by pairs



GOLD SERIES

AUDIO / VIDEO CABLES



SV-6G (6') / SV-12G (12')

HIGH GRADE S VIDEO CABLE

- Gold-plated connectors



V-306 (6')

V-312 (12')

RGB COMPONENT VIDEO CABLE

- Connect DVD player to high end TV
- Provides the best picture transfer available
- Gold plated RCA connectors



V-275 (6') / V-275-3 (3')

AUDIO/VIDEO STEREO CABLES

- Fully molded
- Low-loss signal
- Shielded color coded wires
- Gold-plated RCA connectors



V-250

AUDIO/VIDEO MONO CABLE

- Fully molded
- Low-loss signal
- Shielded color coded wires
- Gold-plated RCA connectors
- 6'



V-506 (6')

V-512 (12')

V-524 (24')

RCA COMPONENT VIDEO/STEREO CABLE

- Connect DVD player to high end TV
- Provides the best picture transfer available
- Gold-plated RCA connectors



GOLD SERIES

HIGH FREQUENCY SPLITTERS



KL-812A

2-WAY SPLITTER

- 5-2,300MHz bandwidth
- Power pass to all ports
- Silver



KL-813A

3-WAY SPLITTER

- 5-2,300MHz bandwidth
- Power pass to all ports
- Silver



KL-814A

3-WAY SPLITTER

- 5-2,300MHz bandwidth
- Power pass to all ports
- Silver



GOLD SERIES

CABLES



N-203-3G / N-203-6G

N-203-12G / N-203-25G

STEREO CABLE

- 2 RCA to 2 RCA
- Color coded wires
- Available in 3', 6', 12', 25'
- Gold tips



N-2163G (3')

N-216G (6')

3.5MM TO 3.5MM
STEREO AUDIO CABLE

- Gold tips



N-214-3B / N-214-6B / N-214-12B

F TO F CONNECTORS

- Available in 3', 6' & 12'
- in Black



N-219G

RCA STEREO PLUG TO
2 RCA STEREO JACKS

- Gold tips



N-231

TWO 3.5MM STEREO PLUGS TO ONE
3.5MM STEREO JACK

- Gold tips



N-350S-6G

3.5MM STEREO PLUG TO
3.5MM STEREO JACK

- 6'
- Gold tips



GOLD SERIES

CABLES



HD-315-6


HD-315-12

VGA TO RGB COMPONENT CABLE

- Gold tips



LAPTOP TO MONITOR/TV

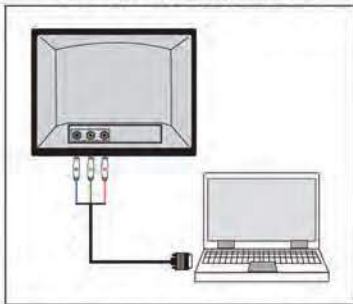

How to use HD-315-6/HD-315-12



N-215G

RCA TO RCA CONNECTORS

- 6'
- Gold tips



N-211P-6G

STEREO PLUG

- 3.5mm plug to 2 RCA plugs
- Gold tips



N-213G

3.5MM JACK TO 2 RCA PLUGS

- Gold tips



GOLD SERIES

VIDEO CABLES



N-214-6GB
N-214-25GB
N-214-50GB
N-214-75GB
N-214-100GB

- RG-6 coaxial cable
- Black
- Gold tips
- Screw-on connectors



N-214-6GW
N-214-25GW
N-214-50GW
N-214-75GW
N-214-100GW

- RG-6 coaxial cable
- White
- Gold tips
- Screw-on connectors



N-223-3GB
N-223-6GB

- RG-6 coaxial cable
- Black
- Gold tips
- Push-on connectors



N-223-3GW
N-223-6GW
N-223-25GW
N-223-50GW
N-223-100GW

- RG-6 coaxial cable
- White
- Gold tips
- Push-on connectors





BB-4IN1

BLACKBERRY® CHARGER 4 IN 1 VALUE PACK

- Plug the 12V Aux Power Outlet, the power indicator light will come on.
- Plug the Blackberry mini 5 pin wall travel charger into an AC outlet, the power indicator light will come on.
- Charge your Blackberry mini 5 pin directly from any computer with a USB port, light weight and compact.



IPOWER

IPOD® AC ADAPTER WILL POWER YOUR DIGITAL LIFESTYLE TO KEEP THE HITS COMING.

- Use this optional iPod® AC adapter, keep the hits coming with digital lifestyle. The sleek design and compact size is perfect for travel or home. This charger power iPod with 12V/1.0A. Supports regular iPod®, iPod mini® & iPod nano®.



IMULTI-CHARGE

3 IN 1 USB HYBRID CHARGER TRAVEL CHARGER

- Input AC: 110V ~ 240V (50/60Hz)
- Output DV: 5.0V ~ 5.5V 800mA

CAR CHARGER

- Input DC: 12V ~ 24V
- Output DC: 5.0V ~ 5.5V 800mA



ICHARGE

CAR CHARGER FOR IPOD® 12V

- Fits in all standard cigarette and auxiliary power adapters.
- Output: DC 5.0V 0.8A



ICHARGE-004

USB POWER ADAPTER 110V

- Input: AC 180-270V 0.1A 50/60HZ.
- Output: DC 5.0V 0.8A



ICHARGER-PD3IN1

UNIVERSAL CHARGER / CAR CHARGER USB CABLE FOR IPAD

- Universal combo accessories for all iPad
- With long and durable Coil Cord
- Plugs-in easily, fits in all standard Cigarette and auxiliary Power Adapters



ICHARGER-PD53IN1

3 IN 1 CHARGER

- Universal combo accessories for all iPad with long and durable cord
- Plugs-in easily, fits in all standard cigarette and auxiliary power adapters
- Input AC / Input DC
- Output DC / Output DC



Q-SIG4U

USB BT DONGLE

- BT V4.0
- BT low energy wireless USB adapter
- Dual-mode BT Transmission
- Supports BT Voice and Data
- Supports multi-language
- Wireless local area network share interface
- Supports network, dial-up, fax, LAN access
- Sensible rate: -86dB
- Transmission distance: 65.6' (20m)
- Interface: USB 2.0
- BT Driver: CSR Harmony Wireless Software Stack
- Available OS: Windows XP/Vista/7/8

(For Mobile Phone, Laptop, PDA, Headphone, etc.)



broadcast Audio from one device to another



ICARGE-107WH

UNIVERSAL USB SOCKET CHARGER

- Charge your USB-powered mobile electronics such as Digital cameras, mobile telephones and Computers.
- White color



ICARGE-107BK

UNIVERSAL USB SOCKET CHARGER

- Charge your USB-powered mobile electronics such as Digital cameras, mobile telephones and Computers.
- Black color

ICARGE-42A BL (BLUE)

ICARGE-42A RD (RED)

ICARGE-42A SL (SILVER)

HI-AMP DUAL USB CAR CHARGER

- For best performance use original cable provided by the manufacture of the device
- Input: 9~24V
- Output: 5V, 4.2A
- D+ Voltage: 2.06V
- D- Voltage: 2.8V
- Standby Current: 20 mA



ICL-TWOU-B

DUAL USB CAR CIGARETTE LIGHTER ADAPTER

- Output: 12~24V
- Charges iPod, iPhone, iPad other smartphones, MP3 and MP4 players, and cameras via USB port
- Smart fuse for surge protection



2 Ports

ICL-THREEU-B

TRIPLE USB CAR CIGARETTE LIGHTER ADAPTER

- Output: 12~24V
- Charges iPod, iPhone, iPad other smartphones, MP3 and MP4 players, and cameras via USB port
- Smart fuse for surge protection



3 Ports

IHD-300-RD6

IHD-300-BL6

IHD-300-GR6

IHD-300-GY6

HDMI ETHERNET CHANNEL

- Transports audio and video signals in one cable.
- 3D: Defines input/output protocols for major 3D video formats, paving the way for true 3D gaming and 3D home theater applications.
- High speed bandwidth up to 340MHz (10.2Gbps).
- Audio Return Channel0
- Supports 8-channel digital audio and new lossless audio format: Dolby TrueHD and DTS-HD Master Audio.
- 4K: Enables video resolutions up to 4 times of 1080p, 3840 x 2160@24Hz/25Hz/30Hz, 4060x2160@24Hz.
- Deep color from 24-bit up to 30-bit, 36-bit, 48-bit(sYCC601 color, Adobe RGB color or Adobe YCC601) color depths.



IFUA-3LGT-OR

USB to iPhone5, iPhone5s, iPad mini, iPad4

- Flat design with very flexible TPE jacket
- 100% Gold Plated USB Port
- 3' / 1m
- Color: **Orange**

IFUA-3LGT-GR

USB to iPhone5, iPhone5s, iPad mini, iPad4

- Flat design with very flexible TPE jacket
- 100% Gold Plated USB Port
- 3' / 1m
- Color: **Green**

IFUA-3LGT-GY

USB to iPhone5, iPhone5s, iPad mini, iPad4

- Flat design with very flexible TPE jacket
- 100% Gold Plated USB Port
- 3' / 1m
- Color: **Gray**



ICC-LC-RD5 (5' / 1.5m)

LIGHTNING TO USB SYNC/CHARGER CABLE
COILED CABLE FOR IPOD/IPHONE/IPAD

- USB to iPhone 6, iPhone 5/5s, iPad mini, iPad 4
- Use for iPod/iPhone/iPad to achieve synchronous data transfer and charging functions, stable performance, easy to use!



IFC-6MUM-GY (0.6' / 0.2m)

USB TO MICRO USB CABLE

- 100% Gold Plated USB Port
- Flat design with very flexible TPE jacket
- Up to 30% faster charging than conventional cables
- Compatible with Smartphone, Table PC, Mobile phone, MP3 player, Game pad
- Grey color

IFC-6MUM-WH (0.6' / 0.2m)

USB TO MICRO USB CABLE

- 100% Gold Plated USB Port
- Flat design with very flexible TPE jacket
- Up to 30% faster charging than conventional cables
- Compatible with Smartphone, Table PC, Mobile phone, MP3 player, Game pad
- Grey color



IFC-6LGM-GY (0.6' / 0.2m)

FLAT LIGHTING CABLE

- 100% Gold Plated USB Port
- Flat design with very flexible TPE jacket
- Up to 30% faster charging than conventional cables
- USB to iPhone 6, iPhone 5/5s, iPad Mini, iPad 4
- Grey color

IFC-6LGM-WH (0.6' / 0.2m)

FLAT LIGHTING CABLE

- 100% Gold Plated USB Port
- Flat design with very flexible TPE jacket
- Up to 30% faster charging than conventional cables
- USB to iPhone 6, iPhone 5/5s, iPad Mini, iPad 4
- Grey color





IRC-3535-GLD6 (GOLD COLOR) 3.5MM STEREO CABLE

- The soft material and configuration ensure the cable is easy to pack & use
- This pocket cable is more suitable for your multimedia devices to connect freely and easily
- It can help you to share your favorite music with other peoples by connecting your DVD, CD, mp3 and mp4 players or other multimedia devices to multimedia speakers
- 6' / 1.8m



IRC-3535-GRY6 (GRAY COLOR) 3.5MM STEREO CABLE

- The soft material and configuration ensure the cable is easy to pack & use
- This pocket cable is more suitable for your multimedia devices to connect freely and easily
- It can help you to share your favorite music with other peoples by connecting your DVD, CD, mp3 and mp4 players or other multimedia devices to multimedia speakers
- 6' / 1.8m



IRC-3535-ORG6 (ORANGE COLOR) 3.5MM STEREO CABLE

- The soft material and configuration ensure the cable is easy to pack & use
- This pocket cable is more suitable for your multimedia devices to connect freely and easily
- It can help you to share your favorite music with other peoples by connecting your DVD, CD, mp3 and mp4 players or other multimedia devices to multimedia speakers
- 6' / 1.8m



IRC-3535-SLV6 (SILVER COLOR) 3.5MM STEREO CABLE

- The soft material and configuration ensure the cable is easy to pack & use
- This pocket cable is more suitable for your multimedia devices to connect freely and easily
- It can help you to share your favorite music with other peoples by connecting your DVD, CD, mp3 and mp4 players or other multimedia devices to multimedia speakers
- 6' / 1.8m

IRC-3535-RED6 (RED COLOR) 3.5MM STEREO CABLE

- The soft material and configuration ensure the cable is easy to pack & use
- This pocket cable is more suitable for your multimedia devices to connect freely and easily
- It can help you to share your favorite music with other peoples by connecting your DVD, CD, mp3 and mp4 players or other multimedia devices to multimedia speakers



6' / 1.8m



iCHARGE 3IN1

UNIVERSAL HOLDER/CAR CHARGER FOR IPOD®

- In-car value pack
- Universal combo accessories for all iPods with dock connector
- Plays iPod® over car stereo
- High quality, clamshell packing
- White color



iCHARGE-3IN1 BK

UNIVERSAL HOLDER/CAR CHARGER FOR IPOD®

- In-car value pack
- Universal combo accessories for all iPods with dock connector
- Plays iPod® over car stereo
- Black color



iCHARGE-3IN1-I5

UNIVERSAL COMBO ACCESSORIES FOR IPHONE 5 WITH DOCK CONNECTOR

- With long and durable Coil Cord
- Plugs-in easily, fits in all standard Cigarette and auxiliary Power Adapters



IF-400-3IP

PLAY MUSIC FROM YOUR DIGITAL MEDIA PLAYER OVER YOUR CAR STEREO.

- Large LCD display with blue background light.
- Media players battery charges automatically while music is playing.
- Transmit on more than 100 available frequencies.
- Mini USB to iPod connector & 3.5mm jack stereo cables included.
- Compatible with all iPods/iPhone, include iPhone-3G, iPod Nano 4G, Touch 2G.z

IPT-FM005

ALL KIT FM TRANSMITTER

This AllKit model works as an FM Transmitter for all Dock port iPod, iPhone®, iPhone 3G® models. It features a digital FM frequency display neatly mounted on the top of the cradle. It also moves on from the older ridged mounts and features a bendy Flexible Goose-pipe charging arm to allow you to easily mount this kit in any car with full adjustment.



IS-CMT-AR-6

UNIVERSAL DASHBOARD/WINDSHIELD
SMARTPHONE MOUNT

- Works on the windshield or dashboard of the car
- Compatible with devices up to 82mm width
- Quick release device with a tap of your finger



IS-CMT-VT-2

UNIVERSAL VENT MOUNT

- Three sets of vent clips for any vent configuration
- Compatible with devices up to 82mm width
- Wide-range Compatibility (50mm-82mm)



NP-8635USR

CAR MP3 FM TRANSMITTER

- With LCD Screen, Display the No.
- 206 Channels optional: 87.5~108MHz
- Supports 4 Loop Modes
- Memorizes the last played frequency, song & volume
- Supports USB Disk & SD/MMC Card
- Supports 12~24 Voltage
- Switch the Folder by remote directly



NP-2G-2TFT-RAMV

CAR MP3 FM WITH FM MODULATOR

- 2" High Definition TFT Video Monitor
- Supports MP3/WMA Format Audio Files
- Power Supply: 12/24V
- Supports AMV Format Video Files
- JPG Picture Shuttle Browser
- 2GB Built-in Flash Memory
- SD/MMC Compatible
- Built-in Wireless FM Transmitter
206 Channel
- Built-in preset EQ 7 music choices



NP-2G-R

CAR MP3 FM TRANSMITTER

- Built-in 2GB Flash memory
- U disk+FM transmitter+car charger
3-1 function
- Supports MP3/WMA format files
- 206 channels optional: 87.5-108MHz
- Supports folder switch
- With infrared remote control



NP-7935USB

CAR FM TRANSMITTER

- 1.4" large LCD screen can display the
frequency and song number
- Supports USB Disc & SD/MMC Card
- Line-in Function
- Supports MP3/WMA format files
- 206 Channels optional: 87.6-108MHz
- Supports folder switch & 4 loop mode
- Supports 6 EQs
- Fully adjustable Arm for Multi Angle Viewing
- With Wireless full Function Remote Control
- Transmit Distance: 3-5M
- Input: DC 12-24V
- Supports up to 32G USB
memory pen drive



NP-9935USB

2 IN 1 CAR FM TRANSMITTER + 2.1A DUAL
USB CAR CHARGER

- 1" large LCD screen can display the frequency
and song number
- Dual USB charging Port for charging iPad,
iPhone and other rechargeable devices
- Supports USB Disc & SD Card
- Line-in Function
- Supports MP3/WMA format files
- 206 Channels optional
- Supports folder switch & 4 loop mode
- With Wireless full Function Remote Control
- Transmit Distance: about 10M
- Input: DC 12-24V
- Output: 5V/2.1A
- Supports up to 32G USB memory pen drive





IC-100

CASSETTE ADAPTOR

- for CD player, MP3 player and Mini Disc
- Usage: This product enables any portable CD, MP3 player(s) with a headphone jack built-in, to be heard through the speakers of any cassette playback system. This includes automobile or portable cassette players.



ICABLE-SUMU

MICRO-USB TO HDMI ADAPTER CABLE

- Interface: MHL specification v.1.0
- Bandwidth: 25MHz-75MHz
- Connectors: Micro USB (in) HDMI (out), USB 2.0 (power)
- Video: 1080p HD
- Audio: 8-channel (e.g. 7.1 surround) digital audio
- Power supply: 5V DC, up to 0.1A from USB 2.0
- Cable length: 1.8m



ICABLE-002

COMPOSITE RCA AV CABLE FOR iPod®

- Charges and syncs your iPod through your computer's USB port for easy connectivity 6' of length for flexible setup options.
- Compatible with: 1st-3rd generation iPod classic; 1st and 2nd generation iPod Touch; 3rd iPod Nano.



ICABLE-020

3.5MM PLUG TO 3.5MM PLUG
with small heads.
1 meter long.
All white.



IW-02BL

USB 2.0 CABLE

- in Blister package
 - Cable length is 2 Meters, compatible with all iPods® with dock connector.
- IW-02 is a low-noise, high speed USB 2.0 cable. This USB cable features high-quality connectors for faster, more accurate signal transfers up to 480Mbps. 100% USB 2.0 compliant and is ideal for use with all USB 2.0 and 1.1 devices.



IW-03

RETRACTABLE USB CABLE FOR iPod® WITH DOCK CONNECTOR

IW-03 is a high quality, fast sync cable for iPod, the retractable wire is ideal for travel. Extended cable length max. 75cm.



IW-04

Retractable 3.5mm connection cable

- 3.5mm DC to DC stereo cable connects media device to stereo input
- Retractable wire, easy to use
- Blister card packing



IW-05

3.5mm ADAPTOR TO RCA CABLE

- 3.5mm female plug to dual RCA Plugs
- Silver-plated plug
- Blister card packing

IW-200

32" USB POWER ADAPTER

- Compatibility: iPod® nano 1G, 2G; iPod® mini; iPod 3G, 4G, 5G, 5.5G
- Requires iPod USB Power Adapter for charging iPod®



IWS-SAM-RS

REVERSIBLE USB 2.0A MALE TO MICRO USB CABLE

- High Speed USB 2.0
- Compatible with smart Phone
- Charging and Data Transmission
- Nickel plated connectors
- Both connectors are reversible



IP-35-USB6

3.5MM AUDIO/VIDEO STEREO PLUG TO USB CABLE

- 6 ft.
- White Color



IP-200

3.3' CHARGE & SYNC USB CABLE

- Transfer music and pictures in seconds
- Charge & Sync through your computer
- Cable Length: 3.3'(1m)
- Cable Gage: 0.14"(3.5mm)



IPLUG

3.5MM EARBUD SPLITTER

- Music always sounds better when you have someone to share it with. IPLUG makes sharing simple, anytime and anyplace.



ICONVERT-4T05CA

I4 TO I5 CHARGER ADAPTER

- 8.5"(21.6cm)
- 30-pin Adapter



N-3514-6

3.5MM PLUG TO 1/4" PLUG CABLE

- 6'



ICONVERT-4T05PL

I4 TO I5 CHARGER ADAPTER

- 30-pin Adapter



N-3525-06

ADAPTER 3.5MM PLUG TO
2.5MM SOCKET

- 6"



N-3535-06

ADAPTER 3.5MM PLUG
TO 3.5MM PLUG

- 6"



IW-3535

3.5MM CONNECTOR CABLE

- 3'



IW-35D35

EARPHONE SPLITTER

- 3.5mm stereo plug to two 3.5mm jacks



IW-35D35-6

3.5MM EARPHONE SPLITTER

- 6' Cable



IW-AMM-USB

ISTUFF WHITE STRAIGHT CABLE DOCK

- High Speed USB 2.0
- Compatible with iPod, iPhone, Blackberry, Samsung and most mobile phones
- Charging and Data Transmission
- 4'



IW-17AV-U

AV CABLE FOR IPAD/IPHONE/IPOD SERIES

- High quality video and stereo audio
- View your iPad/iPhone/iPod images and video on your TV
- Maintains high definition resolution
- Unique design, charges your iPhone/iPod
- Sync's your iPad/iPhone/iPod with your computer
- Multi-function AV component cable
- 4' / 1.2m



IW-200BLED

VISIBLE LIGHT CHARGE CABLE

- When the power of devices is less than 65%, the light will flow very fast; When it is in 65%-99% the velocity of light will be reduced, until it stops. You can see the flowing current! Connect magic visible cable into PC or AC charger, iphone, ipad, ipod, star charging while LED light flashing. The flashing speed up to the rest electric of the iphone, ipad, ipod, which shows shining current.



IWS-02MIB

MINI USB TO USB CABLE

- High Speed USB 2.0
- Compatible with Mobile Phone, Mp3, Mp4 & Camera
- Charging and Data Transmission
- 3.3' / 1m



IWS-02MOB

MICRO USB TO USB CABLE

- High Speed USB 2.0
- Compatible with Android Smart Phones
- Charging and Data Transmission
- 3.3' / 1m



IWS-20SMT

CHARGING CABLE FOR SAMSUNG TABLET

- High Speed USB 2.0
- Compatible with Samsung Tablet PC
- Charging and Data Transmission
- 3.3' / 1m




- Frequency Range: 2.4-2.48GHz
- Transmission Power: Class2
- Operating Voltage: 3.6V
- Operating Current: Bluetooth≤14mA
- Standby Current: ≤0.5mA
- Transmission Distance: ≥10M(Open Space)
- Headset Size: 5.1"x5.5"x0.7" (130x140x18mm)
- Music Time: 6Hr
- Charging Time: 2-3Hr
- Talking Time: Up to 6Hr
- Standby Time: Up to 160Hr
- Weight: 0.15Lb(69g)
- Bluetooth 3.0
- DSP Technology with Cancellation and Echo Suppression

QR1-BT-WH

iStuff

Unique slim Wireless HiFi Stereo Headphone




- Frequency Range: 2.4-2.48GHz
- Transmission Power: Class2
- Operating Voltage: 3.6V
- Operating Current: Bluetooth≤14mA
- Standby Current: ≤0.5mA
- Transmission Distance: ≥10M(Open Space)
- Headset Size: 5.1"x5.5"x0.7" (130x140x18mm)
- Music Time: 6Hr
- Charging Time: 2-3Hr
- Talking Time: Up to 6Hr
- Standby Time: Up to 160Hr
- Weight: 0.15Lb(69g)
- Bluetooth 3.0
- DSP Technology with Cancellation and Echo Suppression

QR1-BT-BK

iStuff

Unique slim Wireless HiFi Stereo Headphone



PPS8 (Physical Positioning Surround) Sound Effect.



CONNECTIVITY:

- Bluetooth profiles: aptX, A2DP, AVRCP, HFP, HSP
- Bluetooth version: 4.0
- Audio Connections: 3.5mm Line in
- Maximum range: Up to 20m

SOUND:

- Magnet type: Neodymium
- Speaker diameter: 50mm (32Ω) x 2, 13mm (16Ω) x 6
- PPS8 (Physical Positioning Surround Sound)
- Frequency range: 5-2500Hz
- Sensitivity: 110dB±3dB
- Maximum Power Amplifier

CONVENIENCE:

- Call Management: Switch between call and music, Answer/End Call, Reject Call, Last number redial
- Volume Control

POWER:

- Battery Type: Li-Polymer
- Rechargeable
- Music play time: Up to 25hr
- Standby time: Up to 1300hr
- Talk time: Up to 28hr

ACCESSORIES:

- Pouch
- Audio cable
- User Manual
- USB cable: Included for charging



iStuff

QR2-BT-WH

Wireless HiFi Stereo Headphone



CONNECTIVITY:

- Bluetooth profiles: aptX, A2DP, AVRCP, HFP, HSP
- Bluetooth version: 4.0
- Audio Connections: 3.5mm Line in
- Maximum range: Up to 20m

SOUND:

- Magnet type: Neodymium
- Speaker diameter: 50mm (32Ω) x 2, 13mm (16Ω) x 6
- PPS8 (Physical Positioning Surround Sound)
- Frequency range: 5-2500Hz
- Sensitivity: 110dB±3dB
- Maximum Power Amplifier

CONVENIENCE:

- Call Management: Switch between call and music, Answer/End Call, Reject Call, Last number redial
- Volume Control

POWER:

- Battery Type: Li-Polymer
- Rechargeable
- Music play time: Up to 25hr
- Standby time: Up to 1300hr
- Talk time: Up to 28hr

ACCESSORIES:

- Pouch
- Audio cable
- User Manual
- USB cable: Included for charging

iStuff

QR2-BT-GM

Wireless HiFi Stereo Headphone





IBUD-5

STEREO EARPHONE

- Listening to your iPod® on the go is even more convenient with this wired extra set of earphones, works with all iPod® & any other audio players. Digital stereo sound.
- 4 Ft.



IPE-004

EARPHONE FOR IPOD

- Precision balanced speaker for full-spectrum sound without distortion.
- Audio filter to shape sound for maximum detail.
- Ultra lightweight housing for durability and component protection.
- Built in stop and play button
- Built in microphone
- 6 Ft.

HPI-357

FOLDABLE DIGITAL HEADPHONES

- Speaker: Ø40mm SUPER BASS Neodymium Speaker
- Impedance: 32 Ohms
- Frequency Response: 20-20k Hz
- Sensitivity: 112 dB
- Max. Input Power: 100mV
- Input Connection: 3.5mm Gold Stereo Plug
- Cord Length: 1.2M



QE3-BT-BLK

WIRELESS STEREO HEADSET

- Bluetooth Profiles: HSP, HFP, A2DP, AVRCP
- Music Time: 4-5 Hours
- Standby time: Up to 250 Hours
- Charging port: Micro USB
- Battery status indication: Support IOS/Android (Optional)
- Voice prompt: YES
- Charge time: 2 Hour



QE5N-BT-BLK

WIRELESS STEREO HEADSET

- Ultralight elastic memory material, easy to carry
- Vibrates to remind you not to miss any incoming calls
- Simultaneously connect multiple device to easily switch calls Entertainment
- High-fidelity stereo sound audio earphones for total entertainment
- Intelligent noise reduction allows for clearer calls
- Long standby (360 hours), talk time (10 hours)



QR1-BT-BK (BLACK COLOR)

WIRELESS HI-FI STEREO HEADSET

- Operating Current: Bluetooth≤14mA
- Standby Current: ≤0.5mA
- Transmission Distance: ≥10M(Open Space)
- Music Time: 6Hr
- Charging Time: 2-3Hr
- Talking Time: Up to 6Hr
- Standby Time: Up to 160Hr
- Bluetooth 3.0
- DSP Technology



QR1-BT-WH (WHITE COLOR)

WIRELESS HI-FI STEREO HEADSET

- Operating Current: Bluetooth≤14mA
- Standby Current: ≤0.5mA
- Transmission Distance: ≥10M(Open Space)
- Music Time: 6Hr
- Charging Time: 2-3Hr
- Talking Time: Up to 6Hr
- Standby Time: Up to 160Hr
- Bluetooth 3.0
- DSP Technology



QR2-BT-GM (BLACK COLOR)

WIRELESS HI-FI STEREO HEADSET

- Bluetooth profiles: aptX, A2DP, AVRCP, HFP, HSP
- Bluetooth version: 4.0
- Audio Connections: 3.5mm Line in
- Maximum range: Up to 20m
- Maximum Power Amplifier
- Volume Control
- Battery Type: Li-Polymer
- Rechargeable



QR2-BT-WH (WHITE COLOR)

WIRELESS HI-FI STEREO HEADSET

- Bluetooth profiles: aptX, A2DP, AVRCP, HFP, HSP
- Bluetooth version: 4.0
- Audio Connections: 3.5mm Line in
- Maximum range: Up to 20m
- Maximum Power Amplifier
- Volume Control
- Battery Type: Li-Polymer
- Rechargeable





Q1BLUE / Q1GREEN

Q1PINK / Q1WHITE

PORTABLE WIRELESS SPEAKER

- Signal to noise ratio: >80dB
- Driver: 4 ohm, 3 watt
- Power input: micro USB
- Bluetooth function offers range up to 10 meters
- 3.5mm stereo line-in
- Rechargeable Li-ion battery



Q2BLACK

Q2BLUE

Q2RED

PORTABLE WIRELESS SPEAKER

- Signal to noise ratio: $\geq 80\pm 2$ dB
- Driver: 4 ohm, 3 watt
- Power input: micro USB
- Bluetooth function offers range up to 10 meters
- 3.5mm stereo line-in
- Rechargeable Li-ion battery



Q3BLACK / Q3BLUE

Q3SILVER / Q3WHITE

BLUETOOTH MINI SPEAKER

- Signal to noise ratio: > 80dB
- Driver: 4 ohm, 3 watt
- Power input: micro USB
- Playing distance: 15 meters
- Built-in mic offers hands-free function
- Rechargeable Li-ion battery



Q4PINK

MOBILE WIRELESS SPEAKER AND STAND

- Driver: 4 ohm, 3 watt
- Speaker diameter: 40mm
- Playback time: 4-6 hrs.
- Charging time: 2-2.5 hrs.



Q5BLACK

Q5BLUE

Q5PINK

STEREO WIRELESS SPEAKER

- Signal to noise ratio: ≥ 75 dB
- Driver: 4 ohm, 3 watt x 2
- Power input: mini USB
- Bluetooth 3.0 function offers range up to 10 meters
- 3.5mm stereo line-in
- Rechargeable Li-ion battery



Q6B

BLUETOOTH SPEAKER

- with Handsfree Compatible with PC, MP3, MP4 and all audio devices with 3.5mm output jack or Bluetooth
- Conveniently charges with any common USB port



Q8BC

BLUETOOTH SPEAKER

- with Handsfree Compatible with PC, Mp3, Mp4 and all audio devices with 3.5mm output jack or Bluetooth
- Conveniently charges with any common USB port



QPB3BLUE / QPB3GREEN

QPB3PINK / QPB3WHITE

HOCKEY 3000 POWER BANK

- Available in:
Green color
Pink color
Blue color
White color

Q-WS2BT-BK

WIRELESS STEREO HEADSET

- Output power: 3.0W
- Hi-fi stereo speaker (4Ω/3W)
- Input sensitivity: AUX: 450mV; TF/USB: 450 mV
- SNR: ≥68dB
- Battery capacity: 1000mAh
- Black color



Q-WS2BT-WH

WIRELESS STEREO HEADSET

- Output power: 3.0W
- Hi-fi stereo speaker (4Ω/3W)
- Input sensitivity: AUX: 450mV; TF/USB: 450 mV
- SNR: ≥68dB
- Battery capacity: 1000mAh
- White color





IFLASH-90CL

ROTATABLE FLASHLIGHT & CAR CHARGER

- Size: $\Phi 26 \times 145\text{mm}$
- Capacity of built-in Li-battery: 1400mAh
- Output: DC 5V/500mA-1A
- Input: DC 12V-24V/10A
- Power of LED lamp: 1W
- Main material: ABS & Aluminum



ICHARGE-115

USB CHARGER

- Input: 100-240V, 50/60Hz, 0.15A
- Output: 5V/1A
- Charges iPod®, iPhone®, other smartphones, mp3 & mp4 players, and cameras via USB port



ICHARGE-235

2 WAY USB WALL CHARGER

- Input: 100-240V AC
- Charges iPod, iPhone, iPad, other smart phones, tablet PC, MP3 and MP4 players, PSP, and cameras via USB port
- 2 Ports



ICHARGE-4235

4 WAY USB CHARGER WALL CHARGER.

- Input: 100-240V AC
- Charges iPod, iPhone, iPad, other smart phones, tablet PC, MP3 and MP4 players, PSP, and cameras via USB port
- 4 Ports





E2

USB 2.0 CONNECTOR

- 3.5mm wire control cable allows audio to be played through your PC, Notebook, DVD player and cell phones
- Requires no external batteries



E2N

USB 2.0 CONNECTOR

- 3.5mm wire control cable allows audio to be played through your PC, Notebook, DVD player and cell phones
- Requires no external batteries

IWS-TAB7-BT

EASILY CONNECTS TO YOUR GALAXY TAB AND OTHER POPULAR TABLETS AND MULTIMEDIA DEVICES

- Elegant slim design case offer strong protection for the Galaxy Tab3 7 inch
- Ideal for home, school, office and mobile use
- Built-in lithium ion battery
- Fully charges in 4-4.5 hours
- Micro-USB charger
- Works with other Bluetooth products



IWS-TAB10-BT

EASILY CONNECTS TO YOUR GALAXY TAB AND OTHER POPULAR TABLETS AND MULTIMEDIA DEVICES

- Elegant slim design case offer strong protection for the Galaxy Tab 10.1 inch
- Ideal for home, school, office and mobile use
- Built-in lithium ion battery
- Fully charges in 4-4.5 hours
- Micro-USB charger
- Works with other Bluetooth products



IWS-TAB-IPADAIR

LEATHER CASE FOR IPAD AIR

- With USB keyboard



IWS-TAB-IPADM2

LEATHER CASE FOR IPAD MINI 2


- With USB keyboard



Q-SIG10-BK

BLUETOOTH RECEIVER

- Version: 2.1
- Rechargeable Battery: 350mAh
- Power consumption: 5V, 1A
- Charging time: 2Hrs
- Battery Life: 5~7Hrs
- Ports: 3.5mm Audio output, mini USB for Charging
- Range: 10M
- LED indicators for charge and connection
- Package Content: 1 x Bluetooth Receiver, 1 x 3.5mm Cable, 1 x Mini USB Cable
- Weight: 0.05LB (21g)
- Dimensions: 2.4" x 1.4" x 0.6" (6x3.6x1.5cm)

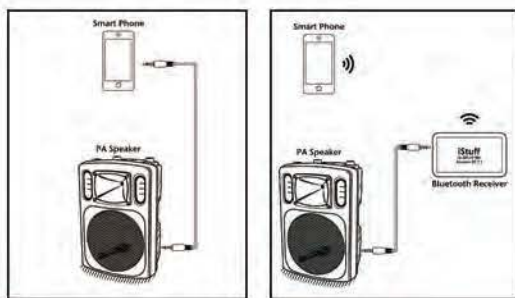


CONVERTS ANY WIRED AUDIO INPUT TO A WIRELESS INPUT



Q-SIG10-WH

BLUETOOTH RECEIVER

- Version: 2.1
- Rechargeable Battery: 350mAh
- Power consumption: 5V, 1A
- Charging time: 2Hrs
- Battery Life: 5~7Hrs
- Ports: 3.5mm Audio output, mini USB for Charging
- Range: 10M
- LED indicators for charge and connection
- Package Content: 1 x Bluetooth Receiver, 1 x 3.5mm Cable, 1 x Mini USB Cable
- Weight: 0.05LB (21g)
- Dimensions: 2.4" x 1.4" x 0.6" (6x3.6x1.5cm)

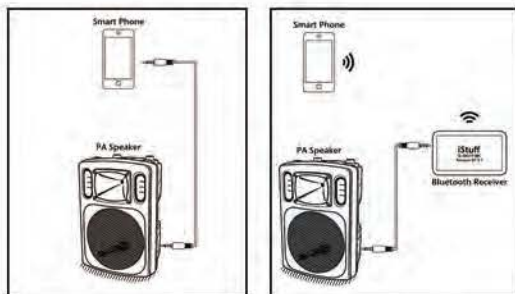

CONVERTS ANY WIRED AUDIO INPUT TO A WIRELESS INPUT



COMPUTER ACCESSORIES

CABLES / ACCESSORIES



IBM-205-6

USB A MALE TO USB A FEMALE CABLE

- 6Ft.
- Extends USB connection to computer, for use with printers, cameras, mouse, keyboards and other USB computer peripheral



IBM-312MAMA

USB 3.0 A MALE TO A MALE CABLE

- 12'
- Carries USB 3.0 data signals and power
- Shielded to protect from interference
- PC and Mac compatible.



IBM-312MAMB

USB MALE TYPE A TO USB MALE TYPE B MALE

- 12Ft.
- Makes plug-and-play connections for devices such as modems, printers, and other USB peripherals



IBM-425-3 (3')

IBM-425-6 (6')

IBM-425-10 (10')

IBM-425-15 (15')

IBM-425-25 (25')

IBM-425-50 (50')

IBM-425-75 (75')

IBM-425-100 (100')

CAT5 PATCH CORD

- RJ45 plugs
- Booted
- Stranded
- Available in ivory
- UL approved



IBM-A-B-6

USB A MALE TO B MALE CABLE

- 6Ft.
- Commonly used for printers, scanners and other devices

COMPUTER ACCESSORIES

ACCESSORIES



IBM-USB-MB

USB TO MINI B USB ADAPTER

- Allows easy conversion of cables commonly used for digital cameras



IBM-USBF-MIN5

USB FEMALE TO MINI 5PIN

- Allows easy conversion of cables commonly used for digital cameras



BL-IBM-AFAF200

USB A TYPE FEMALE COUPLER

- Platinum plated connectors



IBM-RJ45

RJ45 PLUGS

- Wire insert
- 8p8c
- 50u gold
- For use with solid and stranded cables



IBM-426-7

IBM-426-14

FTP (SFTP) PATCH CORD

- with CAT6 cable
- Molded
- Available in; 7' & 14'



IBM-A-BMINI-10

USB A TO MINI B USB CABLE

- Commonly used for digital cameras, cell phones, MP3 players, PDA devices
- 10'

COMPUTER ACCESSORIES

ACCESSORIES



BL-IBM-104USB

USB 4-PORT HUB

- Includes hub and USB cable
- Suitable for notebooks



BL-IBM-USB35-HM

INTEGRATED 2CH USB AUDIO CONTROLLER

- Supports 3D sounds (AC-3) and virtual 5.1 surround sound track
- The best entertainment for listening to DVD, CD's and general online content
- Plug and Play, no software required
- Eliminate the need for a traditional sound card with this USB to audio adapter. Real USB plug & play to upgrade any on-board sound card to 5.1 Digital
- Surround Sound without any hardware installation
- Connect a speaker or headphone directly

BL-IBM-MOS300

USB OPTICAL WHEEL MOUSE

- High-precision mouse
- Plug and play no driver required
- Ergonomic design



USB Connector

BL-IBM-KB350-SP

SPANISH KEYBOARD

- Unique slim design, stylish configuration, comfortable feeling
- Compatible with all operating systems



USB Connector

español

SLIM
KEYBOARD

BL-IBM-KB300

SLIM KEYBOARD

- Unique mute design, style configuration, comfortable feeling
- Compatible with all operating systems
- Multiple language version available



USB Connector

BL-IBM-KM500

2.4GHZ WIRELESS KEYBOARD AND MOUSE COMBO

- Unique slim design, stylish configuration, Comfortable feeling
- Compatible with all operating systems
- High precision optical sensor 800/1200/1600 DPI
- Precision scroll wheel
- Nano receiver receptacle
- Auto standby mode
- On/Off switch
- Advanced 2.4 GHz RF Wireless technology provides up to 10 meter multi directional range and practicality interference free use
- Setting up the Wireless combo is easy. Simply insert the batteries and connect the ultra-small Nano Receiver, and you are ready to go. No Setup, No Software, No Hassle.
- An automatic multi-layered Power Saving feature on both the Keyboard and the Mouse means you can use them longer without needing to change the batteries.



COMPUTER ACCESSORIES

ACCESSORIES

CATEGORY 5 CATEGORY 5 BLUE CATEGORY 6

- 1000' CAT5 UTP CABLE
- 4 pairs of gauge wire inside
- Solid strand
- Pull box



CATEGORY 5 UL CATEGORY 5UL RD CATEGORY 5UL YW CATEGORY 6 UL

- 1000' CAT5E LAN CABLE
- Solid strand
- UL approved



IBM-200
RJ-45 ADAPTER
• Coupler



IBM-468
CAT5 SINGLE SURFACE MOUNT BOX
• Loaded
• 110IDC
• Non-shielded
• Pre-mounted on PC board



IBM-468D
DUAL CAT5 SINGLE SURFACE MOUNT BOX
• Loaded
• 110IDC
• Non-shielded
• Pre-mounted on PC board



AC-400
6' COMPUTER AC POWER CORD
• AWG 18
• 3 conductor
• Black jacket



IBM-RJ-CAT6
RJ-45 ADAPTER
• Plug for CAT6



PINS#16
I.C. SOCKETS

COMPUTER ACCESSORIES

LAPTOPS ACCESSORIES

IBM-FAN-200

NOTEBOOK COOLING PAD

- Three color fan cooling system pulls heat away from the laptop and prevents the CPU from overheating during use
- Powered through USB port
- Great ergonomic shape for easy typing
- Plug and play for USB devices
- Centralized fan blade for quiet operation
- Material: acrylic
- Fan size: 6 x 6 x 1.5 cm



SPLICES USB PORT



IBM-FAN-275R

NOTEBOOK COOLING PAD

- Silent 140mm fan with great cooling performance
- Blue LED shines through the center mesh
- Large metal mesh for superior airflow
- Two height settings for ideal viewing and typing angle
- USB pass-through connector preserves laptop USB connector
- Overall dimensions: 330 x 250 x 22mm
- Fan dimensions: Ø140mm x 15mm
- Fan speed: 1000 rpm ±10%
- Power: DC 5V



SUPPORT UP TO
15"
16" LAPTOPS

Super slim design easy to carry

IBM-FAN-300X

NOTEBOOK COOLING PAD

- Silent 120mm fan with great cooling performance
- Blue LED shines through the center mesh
- Large metal mesh for superior airflow
- Two height settings for the ideal viewing and typing angle
- USB port x 2
- Overall dimensions: 345 x 275 x 54mm
- Fan dimensions: Ø120mm
- Fan speed: 1500 rpm ±10%
- Power: DC 5V



SUPPORT UP TO
15"
16" LAPTOPS

COMPUTER ACCESSORIES

LAPTOPS ACCESSORIES

DLPT-902LUSB

90W AUTOMATIC UNIVERSAL AC ADAPTER FOR LAPTOP

- USB port charges for smart phone, MP3, MP4, iPad, iPhone, Tablet PC, PDA and other related Devices with standard USB Output
- Multiple Types of interchangeable connectors
- Safe and reliable, variable voltages range from 9.5V~24V
- Multi country ready (100V~240V)
- High Grade ABS Housing
- Fire retardant case
- Incorporates EMC and EMI Technology, for absorbing current Burst and controlling the Circuitry



Type	Output	Connector Size	Laptop Brand
15.0V/M1	15.0V/Max 90W	6.3 x 3.0mm	Toshiba
16.0V/M2	16.0V/Max 90W	5.5 x 2.5mm	IBM, Lenovo
16.0V/M3	16.0V/Max 90W	6.5 x 1.4mm	Sony, Fujitsu
18.5V/M4	18.0V/Max 90W	4.8 x 1.7mm	Compaq, HP
19.0V/M5	19.0V/Max 90W	5.5 x 2.5mm	Acer, Compaq, Delta, HP, Fujitsu, Gateway, Toshiba, Liteon
19.0V/M6	19.0V/Max 90W	5.0 x 3.0mm	Samsung
19.0V/M7	19.0V/Max 90W	5.5 x 2.1mm	Acer, Compaq, Delta, HP, Fujitsu, Gateway, Toshiba, Liteon
19.5V/M8	19.5V/Max 90W	6.5 x 1.4mm	Sony
19.5V/M9	19.5V/Max 90W	7.4 x 5.0mm	Dell
20.0V/M10	20.0V/Max 90W	3 Pin Connector	Dell
20.0V/M11	20.0V/Max 90W	7.9 x 5.4mm	IBM, Lenovo
18.5V/M12	18.5V/Max 90W	7.4 x 5.0mm	HP, Compaq



DLPT-903USB

90W AUTOMATIC UNIVERSAL AC ADAPTER FOR LAPTOP

- Input: AC 100-240V, 1.8A, 50/60Hz (Max)
- Output: DC 15-20V, 6A (Max)
- Output USB: DC 5V, 2A
- Power: 90W
- Charges for Laptop, Tablet, smart phone, Digital Camera, Mp3 & Mp4 Player
- Connector Size: 5.7"x2.7"x 0.6" (144x69x16mm)



Type	Output	Connector Size	Laptop Brand
M1	15.0V/Max 90W	6.3 x 3.0mm	Toshiba 15V/5A, 15V/6A, 15V/4A, 15V/3A
M2	16.0V/Max 90W	6.5 x 4.4mm	Sony 16V/4A, 16V/3.5A, 16V/3.3A, Toshiba 16V/3.75A, 16V/3.36A
M3	16.0V/Max 90W	5.5 x 2.5mm	IBM/Lenovo 16V/4.5A, 16V/3.5A, 16V/3.36A
M4	18.5V/Max 90W	4.8 x 1.7mm	Compaq, HP 18.5V/4.9A, 18.5V/3.5A, 18.5V/3.8A, 18.5V/4.75A
M5	19.0V/Max 90W	5.5 x 2.5mm	Acer, Compaq, Delta, HP, Fujitsu, Gateway, Toshiba, Liteon, Dell, Asus
M6	19.0V/Max 90W	5.5 x 1.7mm	Acer, Liteon 19V/4.74A, 19V/3.42A, 19V/3.16A
M7	19.0V/Max 90W	5.5 x 3.0mm	Samsung 19V/4.74A, 19V/3.15A, 19V/3.16A
M8	19.5V/Max 90W	6.5 x 4.4mm	Sony 19.5V/4.74A, 19.5V/4.1A, 19.5V/3.9A, 19.5V/3A
M9	20V/Max 90W	5.5 x 2.5mm	Lenovo, Fujitsu, Siemens 20V/3.25A, 20V/4.5A
M10	For Dell/Max 90W	7.4 x 5.0mm	Dell 19.5V/3.34A, 19.5V/4.62A optional
M11	For HP/Max 90W	7.4 x 5.0mm	HP, Compaq 18.5V/4.9A, 19V/4.74A, 18.5V/3.5A optional
M12	For Dell/Max 90W	7.4 x 5.0mm	Dell XP 19.5V/4.62A, 19.5V/3.34A, 19.5V/2.64A optional
M13	20V/Max 90W	7.9 x 5.0mm	IBM/Lenovo 20V/4.5A, 20V/3.25A optional



COMPUTER ACCESSORIES

LAPTOPS ACCESSORIES



DLPT-1201USB

AUTOMATIC UNIVERSAL CAR/HOME CHARGING (120W)
 Charge your notebook with this compact 120W Universal AC/DC Power Supply and Charger!

This charger provides up to 120 watts of power, and included 8 power tips that are compatible with most popular laptops and portable devices

120W
POWER ADAPTER



ACER

COMPAQ

DELL

HP

IBM

SONY

TOSHIBA

LENOVO

FUJITSU




CV-30USB-KT

5 DETACHABLE USB CONNECTORS,
 CAN PLUG AND PLAY PC AND MAC

- USB 3.0
- Cable type: USB 5 in 1
- Cable Length: 6' (1.8m)
- Blue Color

Connectors used for:

- A. USB A Female: Extending the length of USB Cables
- B. USB B Male: Printers, scanners, enclosure, external drives
- C. USB B Female: Connect with USB B male connector
- D. Micro B Male/Mini 10-pin Male: Cell phones, digital cameras, PDA's

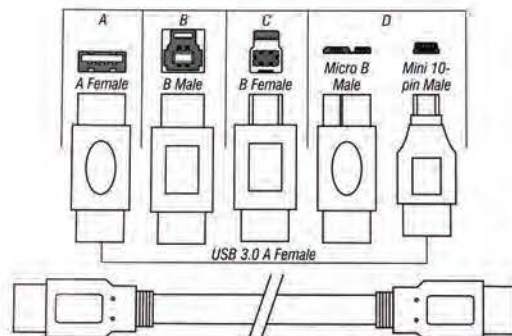

COMPUTER ACCESSORIES

ACCESSORIES



IBM-WR300N

3 IN 1 WIRELESS FUNCTION

WIRELESS REPEATER/AP ROUTER/ ROUTER

- Standards: IEEE802.11n (Draft 2.0) IEEE802.11g, IEEE802.11b
- Frequency Range: 2.4-2.4835GHz
- Wireless Transmit Power: 17-20 dBm (Typical)
- Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM
- Antenna: 2dBi Antennas
- Power Supply Unit: 100V-240V AC
- Operating temperature: 0-40°C (32-104°F)
- Storage Temperature: -40-70°C (-40-158°F)

WIRELESS REPEATER

Takes an existing signal from a wireless router and rebroadcast it to a second network

AP router

Allows wireless devices to connect to a wired network using Wi-Fi

Router

Connects data lines from different networks

300 Mbps
110V-240V



CD-116

LASER LENS CLEANER

- For conventional CD Players
- Load the cleaner into the carrier on the CD players with the side printed up
- Press "Play" to run the Cleaner
- Operate as voice guide instructs
- Restore the cleaner in its case after use



CD-128

LASER LENS CLEANER

- For conventional CD Players
- Load the cleaner into the carrier on the CD players with the side printed up
- Press "Play" to run the Cleaner
- Operate as voice guide instructs
- Restore the cleaner in its case after use



CSC-200CL

LCD SCREEN CLEANING KIT

- Powerful cleaning solution removes dust, dirt, and oily fingerprints
- Includes a high-tech reusable microfiber cloth that cleans screens Without scratching
- Cleans TVs, camcorders, camera lenses, HD monitors, and Other video displays





XCAP-2000

POWER CAPACITOR 2 FARAD

- VCD: 20 Max, 24V Surge
- ESR: 0.002 Ω or less
- Terminals: 1/4-28 Thread
- Digital Display & Status Indicator
- Digital Electronic Protection



XCAP-3500

POWER CAPACITOR 3.5 FARAD

- VDC: 20 Max, 24V Surge
- ESR: 0.002 W or less
- Terminals: 1/4 - 28 Thread
- Digital Display & Status Indicator
- Digital Electronic Protection



XTM-200

- 2 Channel IC Amplifier
- Power: 200W Max @ 4 Ω Mono
- Frequency Response: 20Hz~20KHz
- Variable Bass Boost: 0~12dB @ 45Hz
- Channel Separation: 60dB
- Signal Noise Ratio: 90dB
- Input Impedance: 22K Ω
- Input Sensitivity: 200mV~6V
- THD: <0.05%
- Dimensions: 4.3" x 5.9" x 2"(110x150x50mm)



XTM-400

- 4 Channel IC Amplifier
- Power: 400W Max @ 4 Ω Stereo
- Frequency Response: 20Hz~20KHz
- Selectable Crossover: LPF, FULL
- Channel Separation: 60dB
- Signal Noise Ratio: 90dB
- Input Impedance: 22K Ω
- Input Sensitivity: 200mV~6V
- THD: <0.05%
- Dimensions: 4.3" x 5.9" x 2"(110x150x50mm)





MC-355P

MOTORCYCLE SPEAKER WITH 3.5 MM AUX INPUT

- Speaker Impedance: 4 - 8
- Max output power: 10W
- Power Voltage: DC12V
- Scope: 87.5MHz-108MHz
- Antenna: external type/Externa
- Intermediate Frequency: 10.7MHz



TX-3000

3" 3-WAY - ABS SPEAKER BOXES

- Electroplated Midrange
- Paper Cone
- Output Power: 60Watts (P.M.P.O.)
30Watts (R.M.S)
- Woofer Magnet: (1). 8 Oz (2). 2 Oz
- Frequency Response: 110Hz - 18KHz
- Sensitivity: 88 dB / W(1M)
- Impedance: 4 Ohm
- Speakers sold by pair



XMR-605

6.5" 2-WAY WATER RESISTANT SPEAKERS

- IMPP Cone With Rubber Edge
- Magnet: 10 Oz
- Voice Coil Size: 1"
- Output Power: 350 Watts (P.M.P.O.)
175 Watts (R.M.S.)
- Frequency Response: 120Hz ~ 18kHz
- Sensitivity: 90dB/w(1M)
- Impedance: 4 Ohm



XGT-1402

4" 2-WAY IMPP

- Cone Coaxial Car Speaker
- Output Power: 100Watts (P.M.P.O.)
50Watts (R.M.S)
- Frequency Response: 80Hz~18KHz
- Sensitivity: 88dB / W(1M)
- Impedance: 4 Ohm



XGT-1502

5.25" 2-WAY IMPP

- Cone Coaxial Car Speaker
- Output Power: 200Watts (P.M.P.O.)
100Watts (R.M.S.)
- Frequency Response: 75Hz~18KHz
- Sensitivity: 88 dB / W(1M)
- Impedance : 4 Ohm



XGT-1600

6" DUAL CONE IMPP

- Cone Car Speaker
- Output Power: 150Watts (P.M.P.O.)
75Watts (R.M.S.)
- Frequency Response: 70Hz~15KHz
- Sensitivity: 89 dB / W(1M)
- Impedance : 4 Ohm



XGT-1602

6" 2-WAY IMPP

- Cone Coaxial Car Speaker
- Output Power : 300Watts (P.M.P.O.)
150Watts (R.M.S.)
- Frequency Response: 70Hz ~ 18KHz
- Sensitivity: 89 dB / W(1M)
- Impedance : 4 Ohm



XGT-1603

6" 3-WAY IMPP

- Cone Triaxial Car Speakers
- Output Power: 350Watts (P.M.P.O.)
175Watts (R.M.S.)
- Frequency Response: 70Hz ~ 18KHz
- Sensitivity: 89 dB / W(1M)
- Impedance: 4 Ohm



XGT-1605

6" DUAL CONE PAPER

- Cone Car Speaker
- Output Power : 60Watts (P.M.P.O.)
30Watts (R.M.S.)
- Frequency Response : 150Hz ~ 12KHz
- Sensitivity: 90 dB / W(1M)
- Impedance : 4 Ohm



XGT-6803

6" x 8" 3-WAY IMPP

- Cone Triaxial Car Speakers
- Output Power: 350Watts (P.M.P.O.)
175Watts (R.M.S.)
- Frequency Response: 70Hz~20KHz
- Sensitivity: 89 dB / W(1M)
- Impedance: 4 Ohm



XGT-6903

6" 3-WAY IMPP

- Cone Coaxial Car Speaker
- Output Power : 400Watts (P.M.P.O.)
200Watts (R.M.S.)
- Frequency Response: 70Hz ~ 18KHz
- Sensitivity: 89 dB / W(1M)
- Impedance : 4 Ohm



XGT-6904

6" 4-WAY IMPP

- Cone Quadaxial Car Speakers
- Output Power: 500Watts (P.M.P.O.)
250Watts (R.M.S.)
- Frequency Response: 70Hz ~ 18KHz
- Sensitivity: 89 dB / W(1M)
- Impedance: 4 Ohm



XFG-1603

6" 3-WAY IMPP

- Cone Triaxial Car Speaker
- Output Power: 300Watts (P.M.P.O.)
150Watts (R.M.S.)
- Frequency Response: 90Hz~18KHz
- Sensitivity: 86dB/W(1M)
- Impedance: 4 Ohm
- Grill and Hardware Included



XFG-6903

6"x9" 3-WAY IMPP

- Cone Triaxial Car Speaker
- Output Power: 350Watts (P.M.P.O.)
175Watts (R.M.S.)
- Frequency Response: 55Hz~18KHz
- Sensitivity: 87dB/W(1M)
- Impedance: 4 Ohm
- Grill and Hardware Included



XFG-6904

6" x 9" 4-WAY IMPP

- Cone Quad-axial Car Speaker
- Output Power: 450Watts (P.M.P.O.)
225Watts (R.M.S.)
- Frequency Response: 55Hz~18KHz
- Sensitivity: 88dB/W(1M)
- Impedance: 4 Ohm
- Grill and Hardware Included



KIC-80

- 8" WOOFERS (2 pcs.)
- 2" x 5" Piezo Tweeters (2 pcs.)
- Carpet Finish
- Impedance: 4 Ohm
- Frequency Response: 45Hz-20KHz
- Sensitivity: 88dB (1W/ 1M)
- Size: 11-3/5" x 27-1/2" x 7-1/2"
- Weight: 17.5 lbs.
- Peak Power: 250 Watt



KIC-100

- 10" WOOFERS (2 pcs.)
- 2" x 5" Piezo Tweeters (2 pcs.)
- Carpet Finish
- Impedance: 4 Ohm
- Frequency Response: 40Hz-20KHz
- Sensitivity: 89dB (1W/ 1M)
- Size: 12-3/5" x 29-1/2" x 8"
- Weight: 36 lbs.
- Peak Power: 250 Watt



KIC-120

- 12" WOOFERS (2 pcs.)
- 2" x 5" Piezo Tweeters (2 pcs.)
- Carpet Finish
- Impedance: 4 Ohm
- Frequency Response: 35Hz-20KHz
- Sensitivity: 88dB (1W/ 1M)
- Size: 15-1/8" x 33" x 8"
- Weight: 28.5 lbs.
- Peak Power: 500 Watt



CSB-69

- 6" x 9" 3 WAY SPEAKER
- with 1" Aluminum Voice Coil & 20 Oz Magnet
- Carpet Finish
- Impedance: 4 Ohm
- Frequency Response: 40Hz-20KHz
- Sensitivity: 90 dB (1W/ 1M)
- Size: 12" x 6 3/4" x 8"
- Weight: 12 lbs
- Comes in Pairs



XBX-800B

8" SUBWOOFER

- 1.5" ASV Coil
- 20 Oz Magnet
- Impedance: 4 Ohm
- Max Output Power: 800 Watts

AMPLIFIER & WIRE KIT INCLUDED



XBX-1000B

10" SUBWOOFER

- 30 Oz Magnet
- 88 dB/W(1M)
- 2 Channel Amplifier
- Max Output Power: 1000 Watts

AMPLIFIER & WIRE KIT INCLUDED



XBX-1200B

12" SUBWOOFER

- 40 Oz Magnet
- 89 dB/W(1M)
- 2 Channel Amplifier
- Max Output Power: 1200 Watts

AMPLIFIER & WIRE KIT INCLUDED



XBX-1500B

15" SUBWOOFER

- 2.5" 4-layer ASV Coil
- 50 Oz Magnet
- Impedance: 4 Ohm
- Max Output Power: 1500 Watts

AMPLIFIER & WIRE KIT INCLUDED



XTC-3300

SUPER HIGH FREQUENCY MINI TWEETER

- 500 Watts
- Sensitivity: 97 dB
- Freq. Response: 5KHz~20KHz
- Output Power: 160Watts



XTC-5500

SUPER HIGH FREQUENCY MINI TWEETER

- 500 Watts
- Sensitivity: 100 dB
- Freq. Response: 5KHz~20KHz
- Output Power: 120Watts



XTC-7700

SUPER HIGH FREQUENCY MINI TWEETER

- 600 Watts
- Sensitivity: 100 dB
- Freq. Response: 5KHz~20KHz
- Impedance: 4Ω

INCLUDES CAPACITORS

XEQ-700

SLIM MOUNT EQUALIZER

- Frequency Response: 20Hz~20KHz
- Pre Graphic Frequency: 40Hz, 200Hz, 200Hz, 2KHz, 20KHz
- Total Harmonic Distortion(TDH): 0.05%
- Signal-to-noise Ratio: >80dB
- Inputs: Switchable to Ratio or Aux
- Equalization Boost/Cut: ±12dB
- Subwoofer Crossover Frequency: Selectable 80 or 120Hz
- Channel Separation: 70dB
- Maximum Output Voltage: 9V RMS
- Power Supply: 11~15V Negative Ground
- Fuse: 1A(AGC type)
- Dimensions: Chassis 6.75" x 1.125" x 4.25"
- Mounting Depth: 4.5"(Including RCA Jacks)



AUDIODRIFT

CAR RADIOS



DEH-1450UB-AD

PLL SYNTHESIZER STEREO RADIO

- Automatic Memory Storing
- USB Interface
- SD/MMC Interface
- Auxiliary Input Function



KP-1635USB

AM/FM/USB/SD/MP3 PLAYER CAR RADIO

- Am/FM Band with 30 preset Stations
- LCD Display, Real Time Clock
- AUX Input, RCA Line Out
- Supports USB/SD Interface
- Rotary Volume control and Memory Play Function
- Pause, Replay, Scan, Random Play
- Reset Function, EQ Function



KP-1735

WMA/MP3/FM/USB/SD
PLAYER WITH RADIO RECEIVER

- Fix panel
- FM receiver
- USB/SD/MMC slot
- Esp electronic system
- Preset EQ (JAZZ/POP/ROCK/CLASS)
- 18 Preset memory (18FM)
- Last memory/Present scan
- Power output 50W x 4
- Digital clock display
- Full function remote control

MP3
CD PLAYBACK

SD
CARD
READER

USB

AUX
Front

WMA

AUDIODRIFT

SUPER TWEETER / CAR SPEAKERS



ADS-250

TWEETER PIEZOELECTRONIC

- Frequency Range: 5~20KHz
- Sensitivity: 105dB(1W/1M)
- Power: 150W Max
75W RMS
- Impedance: 4~8 Ohm
- Size: 45 x 24 mm



DS-A1073S

4" FLUSH-MOUNT CAR SPEAKER

- 3-Way IMPP Cone Car Speaker
- Output Power: 200 Watts (P.M.P.O.)
100 Watts (R.M.S.)
- Frequency Response: 75Hz - 18KHz
- Sensitivity: 88 dB/W(1)
- Impedance: 4 Ohm



DS-A1373S

FLUSH-MOUNT CAR SPEAKER

- 3-Way IMPP Cone Car Speaker
- Output Power:
200 Watts (P.M.P.O.)
100 Watts (R.M.S.)
- Frequency Response:
75Hz - 18KHz
- Sensitivity: 88 dB/W(1)
- Impedance: 4 Ohm
- 5-1/4" Coaxial 3-Way



DS-A1603

6" DUAL CONE IMPP CONE CAR SPEAKERS

- Output Power: 150 Watts (P.M.P.O.)
75 Watts (R.M.S.)
- Frequency Response: 70Hz-15KHz
- Sensitivity: 89dB/W(1M)
- Impedance: 4 Ohm

AUDIODRIFT

CAR SPEAKERS



DS-A1673S

6-1/2" COAXIAL 3-WAY FLUSH-MOUNT CAR SPEAKER

- 3-Way IMPP Cone Car Speaker
- Output Power: 350 Watts (P.M.P.O.)
175 Watts (R.M.S.)
- Frequency Response: 70Hz - 20KHz
- Sensitivity: 90 dB/W(1)
- Impedance: 4 Ohm



DS-A1683S

6-1/2" 4-WAY CONE CAR SPEAKERS

- Flush-mount car speakers
- 4-Way IMPP Cone Car Speaker
- Output Power: 350 Watts (P.M.P.O.) / 175 Watts (R.M.S.)
- Frequency Response: 70Hz - 20KHz
- Sensitivity: 90 dB/W(1)
- Impedance: 4 Ohm
- 6-1/2" Coaxial 4-Way



DS-A6873S

6"x 8" IMPP CONE TRIAXIAL CAR SPEAKERS

- 3-Way Speaker
- Output Power: 350 Watts (P.M.P.O.)
175 Watts (R.M.S.)
- Frequency Response: 70 Hz - 20 KHz
- Sensitivity: 89 dB / W(1M)
- Impedance: 4 Ohm



DS-A6993S

6 x 9" 4-WAY

- Injection Cone Woofer with Rubber Edge
- 55mm Paper Midrange and 20mm Piezo Tweeter and 13mm Piezo Tweeter
- 1" ASV Coil
- 20 Oz Magnet
- 4 Ohm Impedance
- 200W Max Power

PIPEDREAM

LIGHTING / ACCESSORIES

MLDPC-6BL (6")

MLDPC-6RD (6")

MLDPC-6WH (6")

MLDPC-12BL (12")

MLDPC-12RD (12")

MLDPC-12WH (12")

ADVANCED MARINE APPLICATION LED

- Waterproof IP 68
- 12-Volt DC Power only
- This LED Lights are polarity sensitive
- It is important the power and ground are connected properly
- Red Wire=Positive /Black Wire=Negative



MLDPC-24BL (24")

MLDPC-24RD (24")

MLDPC-24WH (24")

ADVANCED MARINE APPLICATION LED

- Waterproof IP 68
- 12-Volt DC Power only
- This LED Lights are polarity sensitive
- It is important the power and ground are connected properly
- Red Wire=Positive /Black Wire=Negative



LED-100BLU

LED SCANNER

- With 7 blue micro flashing LED's & 10 different selectable patterns.
- Super bright LEDs, long lasting shock.
- Over 100,000 hours life.
- Low power consumption, no heat build-up.
- Can be used in conjunction with your security alarm as a warning light.
- Installs with or without Car Alarm



NL-KR22M

22" SCANNING CAR LED BAR

- 48 LED's with Scanning Effect
- Length: 22" (56cm)
- Over 20 selectable Patterns
- Power cut-off Memory Function
- 7 Colors Patterns to choose from
- With Remote and Control Box

PIPEDREAM

LIGHTING / ACCESSORIES

STRB-140LED-BT

LED STROBE LIGHT

- 4 x 1W, 12V
- 4 x Ø1.3cm(0.51")LED bulbs
- 4 Kinds of flashing patterns to choose from
- Double sided tape on the back of the LED for installing purposes



STRB-720LED-BT

LED STROBE KIT

- 0.58 A
- 12-24V
- 7W
- 72 x 2 LED bulbs
- Color: White
- Be seen in hazardous locations
- Great for contractors, tow vehicles and others
- Comes with mountable controller for in car operation
- Water resistant LED housing
- For off-road use only



WHITE

STRB-960LED-BT

LED STROBE KIT

- 12V
- 7.5W
- 48 LED bulbs
- Color: White
- Be seen in hazardous locations
- Great for contractors, mail delivery and others
- Comes with mountable controller for in car operation
- Water resistant LED housing
- For off-road use only



WHITE

NL-DTRL1600

LED DAYTIME RUNNING LIGHTS


- 12-24V
- 4.8W
- Color: White
- Fully Adjustable mounting brackets
- Mounting parts included
- Uses minimum power, reduces heat



STRB-500

LED STROBE LIGHT

- 11-30VDC
- Waterproof
- 15 Flashing Patterns
- EZ-Switch Control
- Auto-Recall Function
- LED Flash Pattern Indicator
- Brightness Control Option
- Option (car alarm warning)

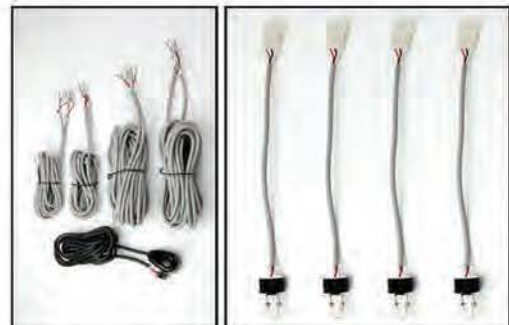

PIPEDREAM

SNAKE EYES LIGHTING



LBS-400BL

- Snake Eyes
- Easy to install
- Lights up those tight Spaces
- Blue color



LBS-400RD

- Snake Eyes
- Easy to install
- Lights up those tight Spaces
- Red color



LBS-400PR

- Snake Eyes
- Easy to install
- Lights up those tight Spaces
- Purple color



LBS-400WH-BT

- Snake Eyes
- Easy to install
- Lights up those tight Spaces
- White color



PIPEDREAM

LED TWIN RODS

6"



NL-3006MULTI-BT

7 COLOR ACCESSORY KIT FOR ALL YOUR LIGHTING NEEDS!

- Light up your: car, truck, motorcycle, room
- Colors: red, yellow, green, white, aqua, blue, purple
- Built-in memory chip to resume current setting.
- Accent your car, truck, motorcycle or boat.
- 6"

9"



NL-3009MULTI

7 COLOR ACCESSORY KIT FOR ALL YOUR LIGHTING NEEDS!

- Light up your: car, truck, motorcycle, room
- Colors: red, yellow, green, white, aqua, blue, purple
- Built-in memory chip to resume current setting.
- Accent your car, truck, motorcycle or boat.
- 9"

12"



NL-3012MULTI

7 COLOR ACCESSORY KIT FOR ALL YOUR LIGHTING NEEDS!

- Light up your: car, truck, motorcycle, room
- Colors: red, yellow, green, white, aqua, blue, purple
- Built-in memory chip to resume current setting.
- Accent your car, truck, motorcycle or boat.
- 12"



NL-3015MULTI

7 COLOR ACCESSORY KIT FOR ALL YOUR LIGHTING NEEDS!

- Light up your: car, truck, motorcycle, room
- Colors: red, yellow, green, white, aqua, blue, purple
- Built-in memory chip to resume current setting.
- Accent your car, truck, motorcycle or boat.
- 15"



15"



NL-3020MULTI-BT

7 COLOR ACCESSORY KIT FOR ALL YOUR LIGHTING NEEDS!

- Light up your: car, truck, motorcycle, room
- Colors: red, yellow, green, white, aqua, blue, purple
- Built-in memory chip to resume current setting.
- Accent your car, truck, motorcycle or boat.
- 20"



20"

PIPEDREAM

LED KITS

NL-F3648SLM

FLEXIBLE SLIMLINE MULTICOLOUR UNDERCAR LED KIT

- Add an animated LED glow to your car. Can't decide on a Colour? Why choose when this kit has 7 colours and 12 lighting sequences including sound activation model. A great kit for either the novice or professional. The kit included two 48" LED tubes and two 36" LED tubes. Transformers are built into each tube. Easily connected to trough a central distribution mount.

• Contents:

- 2 x 48" LED Tubes
- 2 x 36" LED Tubes
- 1 x LED Controller Module
- 1 x Control Board
- 1 x Remote Board
- All Mounting Hardware



2 x 36"



2 x 48"



NL-F424WK

7-COLOR LED FENDER TRIM LIGHT

- Color: 7 Colors
- Size: 24"/61cm x 4 Pcs
- Dances to the Beat of the Music
- Easy Installation
- Selectable Color
- Multiple Changing Patterns
- Illuminates the Wheel well
- Flexible



NL-7LEDX

7 COLOR ACCESSORY KIT FOR ALL YOUR LIGHTING NEEDS

- Light up your: car, truck, motorcycle, room
- Colors: red, yellow, green, white, aqua, blue, purple
- Built-in memory chip to resume current setting
- Accent your car, truck, motorcycle or boat
- Remote Control



PIPEDREAM

LED FLEXIBLE STRIPS



10"



NL-F1010CW-BL

NL-F1010CW-GR

NL-F1010CW-RD

NL-F1010CW-WH

0.7 CM WIDE, 1.25 CM HEIGHT

- Color: Blue, White & Red
- Size: 10' / 24 cm
- Can be cut to desired length
- Shows exactly where to cut. Solder spots provide contacts for attaching wires. Each one is indicated with a + sign for positive, and - for negative.
- Multiple runs together by soldering the contacts together
- Use it for underbody lighting, engine bay lighting or interior lighting.

NL-F1020CW-BL

NL-F1020CW-RD

NL-F1020CW-WH

0.7 CM WIDE, 1.25 CM HEIGHT

- Color: Blue, White & Red
- Size: 20' / 48 cm
- Can be cut to desired length
- Shows exactly where to cut. Solder spots provide contacts for attaching wires. Each one is indicated with a + sign for positive, and for negative.
- Multiple runs together by soldering the contacts together
- Use it for underbody lighting, engine bay lighting or interior lighting.



20"



NL-F1072CW-BL

NL-F1072CW-RD

NL-F1072CW-WH

CAN BE CUT TO DESIRED LENGTH

- 0.7 cm wide
- Color: Blue, White & Red
- 1.25 cm Height
- Size: 72' / 183 cm
- Use it for underbody lighting, engine bay lighting or interior lighting



72"



NL-F10 TRACK

INCLUDES: MOUNTING HARDWARE FOUR 6' PIECES

- Compatible with:
 - NL-F1010
 - NL-F1020
 - NL-F1072



PIPEDREAM

LED STRIPS


NL-K216C-BL
 NL-K216C-GR
 NL-K216C-OR
 NL-K216C-PR
 NL-K216C-RD
 NL-K216C-WH

LED STRIP KIT


- Includes hardware for four extensions
- Cuttable
- LED Qty: 60 LED s/m
- LED Type: SMD 3528
- Packing: 5 M/Roll
- Voltage: 12V DC
- Colors: blue, green, orange, purple, red and white.



16"

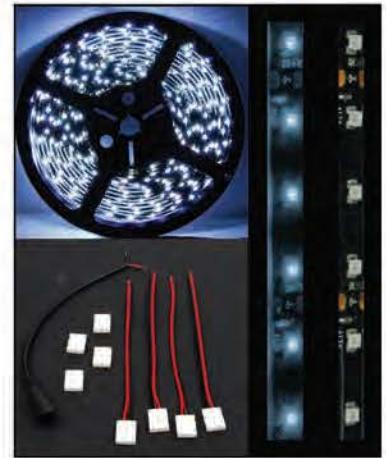

Accessories included / Accesorios Incluidos



NL-F312BL
 NL-F312RD
 NL-F312WH

HIGH INTENSITY FLEXIBLE STRIP

- 0.16" (0.4cm) width, 0.08" (0.2cm) Height
- Color: Blue / Red / White
- Size: 12"/30cm
- 12V, 220mA



12"

NL-F324BL
 NL-F324RD
 NL-F324WH

HIGH INTENSITY FLEXIBLE STRIP

- 0.16" (0.4cm) width, 0.08" (0.2cm) Height
- Color: Blue / Red / White
- Size: 24"/60cm
- 12V, 220mA



24"

- Can be cut every 3 LED's which is equivalent to 2"
- Use it for underbody lighting, engine bay lighting, or interior lighting
- Will hold up in all weather conditions, indoors or outside
- So flexible, it can achieve 90° angle bends

NL-ADPT-2A12

POWER ADAPTOR

- Compatible with all 12V LED's
- Input: 100-240VAC
- Output: DC 12V
- 2000mA Max



AC 120V
Input

DC 12V
Output

2000mA
Max



PIPEDREAM

LED FLEXIBLE STRIPS



NL-F512CB-BL
NL-F512CB-GR
NL-F512CB-OR
NL-F512CB-PR
NL-F512CB-RD
NL-F512CB-WH

- Can be cut every 3 LED's which is equivalent to 2"
- Use it for underbody lighting, engine bay lighting or interior lighting
- Flexible enough to achieve 90° angle bends
- Color: Blue, Red & White
- 1cm wide, 0.2cm height
- Size: 12" / 30cm

12"



NL-F524CB-BL
NL-F524CB-GR
NL-F524CB-OR
NL-F524CB-PR
NL-F524CB-RD
NL-F524CB-WH



- Can be cut every 3 LED's which is equivalent to 2"
- Use it for underbody lighting, engine bay lighting or interior lighting
- Flexible enough to achieve 90° angle bends
- Color: Blue, Red & White
- 1cm wide, 0.2cm height
- Size: 24" / 60cm

24"



PIPEDREAM

LED FLEXIBLE STRIPS

NL-KT116LEDM

- 7-Color LED Flexible Strip
- 0.8cm wide, 0.2cm Height
- Color: 7 Color
- Size: 16' / 480cm

EASY TO USE:

- A clearly marked line shows exactly where to cut
- 24 key super thin IR remote controller allows user to conveniently set colors and control patterns
- Create a stunning light show on your motorcycle, car, truck, boat- just about anything.



NL-KT216LEDM

- 16Ft. x 2 / 7-Color LED Flexible Strip
- 0.8cm wide, 0.2cm Height
- Color: 7 Color
- Size: 16' / 480cm

EASY TO USE:

- A clearly marked line shows exactly where to cut
- 24 key super thin IR remote controller allows user to conveniently set colors and control patterns
- Create a stunning light show on your motorcycle, car, truck, boat- just about anything.



Accesorios Incluidos

Harness

Remote



Extension

Control Box



NL-FK100R

- LED Control Remote Box
- Input: 12V
- Output: DC 12V, 3x2A



NL-FK200R

- LED (RGB) Control Box with Harness
- Compatible with most 16' RGB LED Strips
- Controls two LED strips



PIPEDREAM

LED LIGHTS

NL-M2008

- LED Light Bars (Dual)
- Durable aluminum housing
- Color: Blue
- Mounting tape included
- Lighted on/off switch
- 12V fuse protected plug



NL-MIRR-WH-BT

- LED Mirror Kit
- Includes 2 LED Strips
- Color: White
- Fits all Vehicles
- 100% Waterproof
- Cut-to-fit Design



NL-JD123

- Superbright Interior LED's
- Adaptors included to fit most Domestic and foreign Vehicles



PIPEDREAM

LIGHTS

NL-PDEQ-4511

NL-PDEQ-7016

NL-PDEQ-8019

CAR MUSIC RHYTHM LAMP

- Using the preinstalled double sided tape, remove the outer protective film and firmly press the unit onto the windshield glass
- The product is easy to install, if you have any difficulties consult with a local Car Audio authorized dealer
- Wire the power wire to 12v switch power, properly wire the ground wire to metal chassis.
- With 100% American imported crystal material allows up to 6000 hours of constant illumination
- Thin as paper the total thickness is .35mm, uniformed brightness.
- Low power consumption, under 1 milli watt per square meter.
- Soft luminous ensures no Glare or flickering of light.
- Vibrations resistant.
- Does not produce harmful rays.

Accessories Included



Remote Box


Car Charge Cable



NL-PDEQ-4511 45x11cm



NL-PDEQ-7016 70x16cm

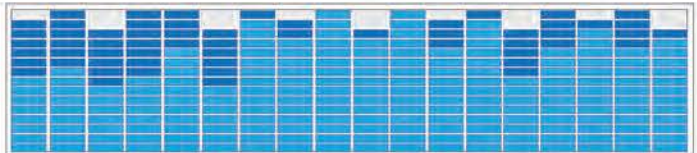

NL-PDEQ-8019 80x19cm

NLTB-TKSM (small)

TAILGATE BRAKE LIGHTS

- 4 Functions
- Running Light
- Left Signal
- Right Signal
- Brake Light
- Reverse Light
- 48"

NLTB-TKLG (large)

TAILGATE BRAKE LIGHTS

- 4 Functions
- Running Light
- Left Signal
- Right Signal
- Brake Light
- Reverse Light
- 60"



PIPEDREAM

HEAVY DUTY LED STRIPS





MLD-1200

- Marine Deck Flood Light
- Voltage: 12 to 24 VDC
- Current: 900ma @ 12VDC; 450ma @ 24VDC
- High Intensity White LED Lighting
- 80% Less Consumption than a Halogen Bulb
- Die Cast Aluminum Housing with complete mounting Hardware
- Casing is Completely Sealed IP67 Compliant



MLD-F424WK

- 7-Color LED Marine Deck Kit
- Color: 7 Color
- Size: 24" / 61cm x 4 pcs
- Easy Installation
- Selectable Color
- Multiple changing Patterns
- Illuminates your Deck or Cabin

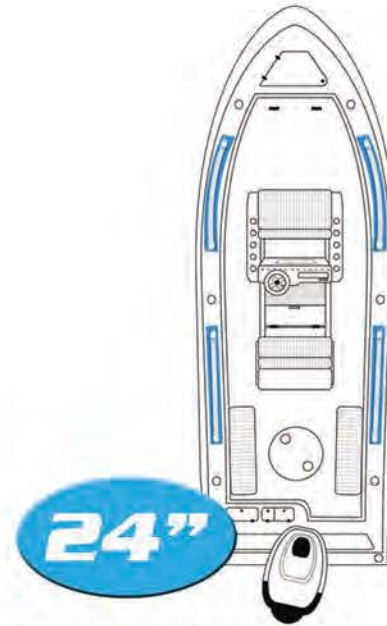

MLD-G4-06

MLD-G4-09

- LED Replacement Bulb
- Low Power Consumption
- Low Temperature
- Shock Proof
- Current-Regulated Driver Technology
- Super High Lumen Output
- Lasts Longer, Reduces Heat Saves Energy
- Replaces G4 BI-PIN Bulbs in common Low-Voltage Reading Light and Downlights



PIPEDREAM

LED STRIPS


APNL-FLX8MULTI

8 FT FLEXIBLE RGB LED STRIP

- Water resistant LED strip lights are excellent for automotive, marine, LED truck Light, RV, or battery operated lighting.
- Use Flexible LED strip lights under cabinet, under shelving, on show cars, interior, bars, coaches & party buses and so much more.
- LED strip lights are nearly invisible when OFF, are super bright and consume very little power.
- Flexible base with UV protection
- Compatible with APNL-408CNT
- Cutable every 3 LED
- Water proof socket
- Strong 3M adhesive
- 6FT Harness
- High grade Epoxy



APNL-408CNT




APNL-FLX16MULTI

16 FT FLEXIBLE RGB LED STRIP

- Water resistant LED strip lights are excellent for automotive, marine, LED truck Light, RV, or battery operated lighting.
- Use Flexible LED strip lights under cabinet, under shelving, on show cars, interior, bars, coaches & party buses and so much more.
- LED strip lights are nearly invisible when OFF, are super bright and consume very little power.
- Flexible base with UV protection
- Compatible with APNL-408CNT
- Cutable every 3 LED
- Water proof socket
- Strong 3M adhesive
- 6FT Harness
- High grade Epoxy



APNL-408CNT



APNL-408CNT

- Marine LED Light Controller
- 10 Selectable color
- Speed control
- Brightness control
- Solid, Fade function
- Sound control dances to the beat of the music
- Controls 1 -2 -3 or 4 8Ft. RGB Strips



NL-DISP-ST

- LED Display Stand
- With UL Adaptor
- With Controller Box and Remote for NL-F424WK



PIPEDREAM

LIGHTING ACCESSORIES



NLD-06

DIGITAL VOLTAGE GAUGE MOBILE

- Neon lighting Accessory
- With blue Neon Light
- Plug in Volt Outlet
- Ideal for Cars, mini Vans Trucks and more



NLD-50

DIGITAL VOLTAGE GAUGE MOBILE

- Neon lighting Accessory connected 12 Volt Outlet
- Ideal for Cars, mini Vans Trucks and more



NLD-100

DIGITAL VOLTAGE METER

- Range: 11.1~15.9V
- 3-Digit Display W/Turn-on Circuit



NLD-300CLU

VOLTAGE METER WITH USB CHARGER

- Voltage Meter: Monitor your electrical Performance
- USB Charger: 1000 mA quick Charger for Phone and portable Devices
- 12V Plug: Standard Size to work with all vehicles



NLD-300CLUBL

VOLTAGE METER WITH USB CHARGER

- Voltage Meter: Monitor your electrical Performance
- USB Charger: 1000 mA quick Charger for Phone and portable Devices
- 12V Plug: Standard Size to work with all vehicles



PIPEDREAM

LED SPEAKER RINGS




SPEAKER NOT INCLUDED

NL-RI6550BL

6.5" BLUE LED SPEAKER RINGS

- Durable Acrylic 12mm Thickness
- Dandle all outdoor weather environments
- LED's are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- Made to fit APSW-6032 6.5" coaxial marine speaker




SPEAKER NOT INCLUDED

NL-RI6550WH

6.5" WHITE LED SPEAKER RINGS

- Durable Acrylic 12mm Thickness
- Dandle all outdoor weather environments
- LED's are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- Made to fit APSW-6032 6.5" coaxial marine speaker




SPEAKER NOT INCLUDED

NL-RI7050BL

LED Speaker Rings

- Durable acrylic 12mm thickness
- Handle all outdoor weather environments
- LED's are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- Made to fit JL® audio MX770-CCX-CG-WH 7" coaxial Marine speakers



SPEAKER NOT INCLUDED

NL-RI7050WH

LED Speaker Rings

- Durable acrylic 12mm thickness
- Handle all outdoor weather environments
- LED's are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- Made to fit JL® audio MX770-CCX-CG-WH 7" coaxial Marine speakers



SPEAKER NOT INCLUDED

NL-RI8050BL

LED SPEAKER RINGS

- Durable acrylic 12mm thickness
- Handle all outdoor weather environments
- LED's are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- Made to fit APSW-8032 8" coaxial marine speakers



SPEAKER NOT INCLUDED

NL-RI8050WH

LED SPEAKER RINGS

- Durable acrylic 12mm thickness
- Handle all outdoor weather environments
- LED's are pre-mounted and ready to install
- Rings are supplied with a weather proof connector
- Outer edges are frosted for a consistent glow effect
- Made to fit APSW-8032 8" coaxial marine speakers

INSTALLATION

SWITCHES



AR-110

SPDT ON-ON MINI SLIDE SWITCH

- Current rating: 3A 125V AC
- 3 pins

This is a simple SPDT slide switch, great for use as an ON/OFF button or just as a general control switch.



AR-210

DPDT ON-ON MINI SLIDE SWITCH

- Current rating: 3A 125V AC
- 6 pins

This is a simple DPDT slide switch, great for use as an ON/OFF button or just as a general control switch.



EC-1103

110V AC ROUND ROCKER SWITCH

- Current rating: 6A 250V, 10A 125V
- For 110V applications



EC-1103ABL

110V AC ROUND ROCKER SWITCH w/B- AC Voltage Switch.

- Current rating: 6.5A 250V, 13A 125V
- For 110V applications



EC-1103ARD

110V AC ROUND ROCKER SWITCH w/AC Voltage Switch.

- Current rating: 6.5A 250V, 13A 125V
- For 110V applications



EC-1213

ROUND ROCKET SWITCH

- Mount hole: 3/4"
- Current rating: 10A 12V
- 2 pins

INSTALLATION

SWITCHES



EC-1213BL

- 12V DC ROUND ROCKER SWITCH w/BL
- Mini rocker switch with blue color LED
 - Mount hole: 3/4"
 - Current rating: 6.5A 250V, 13A 125V
 - 3 pins



EC-1213R

- 12V DC ROUND ROCKER SWITCH w/RED
- Mini rocker switch with red color LED
 - Mount hole: 3/4"
 - Current rating: 6.5A 250V, 13A 125V
 - 3 pins



EC-1215

- RED ROUND ROCKET SWITCH W/RED
- Mini rocker switch with red color LED
 - Mount hole: 3/4"
 - Current rating: 10A 12V.



EC-1217BLUE

- ROUND ROCKET SWITCH W/BLE LED
- Mini rocker switch with blue color LED
 - Mount hole: 3/4"
 - Current rating: 10A 12V



VS-1122

- VOLTAGE SWITCH
- 110/220 V



EC-2215P

- CONNECTOR (ON) & ON-OFF 10A25
- Switch 10A250V / 15A125V

INSTALLATION

SWITCHES



EC-2602

SPST ON-OFF SWITCH

- Current rating: 20A 125V AC
- 2 pins



EC-2604

DPST ON-OFF SWITCH

- Current rating: 10A 125V AC
- Mounting diameter with Red light
- 4 pins



EC-2606

DPST ON-OFF SWITCH


- Current rating: 10A 125V AC
- Mounting diameter with Red light
- 6 pins



EC-2636

DPDT ON-OFF MINI TOGGLE SWITCH

- Current rating: 3A 125V AC
- Mounting diameter with Red light
- 6 pins

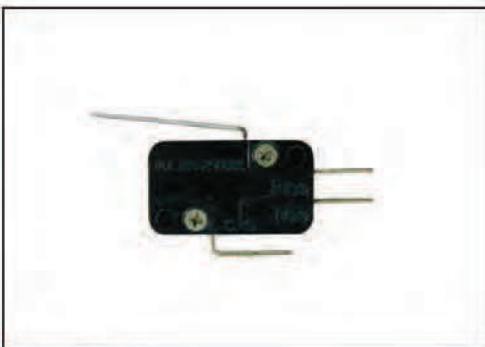

EC-284

SPDT ON-ON MICRO SWITCH

- Current rating: 10A 125V AC
- 2 pins




EC-285

MICRO SPDT ON-ON MICRO SWITCH

- Current rating: 3A 125V AC
- 3 pins

INSTALLATION

SWITCHES

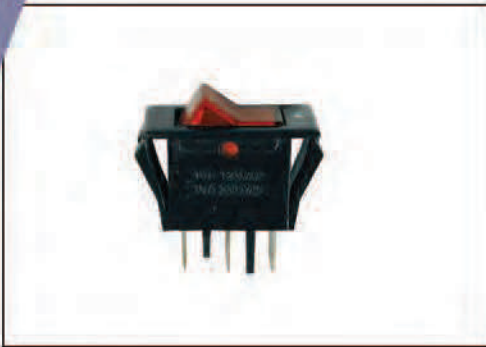

EC-315

- 3 PIN 15 AMP WITH LIGHT
- DPST on-on switch with red light
 - Current rating: 15A 125V AC
 - 3 pins



EC-620

- 6 PIN 20 AMP WITH LIGHT
- DPST on-off switch with red light
 - Current rating: 20A 125V
 - Mounting diameter
 - 6 pins



EC-623

- 3 POSITION WITH LIGHT
- DPST on-off switch with red light
 - Current rating: 20A 125V
 - 6 pins



EC-1115

- ON-OFF CONNECTOR SWITCH
- Current rating: 3A 250V, 6A125V



EC-1115PP

- ON-OFF CONNECTOR SWITCH
- CURRENT RATING: 3A 250V, 6A125V



EC-1210

- MINI ROCKER SWITCH
- MOUNT HOLE: 1/2" X 3/4"
 - CURRENT RATING: 10A 12V
 - 2 PINS

INSTALLATION

SWITCHES



EC-1220BL

MINI ROCKER SWITCH WITH BLUE COLOR LED

- Mount hole: 1/2" x 3/4"
- Current rating: 10A 12V
- 3 pins



EC-1220R

MINI ROCKER SWITCH WITH RED COLOR LED

- Mount hole: 1/2" x 3/4"
- Current rating: 10A 12V
- 3 pins



EC-1220W

MINI ROCKER SWITCH WITH WHITE COLOR LED

- Mount hole: 1/2" x 3/4"
- Current rating: 10A 12V
- 3 pins



EC-1500

TOGGLE SWITCH CENTER-OFF

- D.P.D.T. Center-Off Toggle Switch
- 117V AC
- 6 Amp
- 6 P



EC-1501

TOGGLE SWITCH CENTER-OFF

- D.P.D.T. Center-Off Toggle Switch
- 117V AC
- 3 Amp
- 6 P



EC-1502

D.P.D.T. CENTER-OFF TOGGLE SWITCH

- 117V AC
- 4 Amp
- 6 P

INSTALLATION

SWITCHES



EC-1503

D.P.D.T. CENTER-OFF TOGGLE SWITCH

- 117V AC
- 3 Amp
- 6 P



EC-1510

TOGGLE SWITCH CENTER-OFF

- D.P.D.T. Center-Off Toggle Switch
- 117V AC
- 10 Amp
- 6 P



EC-1515

TOGGLE SWITCH CENTER-OFF

- D.P.D.T. Center-Off Toggle Switch
- 117V AC
- 15 Amp
- 6 P



EC-1515P

CONNECTOR ON-OFF PULSE ON

- Current rating: 10A 250V, 15A 125V



EC-1520

TOGGLE SWITCH CENTER-OFF

- D.P.D.T. Center-Off Toggle Switch
- 117V AC
- 20 Amp
- 6 P



EC-1522

TOGGLE SWITCH CENTER-OFF

- SPST on-off toggle switch
- Current rating: 10A 250V, 20A 125V
- 2 pins

INSTALLATION

SWITCHES



EC-1523

TOGGLE SWITCH CENTER-OFF

- D.P.D.T. Center-Off Toggle Switch
- 117V AC
- 20 Amp
- 6 P



EC-1535

ON-OFF-ON TOGGLE SWITCH

- Current rating: 15A 125V AC
- 3 pins



EC-2510

SPST ON-OFF MINI TOGGLE SWITCH

- Current rating: 3A 125V AC
- 2 pins



EC-2530

SPST ON-OFF MINI TOGGLE SWITCH

- Current rating: 3A 125V AC
- 3 pins



EC-2533P

ON-OFF-(ON) CONNECTOR SWITCH

- Current rating: 1A 250V, 3A 125V
- On-off-pulse on
- 3 pins



EC-2550

DPDT ON-OFF MINI TOGGLE SWITCH

- Current rating: 3A 125V AC
- 6 pins

INSTALLATION


SWITCHES



EC-4112D

MINI SWITCH 12 x 12

- Thru mount
- Current rating: 0.1A 12V
- 4 downward pins

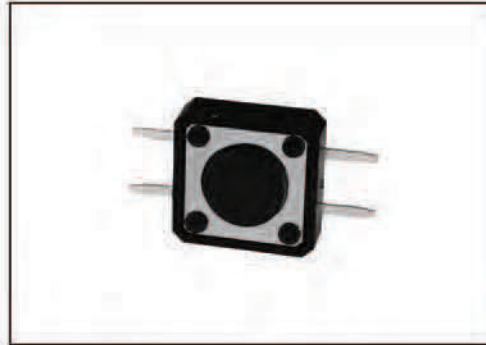

EC-4112S

MINI SWITCH 12 x 12

- Surface mount
- Current rating: 0.1A 12V
- 4 side pins



EC-126

ON-OFF SWITCH WITH 2" WIRE

- Current rating: 6A 125V
- 2 pins



PTM-52

POTENTIOMETER

- 250K
- For Electric Guitar



PTM-55

POTENTIOMETER

- 500K
- For Electric Guitar



Pilot's racing style toggle switch provides you with an extra level safety. Lift the blue cover to flip the switch on and then flip the cover down to turn it off. Works great with NOS systems, fog lights, driving lights, neon lights or any other accessory.

EPS-3015BK (Black)

EPS-3015BL (Blue)

EPS-3015CB (Carbon)

EPS-3015CH (Chrome)

EPS-3015RD (Red)



INSTALLATION

SWITCHES / RING TONGUES



NB-602PA

PUSH TO ACTIVATE BUTTON MOMENT

- Current rating: 3A 125V AC
- 2 pins



NB-602PD

PUSH TO DEACTIVATE BUTTON MOMENT

- Round
- Current rating: 3A 125V AC
- 2 pins



NB-802

PUSH BUTTON SWITCH ON-OFF

- SPST on-off mini push button switch
- Squared
- Current rating: 3A 125V AC



NB-805

PUSH SWITCH

- Current rating: 3A 125V AC
- 2 pins

PBTR-0

POWER RING TERMINALS

- 0 ga.
- Red
- Blister packing

PBTR-8

POWER RING TERMINALS

- 8 ga.
- Red
- Blister packing

PBTR-4

POWER RING TERMINALS

- 4 ga.
- Red
- Blister packing

PBTR-10

POWER RING TERMINALS

- 10 ga.
- Red
- Blister packing

PBTR-6

POWER RING TERMINALS

- 6 ga.
- Red
- Blister packing



INSTALLATION

RING TONGUES



PBTS-4

POWER SPADE TERMINAL

- Pack of 4
- 4 ga.
- Blister packing



PBTS-8

POWER SPADE TERMINAL

- Pack of 8
- 8 ga.
- Blister packing



PBTS-10

POWER SPADE TERMINAL

- Pack of 10
- 10 ga.
- Blister packing



PTR-0B

RING TONGUE TERMINAL BULK PACK

- 0 Gauge
- Black



PTR-0R

RING TONGUE TERMINAL BULK PACK

- 0 Gauge
- Red



PTR-4B

RING TONGUE TERMINAL BULK PACK

- 4 Gauge
- Black

INSTALLATION

RING TONGUES



PTR-4R

RING TONGUE TERMINAL BULK PACK

- 4 Gauge
- Red



PTR-6B

RING TONGUE TERMINAL BULK PACK

- 6 Gauge
- Black



PTR-6R

RING TONGUE TERMINAL BULK PACK

- 6 Gauge
- Red



PTR-8B

RING TONGUE TERMINAL BULK PACK

- 8 Gauge
- Black



PTR-8R

RING TONGUE TERMINAL BULK PACK

- 8 Gauge
- Red



PTR-10B

RING TONGUE TERMINAL BULK PACK

- 10 Gauge
- Black



PTR-10R

RING TONGUE TERMINAL BULK PACK

- 10 Gauge
- Red

INSTALLATION

QUICK DISCONNET



PTB-4B

FEMALE TERMINAL BULK PACK

- 4 gauge
- Crimp Connector
- Black



PTB-4R

FEMALE TERMINAL BULK PACK

- 4 gauge
- Crimp Connector
- Red



PTB-8B

FEMALE TERMINAL BULK PACK

- 8 gauge
- Crimp Connector
- Black



PTB-8R

FEMALE TERMINAL BULK PACK

- 8 gauge
- Crimp Connector
- Red



PTB-10B

FEMALE TERMINAL BULK PACK

- 10 gauge
- Crimp connector
- Black



PTB-10R

FEMALE TERMINAL BULK PACK

- 10 gauge
- Crimp connector
- Red

INSTALLATION

QUICK DISCONNECT



PTD-10B

FEMALE TERMINALS BULK PACK

- 10 gauge
- Female quick disconnect
- Black



PTD-10R

FEMALE TERMINALS BULK PACK


- 10 gauge
- Female quick disconnect
- Red



PTD-16B

FEMALE TERMINALS BULK PACK

- 16 gauge
- Female quick disconnect
- Black

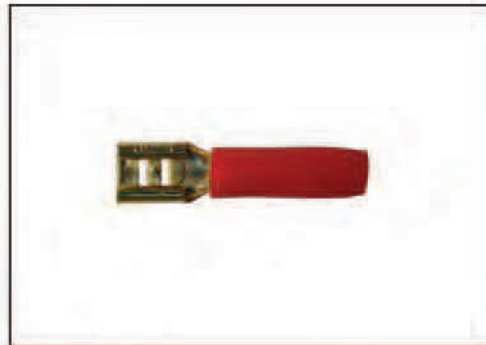

PTD-16R

FEMALE TERMINALS BULK PACK

- 16 gauge
- Female quick disconnect
- Red



PTD-18B

FEMALE TERMINALS BULK PACK

- 18 gauge
- Female quick disconnect
- Black



PTD-18R

FEMALE TERMINALS BULK PACK

- 18 gauge
- Female quick disconnect
- Red

INSTALLATION

SPADE TONGUES



PTS-4B

SPADE TERMINAL

- Bulk pack
- 4 gauge
- Black



PTS-4R

SPADE TERMINAL


- Bulk pack
- 4 gauge
- Red



PTS-6B

SPADE TERMINAL

- Bulk pack
- 6 gauge
- Black

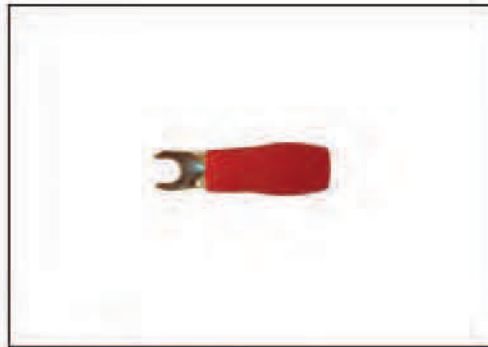

PTS-6R

SPADE TERMINAL

- Bulk pack
- 6 gauge
- Red



PTS-8B

SPADE TERMINAL

- Bulk pack
- 8 gauge
- Black



PTS-8R

SPADE TERMINAL

- Bulk pack
- 8 gauge
- Red

INSTALLATION

SPADE TONGUES / TERMINALS



PTS-10B

SPADE TERMINAL


- Bulk pack
- 10 gauge
- Black



PTS-10R

SPADE TERMINAL

- Bulk pack
- 10 gauge
- Red

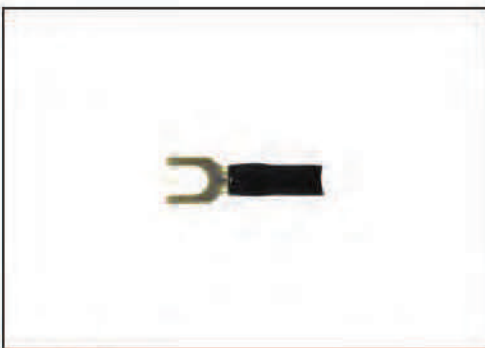

PTS-14B

SPADE TERMINAL

- Bulk pack
- 14 gauge
- Black



PTS-14R

SPADE TERMINAL

- Bulk pack
- 14 gauge
- Red



GRK-110

175 PIECE TERMINALS KIT

- Solderless terminals and connectors kit.
- Includes: spade terminals, ring terminals, male push-on, female push-on, bullet, hook, butt connector



INSTALLATION

TERMINALS



IS-BLM-1614

VINYL MALE BULLET CONNECTOR

- 16-14 gauge
- Insulated
- Blue



IS-BLM-2218

VINYL MALE BULLET CONNECTOR

- 22-18 gauge
- Insulated
- Red



IS-RT-HDC-3/8

HEAVY DUTY RING TONGUE TERMINAL

- 0 gauge
- Stud size #3/8



IS-RT-HD4-5/16

HEAVY DUTY RING TONGUE TERMINAL

- 4 gauge
- Stud size #5/16



IS-TB-2216

TERMINAL

- 1 Unit = 100pcs (Bag)

IS-BLF-1614

VINYL FEMALE BULLET CONNECTOR

- 16-14 gauge
- Insulated .156
- Blue



IS-BLF-2218

VINYL FEMALE BULLET CONNECTOR

- 22-18 gauge
- Insulated .156
- Blue



INSTALLATION

TERMINALS



IS-RT-8-1/4

VINYL RING TONGUE TERMINAL


- 8 gauge
- Stud size #1/4
- Insulated
- Red



IS-RT-8-3/8

VINYL RING TONGUE TERMINAL

- 8 gauge
- Stud size #3/8
- Insulated
- Red

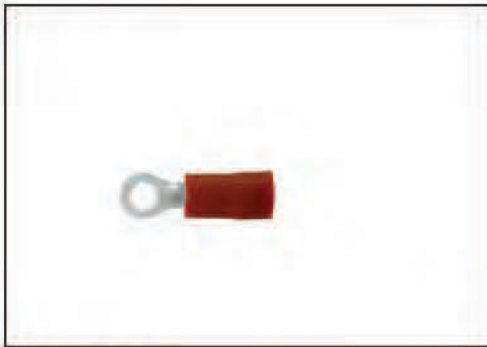

IS-RT-8-10

VINYL RING TONGUE TERMINAL

- 8 gauge
- Stud size #10
- Insulated
- Red



IS-RT-1210-1/4

VINYL RING TONGUE TERMINAL

- 12-10 gauge
- Stud size #1/4
- Insulated
- Yellow



IS-RT-1210-10

VINYL RING TONGUE TERMINAL

- 12-10 gauge
- Stud size #10
- Insulated
- Yellow



IS-RT-1210-3/8

VINYL RING TONGUE TERMINAL

- 12-10 gauge
- Stud size #3/8
- Insulated
- Yellow



IS-RT-1210-5/16

VINYL RING TONGUE TERMINAL

- 12-10 gauge
- Stud size #5/16
- Insulated
- Yellow

INSTALLATION

RING TONGUES



IS-RT-1614-1/4

VINYL RING TONGUE TERMINAL

- 16-14 gauge
- Stud size #1/4
- Insulated
- Blue



IS-RT-1614-10

VINYL RING TONGUE TERMINAL


- 16-14 gauge
- Stud size #10
- Insulated
- Blue



IS-RT-1614-3/8

VINYL RING TONGUE TERMINAL

- 16-14 gauge
- Stud size #3/8
- Insulated
- Blue

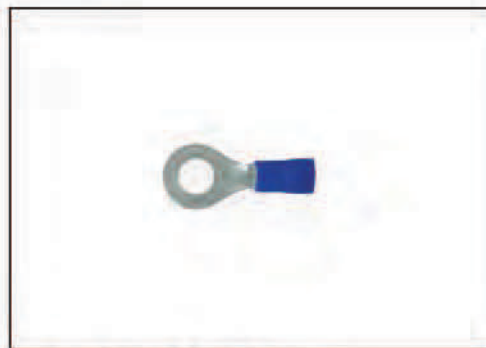

IS-RT-1614-5/16

VINYL RING TONGUE TERMINAL


- 16-14 gauge
- Stud size #5/16
- Insulated
- Blue



IS-RT-2218-1/4

VINYL RING TONGUE TERMINAL

- 22-184 gauge
- Stud size #1/4
- Insulated
- Red

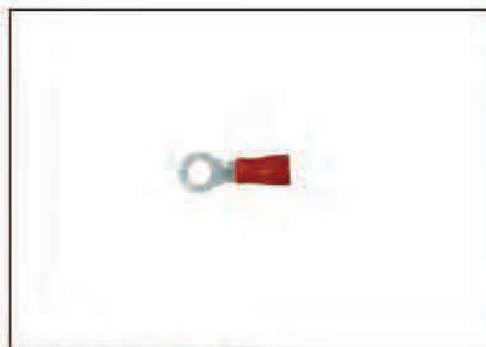

IS-RT-2218-10

VINYL RING TONGUE TERMINAL

- 22-18 gauge
- Stud size #10
- Insulated
- Red

INSTALLATION


RING TONGUES / BUTT CONNECTORS



IS-BT-4

VINYL BUTT CONNECTOR

- 4 gauge
- Insulated
- Red

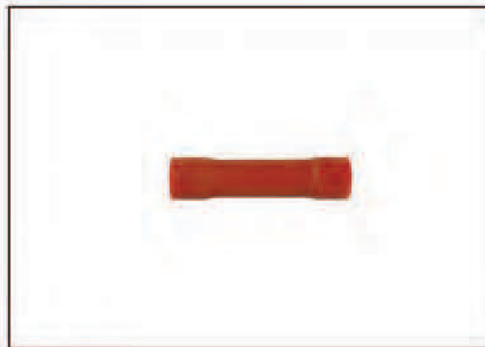

IS-BT-8

VINYL BUTT CONNECTOR

- 8 gauge
- Insulated
- Red



IS-BT-1210

VINYL BUTT CONNECTOR

- 12-10 gauge
- Insulated
- Yellow



IS-BT-1614

VINYL BUTT CONNECTOR

- 16-14 gauge
- Insulated
- Blue



IS-BT-2218

VINYL BUTT CONNECTOR

- 22-18 gauge
- Insulated
- Red



IS-SP-1210-10

VINYL SPADE TERMINAL

- 12-10 gauge
- # 10 stud size
- Insulated
- Yellow

IS-SP-1614-6

VINYL SPADE TERMINAL

- 16-14 gauge
- # 6 stud size
- Insulated
- Red



IS-SP-1614-10

VINYL SPADE TERMINAL

- 16-14 gauge
- # 10 stud size
- Insulated
- Red



INSTALLATION

TERMINALS / CONNECTORS



IS-QD-1614

VINYL RING TONGUE TERMINAL

- 22-18 gauge
- Insulated: 110
- Female quick disconnect
- Red



IS-QD-2218-110

VINYL RING TONGUE TERMINAL

- 22-18 gauge
- Insulated: 110
- Female quick disconnect
- Red



IS-QD-2218-187

VINYL RING TONGUE TERMINAL

- 22-18 gauge
- Insulated: 187
- Female quick disconnect
- Red



IS-QD-2218-250

VINYL RING TONGUE TERMINAL

- 22-18 gauge
- Insulated: 250
- Female quick disconnect
- Red

IS-BT-8NL

NYLON BUTT CONNECTOR

- 8 gauge
- Yellow
- Package of 99



IS-BT-1614NL

NYLON BUTT CONNECTOR

- 16-14 gauge
- Blue
- Package of 100



IS-BT-1210NL

NYLON BUTT CONNECTOR

- 12-10 gauge
- Yellow
- Package of 100



IS-BT-2218NL

NYLON BUTT CONNECTOR

- 22-18 gauge
- Red
- Package of 100



INSTALLATION


QUICK CONNECTORS



IS-IQF-1210NL

NYLON FEMALE CONNECTOR

- 12-10 gauge
- Full insulated .250
- Quick disconnect
- Yellow
- Package of 100

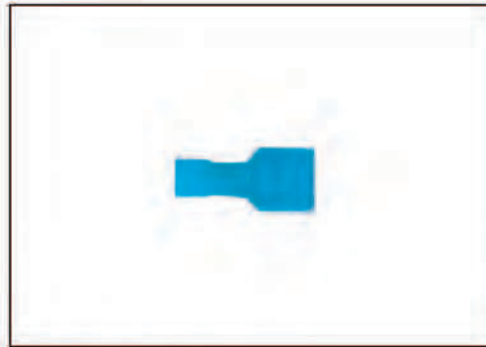

IS-IQF-1614NL

NYLON FEMALE CONNECTOR

- 16-14 gauge
- Full insulated .250
- Quick disconnect
- Blue
- Package of 100



IS-IQF-2218NL

NYLON FEMALE CONNECTOR

- 22-18 gauge
- Full insulated .250
- Quick disconnect
- Red
- Package of 100



IS-IQM-1210NL

NYLON MALE CONNECTOR


- 12-10 gauge
- Full insulated .250
- Quick disconnect
- Yellow
- Package of 100



IS-IQM-1614NL

NYLON MALE CONNECTOR

- 16-14 gauge
- Full insulated .250
- Quick disconnect
- Blue
- Package of 100

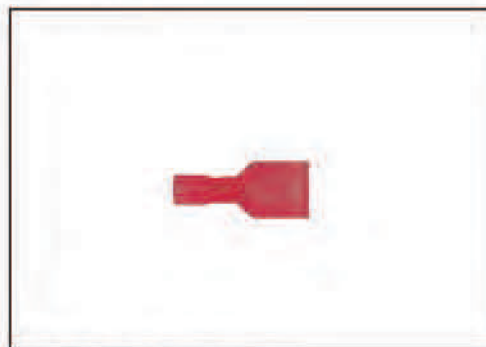

IS-IQM-2218NL

NYLON MALE CONNECTOR

- 22-18 gauge
- Full insulated .250
- Quick disconnect
- Red
- Package of 100

INSTALLATION

CRIMP CAPS / SPLICE ADAPTERS / T-TAP NYLON TERMINALS



IS-CC-2214N

NYLON CRIMP CAP

- 22-14 gauge
- Long barrel
- Natural
- Package of 100



IS-CC-2214B

NYLON CRIMP CAP

- 22-14 gauge
- Long barrel
- Black
- Package of 100



IS-CC1416

NYLON CRIMP CAP

- 14-16 gauge
- Long barrel
- Natural
- Package of 100



IS-QS-1210

QUICK SPLICE ADAPTER

- 12-10 gauge
- Yellow
- Package of 100



IS-QS-1614

QUICK SPLICE ADAPTER

- 16-14 gauge
- Blue
- Package of 100



IS-QS-2218

QUICK SPLICE ADAPTER

- 22-18 gauge
- Red
- Package of 100



IS-TT-1814

T-TAP NYLON TERMINAL


- 18-14 gauge
- Yellow
- Package of 100



IS-TT-2016

T-TAP NYLON TERMINAL

- 20-16 gauge
- Blue
- Package of 100



IS-TT-2218

T-TAP NYLON TERMINAL

- 22-18 gauge
- Red
- Package of 100

INSTALLATION

SOLDERING IRON PENS



74B30

PENCIL SOLDERING IRON

- 30W
- 110V
- 4mm diameter
- Slim design
- Radio controls, hobbies and crafts, small electrical parts.



74B55

PENCIL SOLDERING IRON

- 30W
- 110V
- 4mm diameter
- Radio controls, hobbies and crafts, small electrical parts.



74B70

PENCIL SOLDERING IRON

- 40W
- 110V
- 4m diameter
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.



74B70-60W

PENCIL SOLDERING IRON

- 60W soldering iron pen
- 110V
- 4m diameter
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.



77B20-100W

PENCIL SOLDERING IRON

- 100W industrial soldering iron pen
- 110V
- Wooden handle
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.



77B20-150W

PENCIL SOLDERING IRON

- 150W
- 110V
- Wooden handle
- Works for household electrical appliances
- This 150W Soldering Iron is ideal for soldering copper and steel.

INSTALLATION

SOLDERING IRON PENS



77B20-40W

PENCIL SOLDERING IRON

- 40W industrial soldering iron pencil
 - 110V
 - Wooden handle
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.



77B20-60W

PENCIL SOLDERING IRON

- 60W industrial soldering iron pencil
 - 110V
 - Wooden handle
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.



71B30KT

PENCIL SOLDERING IRON

- Soldering iron
- For welding a wide variety of materials
- AC operated
- For electronics and electrical applications
- Base includes security for the metallic end



74B55-220

PENCIL SOLDERING IRON

- 30W
 - 220V
 - 4mm diameter
- Radio controls, hobbies and crafts, small electrical parts



77B20-30W

PENCIL SOLDERING IRON

- 30W
 - 4mm diameter
 - Slim design
- Radio controls, hobbies and crafts, small electrical parts.3



78B40 (40Watts)

78B60 (60Watts)

78B80 (80Watts)

PENCIL SOLDERING IRON

- 110V
 - CE approved
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.

INSTALLATION

SOLDERING IRON PENS



79B20-200W

PENCIL SOLDERING IRON

- 110V
- 200 Watts
- Work for house appliances



79B21-30W

PENCIL SOLDERING IRON

- 110V
- 30 Watts
- Radio controls, hobbies and crafts, small electrical parts.



79B401-30W

PENCIL SOLDERING IRON

- 110V
- 30 Watts
- Radio controls, hobbies and crafts, small electrical parts.



79B65-30W (30 Watts)

79B65-40W (40 Watts)

79B65-60W (60 Watts)

PENCIL SOLDERING IRON

- 110V
- Slim design
- Radio controls, hobbies and crafts, small electrical parts.




79B65-40W-220V (40 Watts)

79B65-60W-220V (60 Watts)

PENCIL SOLDERING IRON

- Industrial soldering iron pen
- 220V
- Wooden handle
- Radio controls, hobbies and crafts, small electrical parts, household electrical appliances, capacitors, etc.

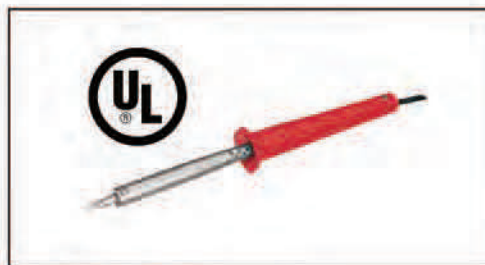

KTB30W (30 Watts)

KTB40W (40 Watts)

KTB60W (60 Watts)

PENCIL SOLDERING IRON

- 110V
- Radio controls, hobbies and crafts, small electrical parts

INSTALLATION

SOLDERING ACCESSORIES



6AS-WRST5

ANTI STATIC WRIST STRAP

- Anti-static wrist strap
- Current limiting resistor $1M\Omega \pm 5\%$
- Electro-scattering time: 0.1 sec
- Adjustable grounding
- Suitable for use in electronic repair shops



74B23 (110V)

SOLDERING HEAVY DUTY 100W

Uses Weller "closed loop" method of controlling maximum tip temperature. Portable line voltage iron - no base station required. Stainless steel modular plug-in heater, greater efficiency and versatility. Temperature is controlled by tip (600° F, 700° F, and 800° F tips) Nominal heat-up time with 700° F tip is 110 seconds



76B8-PRT

PORTABLE SOLDERING IRON

- Super fast heat-up: heats up to working temperatures in less than 15 seconds.
- Cordless for ultimate field portability
- Tip reaches up to 900°F to handle standard duty applications
- Kit includes: safety cap, lead-free solder, and tip tool



79B100SS

SOLDERING IRON STATION

- Adjustable soldering iron station 110-130V
- Variable temperature control 100°C-450°C
- Sturdy compact design
- On-off switch with power-on indicator light
- Safety guard iron holder



MAT-7400

TECHNICIANS REPAIR WORK MAT

Anti-Static Mat.
Protect your electronic devices. Transfers static charges from work surface to ground.



HH-1

DUAL HELPING HANDS

- Holds work in any position leaving hands free for soldering

INSTALLATION

SOLDERING ACCESSORIES



HH-2

SOLDERING STAND

- Acid-free
- Non-toxic cellulose tip cleaning sponge



HH-3MG

THIRD HAND TOOL WITH SOLDER STAND

- Third-hand tool with magnifying glass
- Holding clamps adjustable in many ways
- Sturdy stand




KD-100

REPLACEMENT TIP FOR NBW-100



KD-200

REPLACEMENT TIPS FOR NBW-200

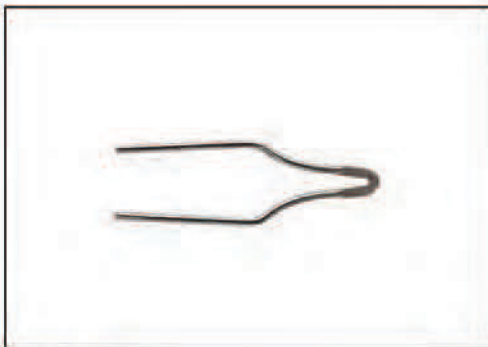

KD-33

REPLACEMENT TIP FOR 74B33



KD-40

REPLACEMENT TIP FOR NBW-74

INSTALLATION

SOLDERING ACCESSORIES



KD-50
REPLACEMENT TIP FOR NBW-50



KD-85
REPLACEMENT TIP FOR NBW-85



SP-10 (10 grams)
SOLDER PASTE 10 GRAMS
• In metal case

SP-50 (50 grams)
SOLDER PASTE 50 GRAMS
• In metal case



SP-15
SOLDER PASTE 15 GRAMS W/P



W-1
DESOLDERING WIRE 5'

40/60 1LB
60/40 1LB
• Rosin core solder wire
• 1 lb. spool
• 0.8 diameter



60/40/06
• Rosin core solder wire
• 1 lb. spool
• Ø 0.6 mm

60/40/10
• Rosin core solder wire
• 1 lb. spool
• Ø 1.0 mm

40/60 ½LB
60/40 ½LB
• Rosin core solder wire
• 1/2 lb. spool
• 0.8 diameter



60-40 1.0MM
• 60% Rosin Core
• 40% Lead
• Diameter: 1.0mm
• Net Weight: 1lb



60/40/12
• Rosin core solder wire
• 1 lb. spool
• Ø 1.2 mm



60/40 PEN
40/60 PEN
• Rosin core solder wire
• Pen type
• 0.8 diameter

INSTALLATION

CHEMICAL & CLEANER SPRAYS

402A-285G

SUPER DUSTER 134 PLUS

- 10 oz. super duster

Removes microscopic dust, lint and foreign particles. Cleans computers and keyboards, photographic and audio-video equipment, coin counters, printers timing devices, cash machines, optical equipment, fax machines and other electro mechanical instruments. High rate of flow delivery systems for increased performance.



403A-285G

SUPER COLD 134 PLUS

- 10 oz. chemical spray

- Locates thermal intermittent electrical components.
- Protects heat-sensitive components during soldering.
- Freezes gums and adhesives for easy removal.
- Chills to -51°C (-60°F). Chills to -51°C (-60°F).



407C-340G

AUDIO/VIDEO HEAD CLEANER

- 12 oz. audio/video head cleaner

- Removes nicotine, metallic oxides, carbon deposits, oils, and tape residues from magnetic and optical tape heads
- Cleans and restores sensitive magnetic and optical read/write heads. Removes nicotine, metallic oxides, oils, tape residues, carbon deposits, and dirt.



409B-140G

ELECTROSOLVE CONTACT CLEANER / ZERO RESIDUE

- 5 oz. Electrosolve contact cleaner
- Cleans connectors, contacts, LED's, PCB's, components, circuits and microprocessors

Contains isohexanes. Use when a zero residue contact cleaner is required. An effective and powerful cleaner that quickly penetrates and dissolves most soil types. For use on most electronic parts and equipment including connectors, contacts, LED's, PCB's, components, circuit breakers, tuners and microprocessors.



419C-340G

ROSIN CORED SOLDER WIRE

- 12 oz. acrylic lacquer conformal coating
- Provides an all-around protective coating for printed circuit boards against moisture, corrosion, and thermal shock
- Protects and insulates electrical and electronic components and assemblies, including generators, motors, transformers, relays, and solenoid coils
- Clear tough protective coating
- Protects against static discharge
- Service temperature limits: 105°C
- Solids by volume: 18%
- Solids by weight: 25%
- Viscosity: 50-55, 20-25 Sec.s NBR
- Easy to repair



INSTALLATION

SOLDERING ACCESSORIES



NBW-25

SMALL ECONOMY DESOLDERING SUCKER TOOL

- Plastic desoldering pump
- 8.75"
- Portable and handheld style



NBW-50

DESOLDERING SUCKER TOOL

- Plastic desoldering pump
- 7.5"
- Changeable Teflon tip



NBW-74

DESOLDERING SUCKER TOOL

- Metal desoldering pump
- 7.5"
- Changeable Teflon tip



NBW-85

LARGE DESOLDERING SUCKER TOOL

- Large desoldering pump
- 8"
- Changeable Teflon tip



NBW-100

LARGE DESOLDERING SUCKER TOOL

- 10"
- Changeable Teflon tip



NBW-200

EXTRA LARGE DESOLDERING SUCKER TOOL

- 13"
- Changeable Teflon tip

INSTALLATION

ACCESSORIES



IDCR-132

T-TAP NYLON TERMINAL

- 18-14 gauge
- Yellow
- Package of 100



IFT-600

F CONNECTOR REMOVAL TOOL LENG


- Ideal for high-volume applications
- Holds the F-connector
- Precision-machined
- 6-Inch long shaft with 7/16-Inch socket
- 3/8-Inch threaded ends hold stranded



IMPU-175

TELESCOPING 6.5

- Magnetic Pick Up Tool 6 1/2

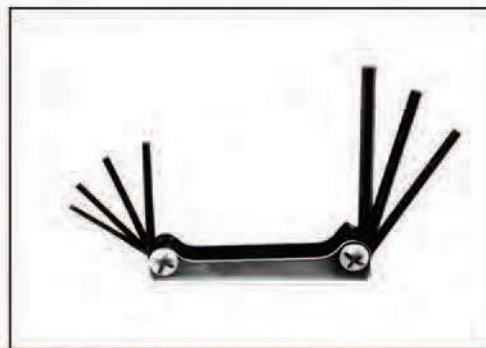

IHKM-307

FOLDING HEX KEY SET

- 7 piece folding hex key set
- 1.5, 2, 2.5, 3, 4, 5, 6mm sizes



IHKS-307

FOLDING HEX KEY SET

- 7 piece folding hex key set
- 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 7/32" sizes



IWCR-095

MANUAL WINDOW CRANK CLIP REMOVER

- Manual Window Crank Clip Remover.

INSTALLATION

ACCESSORIES



IUB-016

STEP DRILL BITS
3/16"-1/2" W/6 STEP- 3/16" - 1/2"



IUB-018

STEP DRILL BITS
• 1/8"-1/2" W/13 STEP- 1/8" - 1/2"



IUB-020

STEP DRILL BITS
• 1/4"-3/4" W/9 STEPS- 1/4" - 3/4"



TTK-012

IMPACT PUNCH DOWN TOOL
• 110 BLADE, ADJUSTABLE IMPACT WHEEL
• PUNCHDOWN TOOL



TTK-021

IMPACT PUNCH DOWN TOOL
• 110 Blade, Adjustable Impact Wheel
• Punchdown Tool



ICT-113

HEAVY DUTY CIRCUIT TESTER
• Quickly checks all 6, 12 & 24 Volts Systems
• Supplied with long 60" Cable
• Strong alligator lead Clip
• Test short / open Circuits



ICT-115LED

LED Circuit Tester
• Quickly checks all 6 & 12 Volts Systems
• Supplied with long 47" / 1.2M Cable
• Strong alligator lead Clip
• Test short / open Circuit
• With Red LED

INSTALLATION

ACCESSORIES

IS-9013

TESTING CONSOLE WITH HDMI PORT

- I/S testing console
- CB antenna cable & indicator light
- Left and right speaker
- RJ-11 phone jack
- 12V power supply
- Speaker spring connectors
- RCA jacks
- Coax connectors

For:

- Telephone, fax, and answering machines
- Video games
- Camcorders
- Televisions
- VCR's
- CB radios
- Car radios/stereos



with
HDMI PORT



NT-PHASE

SPEAKER PHASE FOR SPEAKER

• This polarity/phase tester utilizes state of the art signal processing to accurately determine absolute polarity, which is unimpaired by passive crossovers or signal waveform distortions produced by the device under test. It works with tweeters, midranges and woofers, subwoofer speakers and cabinets, plus equalizers, amplifiers, and crossovers. With this instrument, an entire speaker system can be checked in only seconds.



NT-TONEG

tone generator for testing speakers

• This compact tone generator is great for general tests and troubleshooting of virtually any audio installation including automotive, residential, and distributed commercial systems. Line level audio output is high enough to drive home theater, auto sound and pro sound inputs, and speaker level output delivers over 1W signal. Dual frequencies enhance use with all types of speaker systems.

INSTALLATION

SOLDERING ACCESSORIES



KD-55

- Replacement tip for 74B55



KD-70

- Replacement tip for 74B70



KD-KTB-60

- Replacement tip for KTB-60



KD-KTB-3040

- Replacement tip for KTB-30, KTB-40



KD-100SS

- Replacement for 79B100SS, 74B70 30W, 74B70 40W



P-654

- Replacement solder tip for 79B65-30W, 79B65-40W



P-656

- Replacement solder tip for 79B65-60W

P-1 (for 74B30)

P-840 (for 78B40)

P-720 (for 77B20)

P-860 (for 78B60)

P-750 (for 77B50)

P-880 (for 78B80)

P-795 (for 77B95)



INSTALLATION

DIGITAL MULTIMETERS



ST-5077

DIGITAL MULTIMETER

- DCV: 200m-1000V
- ACV: 200-750-1000V
- DCA: 200 μ A-10A
- OHM: 200-2000K Ohms
- Battery: 9V



ST-7575

DIGITAL MULTIMETER

- DCV: 200mV-2-20-200-1000V
- ACV: 200mV-2-20-200-700V
- DCA: 20 μ -200 μ -2m-20m
- OHM: 200-2k-20k-200k-2M
- 20M-200M Ω
- Auto power off
- Automatic over range indication
- Diode tests
- ACA: 200 μ -2m-20m-200m-2-10A

CT-5000

MULTI-FUNCTION CABLE TRACKER

- Testing coaxial cable (BNC)
- Testing 10Base-T, T568A, T568B, Token Ring
- Testing cables shield integrity
- Judge continuity of the cables or wires
- Track the cables or wires, and diagnose the break point
- Receive the tone signal on the cables or wires (telephone line)
- Identify the state in the working telephone line (clear, ringing, busy)
- Send a single solid or a dual alternating tone to the target cables or wires
- Send tone frequency: 1.5 kHz
- Receiver frequency: 100 Hz~300kHz
- Power Supply: 2x9V 6F22



CT-9100

MULTIPLE CABLE TESTER

- Enables quick convenient continuity cable testing for all types of cables.
- LED's confirm each conductor continuity of each connection
- 9-way switch for selecting connection to be tested. also includes internal battery and ground connection status checks.
- Rugged, compact, metal connections for ultimate road worthiness, long life and reliability.
- Tests cables with all types of combinations of the following connectors: USB, 6.35mm jacks, 3-pin XLR, 5-pin XLR, RCA, 3-pin DIN, 5-pin DIN, 8-pin DIN, RJ45, 4-pin Speakon, 8-pin Speakon



ITM-200X

200X USB DIGITAL MICROSCOPE VIDEO CAMERA WEBCAM

- Image sensor: 1.3 Mp (Max 5 Mp)
- Video capture resolution: 1280x1024, 640x480, 320x240, 160x120
- Still image capture resolution: 1280x1024, 640x480, 320x240, 160x120
- Color: 24bit RGB
- Lens: Dual axis 27X &100X microscope lens
- Focus range: Manual focus from 10mm to infinity
- Frequency: 50Hz/60Hz
- Frame rate: Min30f/s under 600 Lux brightness
- Magnification: 10X to 200X
- Shutter speed: 1sec. to 1/1000sec
- Video format: Avi format
- White balance and Exposure: Auto
- Light source: 4LED white lights
- PC Interface: Mini USB 1.1& 2.0



INSTALLATION

DIGITAL MULTIMETERS



ST-300

HIGH SAFETY MULTIMETER

- DCV: 0-2-20-200-500V (1M Ohms) $\pm 0.5\%$
- ACV: 0-200-500V (450K Ohms) $\pm 1.2\%$
- DCA: 200mA $\pm 2\% + 2$
- Audible continuity & diode
- Overload protection



ST-320

AUTO RANGE TESTER

- DCV: 0-4-40-400-600V (10M Ohms) $\pm 0.5\%$
- DCA: 0-40m-400mA $\pm 2\%$
- ACV: 0-4-40-400-600V (10M Ohms) $\pm 1\%$
- ACA: 0-40m-400mA $\pm 3\%$
- Audible continuity & diode
- Overload protection



ST-4300CT

DIGITAL MULTIMETER

- DCV: 200mV-1000mV $\pm (0.5\%+1)$
- ACV: 2V-750V $\pm (0.8\%+3)$
- DCA: 2mA-20A $\pm (1.0\%+5)$
- ACA: 200mA-20A $\pm (1.5\%+5)$
- OHM: 200W-20mW $\pm (0.8\%+3)$
- Continuity buzzer
- Diode test
- Transistor test



ST-4068CT

DIGITAL MULTIMETER

- DCV: 200mV-500V $\pm (0.5\% + 2)$
- ACV: 200V-500V $\pm (1.2\% + 10)$
- DCA: 2000uA-10A $\pm (1\% + 2)$
- OHM: 200W-2mW $\pm (0.8\% + 2)$
- Continuity buzzer
- Diode test
- Data hold for easy reading



ST-5308L

DIGITAL MULTIMETER

- DCV: 200mV-2-20-200-600V
- ACV: 200-600V
- DCA: 20uA-200uA-2mA-20-200mA-10A
- Resistance: 200 Ohm-2k-20k-200k-2M Ohm
- Continuity buzzer
- Diode test
- Data hold for easy reading



ST-5505

DIGITAL MULTIMETER

- DCV: 200m-2-20-200-1000V
- ACV: 2-20-200-700V
- DCA: 2m-20m-200m-20A
- ACA: 200m-20A
- OHM: 200-2K-20K-200K-2M-20M Ohm
- Large LCD display

INSTALLATION

DIGITAL MULTIMETERS



ST-9500

HIGH SAFETY DIGITAL MULTIMETER

- DCV: 0-2-20-200-500V (1M Ohms) $\pm 0.5\%$
- ACV: 0-200-500V (450K Ohms) $\pm 1.2\%$
- DCA: 1000-10A $\pm(0.8\% + 3)$
- ACA: 700-10A $\pm(0.8\% + 10)$
- Impedance: 10m Ohms
- Audible continuity & diode
- Overload protection



ST-9500TF

HIGH SAFETY DIGITAL MULTIMETER WITH TEMPERATURE SENSOR

- DCV: 0-2-20-200-500V (1M Ohms) $\pm 0.5\%$
- ACV: 0-200-500V (450K Ohms) $\pm 1.2\%$
- DCA: 1000-10A
- ACA: 700-10A
- Impedance: 10m Ohms
- Audible continuity & diode
- Overload protection



ST-902

AC VOLTAGE TESTER

- Sound and light instructions
- Adjustable sensitivity
- Setting the default sensitivity
- Wireless AC voltage tester
- Designed to international safety standard: EN61010-1/ 600V CAT III
- Battery: AAA



MUL-3333

IN-LINE CAPACITOR MULTIMETER WITH CASE

- 1-10K(MFD) capacitor measurement
- 0-50 Ohm, 66K Hz
- Battery: 1.5V



ST-CAP2000

CAPACITANCE METER

- 9 ranges from 200pF to 20mF
- High accuracy in measuring
- External knob adjustment of the zero value of the display
- Dual - slope integration A/D converter
- Safety designed test probe
- Capacitance: 200pF/2nF/20nF/200nF/2 μ F/20 μ F/200 μ F: $\pm 0.5\%$
- 2000 μ F: $\pm 1.0\%$ • 20mF: $\pm 2.0\%$
- Excitation voltage: 2.8V peak



ST-385

STANDARD CAPACITOR MULTIMETER

- DCV: 0-0.1-0.5-2.5-10-50-250-1000V
- ACV: 0-10-50-250-1000V
- DEC: -8 to +62dB
- Battery: 1.5V x 2, 9V x 1



ST-7

MINI TYPE CAPACITOR MULTIMETER

- DCV: 0-2.5-10-50-250-500V
- ACV: 0-10-50-250-500-1000V
- DEC: -10 to +25dB
- Battery: 1.5V

INSTALLATION

DIGITAL MULTIMETERS



- Data Hold
- Maximum display: 3999
- Power: 3V
- Dimension: 7.2"x1.7"x1.2"
- Weight: Approx 0.44 lb (200g, include battery)



Continuity beep



Data hold for easy reading



Test resistance



Test diode

IS-HHM-16DCL

- DCV: 0-1000V \pm (1%+1)
- ACV: 0-750V \pm (2%+3)
- DCA: 0-200A \pm (2%+3)
- ACA: 0-200A \pm (2.5%+3)
- OHM: 0-40m Ω \pm (1.5%+2)
- Continuity beep
- Frequency test
- Capacitance test
- Diode test



- Insulation test
- Data Hold
- Power: 9V



Continuity beep



Data hold for easy reading



Accurate resolution for current measurement

1999

Maximum display

IS-HHM26ACL

- Digital multimeter with AC clamp meter
- DCV: 0-1000V \pm (0.5% + 1)
- ACV: 0-750V \pm (1% + 4)
- ACA: 0-1000A \pm (2% + 5)
- OHM: 200-20K Ω \pm (2% + 2)
- Continuity beep
- Maximum display: 1999
- Does not include battery



IS-HHM53L

- DCV: 200mV-2-20-200-600V
- ACV: 200-600V
- DCA: 200 μ A-2mA-20-200mA-10A
- Resistance: 200 Ω -2k-20k-200k-2M Ω
- Transistor test
- Diode test
- Data Hold for easy reading
- Does not include battery



Test transistor



Data hold for easy reading



Test resistance



Test diode



- Diode Test
- Capacitance test
- Transistor test



Continuity beep



Test transistor



Test resistance



Test diode

IS-HHM75

- DCV: 200mV-2-20-200-1000V
- ACV: 200mV-2-20-200-700V
- DCA: 20 μ -200 μ -200m-20A
- ACA: 2m-20m-200m-2-10A
- Resistance: 200-2k-20k-200k-2M-200M Ω
- Continuity beep
- Auto power OFF
- Automatic over range indication
- Does not include battery



IS-HHM95

- Does not include battery
- Capacitance test
- Transistor test
- DCV: 0-2-20-200-1000V (1M Ω) \pm 0.5%
- ACV: 0-200m-2-20-200-750V (450K Ω) \pm 1.2%
- DCA: 2m-20m-200m-20A \pm (0.8% + 3)
- ACA: 2m-20m-200m-20A \pm (0.8% + 10)
- Impedance: 10m Ω
- Continuity beep
- Indicated over range
- Diode Test



Test capacitance



Continuity beep



Data hold for easy reading



Test resistance



Test diode



- Capacitance test
- Transistor test
- Diode Test



Test capacitance



Continuity beep



Data hold for easy reading



Test resistance



Test diode

IS-HHM95TF

- DCV: 0-2-20-200-1000V (1M Ω) \pm 0.5%
- ACV: 0-200m-2-20-200-750V (450K Ω) \pm 1.2%
- DCA: 2m-20m-200m-20A
- ACA: 2m-20m-200m-20A
- Impedance: 10m Ω
- Temperature Test: -40°C - 1000°C
- Continuity beep
- Indicated over range
- Does not include battery

INSTALLATION

DIGITAL MULTIMETERS / BULKS



IS-HHM5708

Digital auto range Multimeter

- DCV: 0-500V± (1%+2)
- ACV: 0-500V± (1%+3)
- DCA: 0-10A ± (2%+3)
- ACA: 0-10A ± (1.2%+3)
- OHM: 0-20M Ω ± (2%+3)
- Continuity beep
- Auto range & power off
- Diode Test
- Data Hold
- Maximum display: 1999
- Power: 3V



IS-HHM300

Handheld Multimeter

- DCV: 2-500V± (0.5%+1)
- ACV: 2-500V± (1.2%+10)
- DCA: 0-200mA ± (2%+2)
- OHM: 2-2000 KΩ ± (1%+2)
- Continuity beep
- Diode Test
- Power: 12V
- Dimensions: 2.8" x 4.7" x 0.7"
- Weight: Approx 0.24 lb (110 g included Battery)



- Dimensions: 4.3" x 2.4" x 0.5"
- Weight: Approx 0.13 lb (60 g included Battery)



IS-DB91832

- Damping Mat Bulk Package
- Included Nine (9) / 18" x 32" sheets
- Forget about unwanted road noise and create a quiet environment in your ride.

Pipeman's Dampening Mat is easy to install and will improve your bass.



IS-DD61224

- Door Kit Bulk Package
- Included Six (6) / 12" x 24" sheets
- Forget about unwanted road noise and create a quiet environment in your ride.

Pipeman's Dampening Mat is easy to install and will improve your bass.



IS-DS21012

- Speaker Kit Bulk Package
- Included Two (2) / 10" x 12" sheets
- Forget about unwanted road noise and create a quiet environment in your ride.

Pipeman's Dampening Mat is easy to install and will improve your bass.



IS-DT101224

- Trunk Kit Bulk Package
- Included Ten (10) / 12" x 24" sheets
- Forget about unwanted road noise and create a quiet environment in your ride.

Pipeman's Dampening Mat is easy to install and will improve your bass.



INSTALLATION

CLAMP TYPE / CRIMPING / CONNECTOR TOOLS



D-266

DIGITAL CLAMP TYPE MULTIMETER

- DCV: 1000V \pm (0.5% + 1)
- ACV: 750V \pm (1% + 4)
- ACA: 200A-1000A \pm (2% + 5)
- OHM: 200-20KW \pm (2% + 2)
- Insulation test
- Data hold



ST-310

CLAMP TYPE

- ACA: 6-15-60-150-300A
- ACV: 15-0-300-600V
- Dec: -20 to +62dB
- Battery: 1.5V x 2



KR-219S

CRIMPING TOOL

- Multi-use modular connector
- For 4P, 6P & 8P



NTK-56CMP

PROFESSIONAL WATERPROOF CONNECTORS

- Crimping tools with adjustment for crimping different length of "F", "BNC", "RCA" connectors



NTK-58

CRIMP TOOLS

- Hexagonal for all "F" connectors



NTK-59

CRIMP TOOLS

- for RG-58 & RG-59



NTK-370

MULTI GAUGE WIRE SPLICER

- with 3 stripper clamping

INSTALLATION

CRIMPING / CONNECTOR TOOLS / CABLE STRIPPERS

ICR-010

HIGH - LEVERAGE CABLE CUTTER

- Cutter length: 9.3" (237mm)
- Cuts 0 AWG copper and aluminum cable
- Dropped-forged, high-carbon steel construction



ICR-733

CRIMPING TOOL

- 245mm
- Drop forged steel blade
- Chrome vanadium



IST-106A

HIGH - LEVERAGE CABLE CUTTER

- Cutter length: 9.3" (237mm)
- Cuts 0 AWG copper and aluminum cable
- Dropped-forged, high-carbon steel construction



IWS-1626

WIRE STRIPPER

- 0.4-1.3mm / 26-16AWG



NTK-400

Automatic wire stripper

- INSUL CRIMPER: 10-22 / 0.5-6
- NON INSUL: 10-12 / 4-6 / 22-14 / 0.5-2.5
- AUTO: 7-8mm



GHT-301C

CRIMP TOOLS

- for RG-58, 59, 62 & 6



GHT-323

UNIVERSAL STRIPPER TOOL

- Stripping range: 22 AWG
- 9.5Ømm(3/8")
- For round cable, stranded wire
- Multi-conductor cable & irregular out shape cable



TTK-061

CABLE STRIPPER

- Yellow color



TTK-071

2 POSITION MODULAR CRIMPING

- Tool for 8P8C



TTK-69

ECONOMY NETWORK LAN CABLE CRIMPER

- All Steel Construction for Durability
- For Any Ethernet or Telephone Cable
- Professional tool crimps, strips and cuts cable for 8 position modular plugs
- Compact design with easy handle hand grips



TTK-725

WATERPROOF CONNECTORS

- Crimping tools with adjustment for crimping different length of "F", "BNC" and "RCA" connectors

INSTALLATION

TOOLS SET



ITK-110

11 IN 1 RATCHETING SCREWDRIVER

- Assorted Philips, slotted and torx bits
- Bits can be stored in the handle storage cap
- Philips: #00,#0,#1
- Slotted: 2mm, 2.5mm, 3mm
- Torx: T6,T7,T8,T9,T10



ITK-1200

TOOLS SET

- Tiny and slim design lets user easily work in a confined area
- Contents: 1 PP box, 1 ratchet wrench, 11 bits



ITK-3000

28 IN 1 MINI SCREWDRIVER


- Ideal for electronics
- Nickel finished for rust prevention
- Fast turning swivel caps
- Heavy duty handle made of ABS
- Blade mode of CR-V



GTK-174

PRECISION SCREWDRIVER SET

- 7 pieces



PJ-06

PRECISION SCREWDRIVER SET

- 6 pieces



PJ-11

PRECISION SCREWDRIVER SET

- 11 pieces



GSD-140

ANGLE DRIVER BIT SET

- 11 pieces



GSD-149

ANGLE DRIVER BIT SET

- 41 pieces



IUPH-700

UPHOLSTERY REMOVAL KIT

- Clear
- 7 pieces

INSTALLATION

TAPES



ET-5 (12')

ELECTRICAL TAPE

- 3/4" x 12 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Black



ET-11 (60')

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Black



ET-20 MULTI

7MIL ELECTRICAL TAPE (10 pack)

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Multi-color: red, yellow, blue, green, and white

ET-12

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Blue

ET-15

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Yellow

ET-18

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- White

ET-13

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Red

ET-16

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Brown



ET-14

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Green

ET-17

7 MIL ELECTRICAL TAPE

- 3/4" x 60 ft.
- Suitable for use up to 176°F (80°C) and 600V
- Grey

ET-1060-DST

DOUBLE SIDED FOAM TAPE

- Works on many surfaces including metal, glass and plastic.
- Holds up to 5 lbs. One inch holds a quarter pound four inches hold one pound.
- Weather resistant and highly conformable.
- Great for indoor and outdoor use.
- Make sure all surfaces are clean and dry.
- Cut 4 inches of tape for every 1 pound. Do not remove protective liner yet.
- Apply tape to back of object-press firmly on liner for good adhesive contact.
- Remove liner and press object firmly into on wall.
- 1" Double sided tape
- Length 60"



ET-1260-DST

DOUBLE SIDED FOAM TAPE

- Works on many surfaces including metal, glass and plastic.
- Holds up to 5 lbs. One inch holds a quarter pound four inches hold one pound.
- Weather resistant and highly conformable.
- Great for indoor and outdoor use.
- Make sure all surfaces are clean and dry.
- Cut 4 inches of tape for every 1 pound. Do not remove protective liner yet.
- Apply tape to back of object-press firmly on liner for good adhesive contact.
- Remove liner and press object firmly into on wall.
- 1/2" Double sided tape
- Length 60"



INSTALLATION

TECHNICIAN'S TOOLS



VLCR-1

HOOK AND LOOP FASTENING SYSTEM

- Black color
- Self-adhering
- 1 inch wide
- Nylon hooks mesh with pliable loops for fast, secure closure
- Maximum convenience - just press to close, peel to open
- Adhesive backing adheres instantly to many surfaces



VLCR-2

HOOK AND LOOP FASTENING SYSTEM

- Black color
- Self-adhering
- 2 inches wide
- 1 roll hook: 2 in x 25.4mm x 4.5m
- 1 roll loop: 2 in x 25.4mm x 4.5m
- Nylon hooks mesh with pliable loops for fast, secure closure
- Maximum convenience - just press to close, peel to open
- Adhesive backing adheres instantly to many surfaces



INSTALLATION

POLYOLEFIN HEAT SHRINK TUBING



HTSK-1612

1/4" POLYOLEFIN HEAT SHRINK TUBING (8 pieces)

- 16-12 gauge
- 2:1 shrink ratio
- I.D. shrinks 1/4" to 1/8" recovered
- Flame retardant, VW-1
- Shrink temp: 70°C (158°F)
- Operating temp: -55°C thru 125°C (-67°F thru 257°F)



HTSK-2018

3/16" POLYOLEFIN HEAT SHRINK TUBING (8 pieces)

- 20-18 gauge
- 2:1 shrink ratio
- I.D. shrinks 3/16" to 3/32" recovered
- Flame retardant, VW-1
- Shrink temp: 70°C (158°F)
- Operating temp: -55°C thru 125°C (-67°F thru 257°F)

HTSK-1612-RL100

1/4" POLYOLEFIN HEAT SHRINK TUBING

- 16-12 Ga
- 2:1 shrink ratio
- I.D. shrinks 1/4" to 1/8" recovered
- Flame retardant, VW-1
- Shrink temp: 70°C (158°F)
- Operating temp: -55°C thru 125°C (-67°F thru 257°F)
- 100 Ft. / 30.48 Meters



HTSK-2018-RL100

3/16" POLYOLEFIN HEAT SHRINK TUBING

- 20-18 Ga
- 2:1 shrink ratio
- I.D. shrinks 3/16" to 3/32" recovered
- Flame retardant, VW-1
- Shrink temp: 70°C (158°F)
- Operating temp: -55°C thru 125°C (-67°F thru 257°F)
- 100 Ft. / 30.48 Meters



HTSK-2422

1/8" POLYOLEFIN HEAT SHRINK TUBING (8 pieces)

- 24-22 gauge
- 2:1 shrink ratio
- I.D. shrinks 1/8" to 1/16" recovered
- Flame retardant, VW-1
- Shrink temp: 70°C (158°F)
- Operating temp: -55°C thru 125°C (-67°F thru 257°F)



HTSK-2826

3/32" POLYOLEFIN HEAT SHRINK TUBING (8 pieces)

- 16-12 gauge
- 2:1 shrink ratio
- I.D. shrinks 3/32" to 3/64" recovered
- Flame retardant, VW-1
- Shrink temp: 70°C (158°F)
- Operating temp: -55°C thru 125°C (-67°F thru 257°F)

INSTALLATION

CABLE TIES



IS-CT-6 (6", 18 lbs.)
 IS-CT-8 (8", 40 lbs.)
 IS-CT-10 (10", 40 lbs.)
 IS-CT-12 (12", 50 lbs.)
 IS-CT-14 (14", 50 lbs.)
 IS-CT-16 (16", 50 lbs.)
 IS-CT-18 (18", 50 lbs.)

NYLON CABLE TIES

- (100 pieces)
- White



IS-CT-4BUV (4", 18 lbs.)
 IS-CT-6BUV (6", 18 lbs.)
 IS-CT-8BUV (8", 40 lbs.)
 IS-CT-10BUV (10", 40 lbs.)
 IS-CT-12BUV (12", 40 lbs.)
 IS-CT-14BUV (14", 50 lbs.)
 IS-CT-16BUV (16", 55 lbs.)

NYLON CABLE TIES

- (100 pieces)
- UV resistant
- Black



IS-CTR-4BUV (4", 18 lbs.)
 IS-CTR-6BUV (6", 30 lbs.)
 IS-CTR-8BUV (8", 40 lbs.)
 IS-CTR-12BUV (12", 50 lbs.)

CABLE TIES WITH MOUNTING RING

- Nylon
- Black



IS-CT-518RU (5 3/4")

REUSABLE CABLE TIES

- Nylon
- Black

IS-CT-718RU (7")

REUSABLE CABLE TIES

- Nylon
- Black



LM-1-100 BLK

PROTECTIVE LOOM

- 1" Black

LM-115-100 BLK

PROTECTIVE LOOM

- 1.5" Black

LM-12-100 BLK

PROTECTIVE LOOM

- 1/2" Black

LM-34-100 BLK

PROTECTIVE LOOM

- 3/4" Black

LM-14-100 BLK

PROTECTIVE LOOM

- 1/4" Black

LM-38-100 BLK

PROTECTIVE LOOM

- 3/8" Black



CC-1

WALL FEED

- for RG-59 cable



CC-5 / CC-6

NYLON CLIPS

- for RG-6 cable

INSTALLATION

GLUE GUN ACCESSORIES



GG-833F

MINI HOT MELT GLUE GUN

- 10 watts
- 110V, 60Hz

For:

- Toys and models
- Artificial flowers
- Woodworking
- Furniture & decorations


GG-839F (Large)

LARGE HOT MELT GLUE GUN

- 80 watts
- 120V, 60Hz
- Quick, easy, versatile tool
- Electronic heating system
- Automatic trigger action
- Non-slip pad on grip

For:

- Toys and models
- Artificial flowers
- Woodworking
- Furniture & decorations

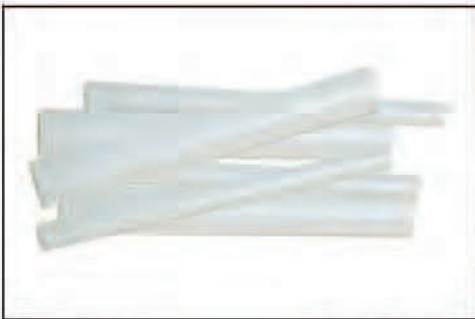

GS-610

GLUE STICKS (48 pieces)

- 1 lb.
- For GG-839 large glue gun
- 10 cm
- Diameter: 1/2"

GS-675

GLUE STICKS (135 pieces)

- 1 lb.
- For GG-833 small glue gun
- 10 cm
- Diameter: 1/4"



GS-1120BL

GLUE STICKS (6 pieces)

- 10 cm
- For large glue gun
- Diameter: 1/2"
- Blister packing



GS-720BL

GLUE STICKS (6 pieces)

- 10 cm
- Diameter: 1/4"
- Blister packing
- for Standard glue gun

INSTALLATION

BATTERY ACCESSORIES



NB-770

BATTERY JUMPER CABLE

- 70 amp
- Available in black & red



NB-880

BATTERY JUMPER CABLE

- 80 amp
- Available in black & red



NB-440B / NB-440R

BATTERY CLIP

- 30 amp
- Available in black & red



NB-550 BLK / NB-550 RED

BATTERY CLIP

- 50 amp
- Available in black & red



NB-660 BLK / NB-660 RED

BATTERY CLIP

- 60 amp
- Available in black & red



NB-2

BATTERY SNAP


- 9V



NB-415B (Black)

NB-415R (Red)

- Banana jack

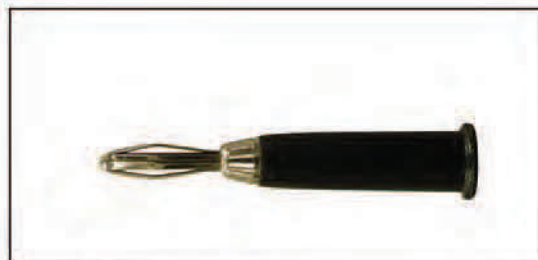


NB-416B (Black)

NB-416R (Red)

- Long handle

INSTALLATION

LEAD & CLIP ACCESSORIES

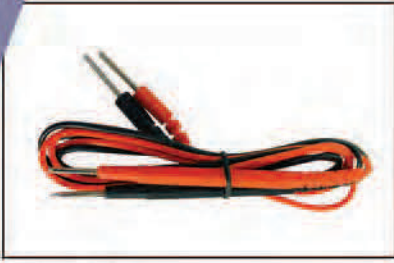

NB-409

TEST LEADS


- 3' cord with 2 pin prods on each end



NB-413

TEST LEAD SET


- 3' set includes 10 wires & 20 clips in black, green, red, white & yellow

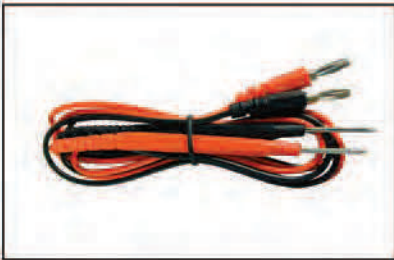

NB-414

TEST LEADS

- 3' cord with 2 pin prods on one end & 2 banana plugs on the other

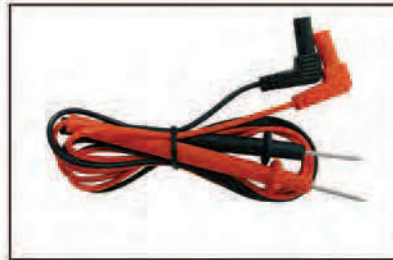

NB-425

TEST LEAD WITH PROTECTOR

- 4'
- Long tip to right angle



NB-437

TEST LEADS SET

- Flexible cable with right angle DMM plugs
- 0.08" (2mm) diameter contact tips

- Max Test Voltage: 600V/1000V
- Max Test Current: 10A



NB-341 BLACK

ALLIGATOR CLIP

- Molded handles
- Color black

NB-341 RED

ALLIGATOR CLIP

- Molded handles
- Color red

NB-343B (1")

NB-343R (1")

NB-344B (1-1/2")


NB-344R (1-1/2")

NB-345B (2")

NB-345R (2")

ALLIGATOR CLIP

- Available in black & red



NB-348B (10 Amp)

ALLIGATOR CLIP

- Available in black

NB-348B (20 Amp)

ALLIGATOR CLIP

- Available in black

NB-348B (10 Amp)

ALLIGATOR CLIP

- Available in black

NB-348R (20 Amp)

ALLIGATOR CLIP

- Available in red



INSTALLATION

SPEAKER RINGS



RING-06CBK (6")

RING-065CBK (6.5")

RING-69CBK (6x9")

RING-08CBK (8")

MDF SPEAKER RINGS WITH BLACK CARPET

- 3/4" thickness
- Sold in pairs



RING-8CTW

- 8" wood rings with curve (pair)
- Each ring accommodates 8" speakers and 1 ATR-3721 or ATQ-3725 series tweeter
- Provides a custom look to your door panel or rear deck and acts like a spacer



RING-4545

- MDF speaker rings
- Size: 4.48" x 4.48" / 3.3" x 3.3"
- Sold in pairs



RING-5757

- MDF speaker rings
- Size: 5.65" x 5.65" / 4.4" x 4.4"
- Sold in pairs


INSTALLATION

SPEAKER RINGS

RING1.5R (1.5")
RING3.5R (3.5")
RING4R (4")
RING5.25R (5.25")
RING-6.5R (6.5")
RING-8R (8")
RING-10R (10")
RING-15R (15")

MDF SPEAKER RINGS

- This product is a real time and finger saver. Don't risk it. You can router out your own MDF speaker rings but, you risk losing some skin or worse. We took the average size speakers and made these to fit most speakers on the market. Great for fiberglass kick pods and baffles.



RING-6.5BZ (6.5")
RING-8BZ (8")
RING-10BZ (10")

MDF SPEAKER RINGS

- with bezel



RING-6.5GR (6.5")
RING-8GR (8")

MDF SPEAKER RINGS

- with grill cutout



RING-3720

WOOD RING FOR TWEETERS

- $\varnothing 4.33 \times \varnothing 2.91$ "
- Sold in pairs

INSTALLATION

SPEAKER PODS

ISPOD-WD280-BLK

ISPOD-WD280-TAN

ISPOD-WD280 GREY

DUAL 8" DOOR WOOD SPEAKER POD

- Audiopipe aluminum logo badge
- Can be mounted on door panels or rear decks
- Inner cylinder provides a solid enclosure
- High grade vinyl wrap
- **SOLD BY PIECE**



ISPOD-WD6T-BLK

ISPOD-WD6T-GREY

ISPOD-WD6T-TAN

6" WOOD SPEAKER POD WITH TWEETER OPENING

- Audiopipe aluminum logo badge
- Can be mounted on door panels or rear decks
- Compatible with ATX-3725 tweeter
- Inner cylinder provides a solid enclosure
- High grade vinyl wrap
- **SOLD BY PAIRS**



ISPOD-WD8T-BLK

ISPOD-WD8T-GREY

ISPOD-WD8T-TAN

8" WOOD SPEAKER POD WITH TWEETER OPENING

- Audiopipe aluminum logo badge
- Can be mounted on door panels or rear decks
- Compatible with ATX-3725 tweeter
- Inner cylinder provides a solid enclosure
- High grade vinyl wrap
- **SOLD BY PAIRS**



ISPOD-FG6T-BLK (6.5")

ISPOD-FG8T-BLK (8")

FIBERGLASS DOOR PANEL SPEAKER POD

- Compatible with ATX-3720
- **SOLD BY PIECE**



ISPOD-WD260-BLK (black)

ISPOD-WD260-TAN (tan)

ISPOD-WD260-GREY (grey)

DUAL 6" DOOR WOOD SPEAKER POD

- Audiopipe aluminum logo badge
- Can be mounted on door panels or rear decks
- Inner cylinder provides a solid enclosure
- High grade vinyl wrap
- **SOLD BY PIECE**



TUBO-8

- 8" Subwoofer Tubo

TUBO-6.5

- 6.5" Subwoofer Tubo

TUBO-10

- 10" Subwoofer Tubo

TUBO-12

- 12" Subwoofer Tubo




INSTALLATION

ALMS

600V

- Van sliding door contact switch
 - Used to feed a power to sliding doors for central locking and car alarm installation.
- Double action sliding door switch, primarily designed for van doors and tailgates. Supplied with rubber mounting plates, screws, template stickers and installation instructions. Contacts are rated at a massive 20A @ 12V.

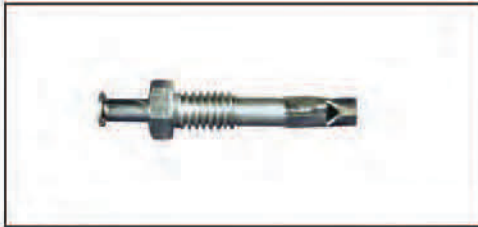


614

DOOR ALARM PIN-SHORT-

- Accepts 5-pin through 7-pin standard and interchangeable core rim cylinders.
- Saw resistant dead bolt.


Resetting the alarm can only be accomplished with a control key.

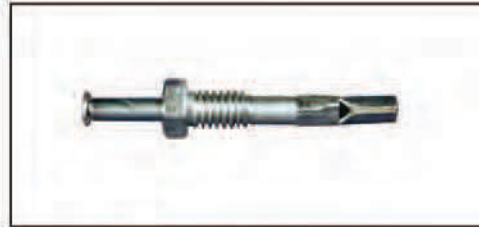

614N

LONG HOOD CAR ALARM PIN SWITCH

- Heavy-duty pin switch, with male terminal
- For door, hood and trunk car alarm auto security
- Nylon shaft for long life operation
- Spring loaded switch mounted in door, hook and trunk of the car

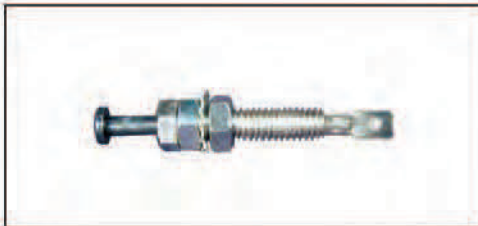

617

HEAVY DUTY ALARM PIN SWITCH

- The Code alarm is a universal pin switch that will work for most any brand of car alarms.

It can be used as a hood pin, door pin or trunk pin.



618

ADJUSTABLE METAL PIN SWITCH

- Especially good for car bonnets, this heavy duty pin switch is nickel plated for protection from corrosion in hostile environments.
- The plunger is plastic and can be cut to suit the required length/depth. Supplied with locking nuts and star washer. The bezel's mounting depth is also adjustable.



620

HEAVY DUTY ALARM PIN SWITCH

- Long hood car alarm switch

The Code alarm is a universal pin switch that will work for most any brand of car alarms. It can be used as a hood pin, door pin, or trunk pin.




621

- Cuttable plastic pin switch

INSTALLATION


ACTUATOR ACCESSORIES

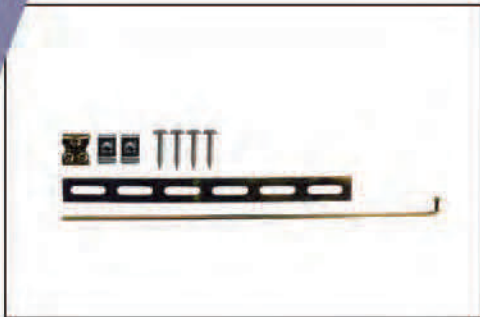

CDLS-100R

CENTRAL DOOR LOCKING SYSTEM

- 2 wires gun type actuators
- With 360-degree rotation head for easy installation
- Working force $\geq 2.5\text{Kg}$
- Working stroke: 19mm
- Working life > 100000 times
- Strong iron back strap
- Iron fixed block
- Pull rod

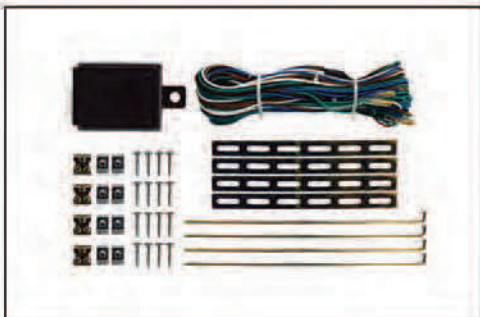

- With 1 piece 5 wire gun type actuators
- With 3 piece 2 wire gun type actuators
- With 360-degree rotation head for easy installation
- Working force $\geq 2.5\text{Kg}$
- Working stroke: 19mm
- Working life > 100000 times
- Strong iron back strap
- Iron fixed block
- Pull rod



CDLS-400R

CENTRAL DOOR LOCKING SYSTEM

- Applicable for all cars (4 door) and can be connected
- With remote controller and alarm security



CDLS-500R

5 WIRE GUN TYPE ACTUATOR

- With 360-degree rotating head for easy installation
- Working force $\geq 2.5\text{Kg}$
- Working stroke: 19mm
- Working life > 100000 times
- Strong iron back strap
- Iron fixed block
- Pull rod



CDLS-MD5

ACTUATOR MODULE

- For auto lock



ISO-RM

DELAY OUTPUT CONTROLLER

- Operating voltage: 12V



ISO-UT7


CHANNEL DELAY SWITCH CONTROLLER

- Negative trigger module




INSTALLATION


CAR SECURITY

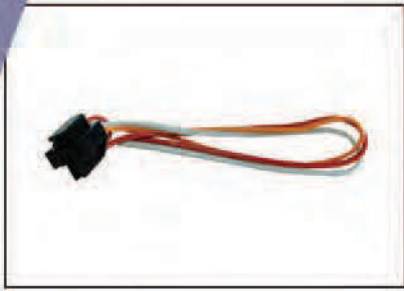


PRO-1000
RELAY SOCKET
• with diode

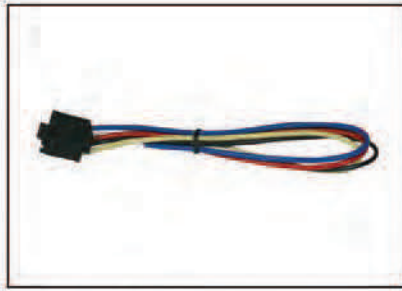

PRO-1005
RELAY SOCKET
• 5 wire

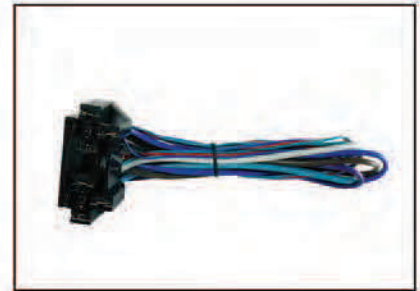


PRO-1020
RELAY SOCKET
• Dual

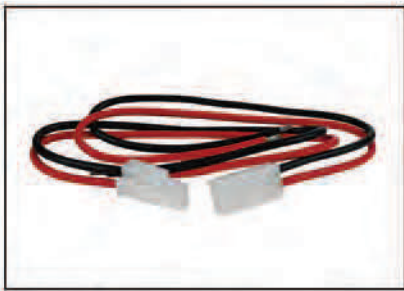


AQK-P14FM
MALE/FEMALE TERMINAL
• 14 gauge
• 2'
• Security lock




40ISR
• Relay socket
• Current: 40A

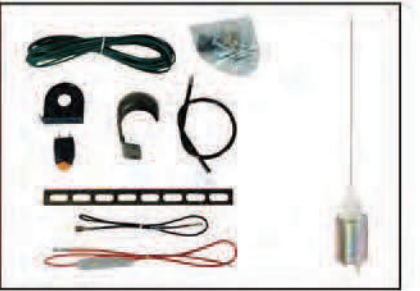

PRO-1070
TRUNK RELEASE ACTUATOR
• Operating voltage: 12V DC
• Operating temp.: -30 deg. C - +70 deg. C
• Weight: 200g

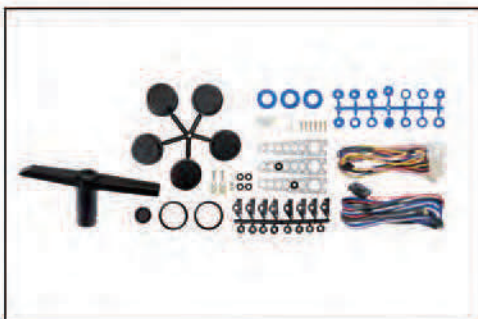

PROW-2002
UNIVERSAL POWER WINDOWS
• with 3 switches (2 window power window kit)
• Complete kit to convert 2 manual windows to full power
• Power window system
• Installed behind the door panel
• Cuprum bearing
• POM plastic gear wheel

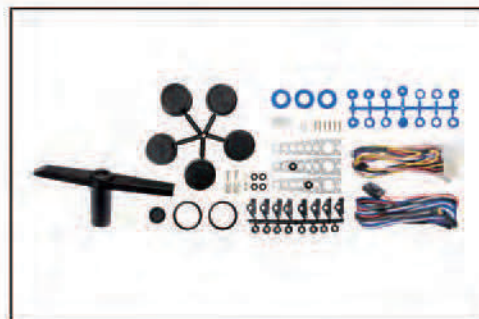

PROW-4004
DELUXE UNIVERSAL POWER WINDOWS
• with 7 switches (4 window power window kit)
• Complete kit to convert 4 manual windows to full power
• Power window system is installed behind the door panel
• Cuprum bearing
• POM plastic gear wheel



INSTALLATION

AIR COMPRESSORS



AT-1500CL

HEAVY DUTY AIR COMPRESSOR

- DC 12V, 14A 150W
- Max Pressure: 150PSI
- 2.3' Hose
- 10' Cord
- LED Light
- Nozzle Adapters included

This compact, portable high volume air compressor fills tires in three minutes or less and works on quad tires, utility trailer tires, 80 lb. RV tires and standard car tires - also on sports equipment! The high volume air compressor performs exceptionally well in cold weather and is great for off-road use. This air compressor is uniquely designed with a rugged, sled-type base to prevent contamination from dust and dirt.



150Watt
Max



AT-1800L

HEAVY DUTY AIR COMPRESSOR

- DC 12V, 15A 180W
- Max Pressure: 150PSI
- 2.3' Hose
- 10' Cord
- LED Light
- Nozzle Adapters included

This compact, portable high volume air compressor fills tires in three minutes or less and works on quad tires, utility trailer tires, 80 lb. RV tires and standard car tires - also on sports equipment! The high volume air compressor performs exceptionally well in cold weather and is great for off-road use. This air compressor is uniquely designed with a rugged, sled-type base to prevent contamination from dust and dirt.



180Watt
Max

INSTALLATION

HORN / AIR COMPRESSORS

THSY-1000

COMPRESSOR AND HORN KIT

- DC 12V, 26.5A, 320W
- Material: Zinc Alloy totally 2 horns + Aluminum Base
- Size: 168 x Φ 75mm, 207 x Φ 76mm
- Weight: 0.95 Kgs
- 110 \pm 5dB



THSY-1075-EC

HORN

- Material: Zinc Alloy totally horns + Chromed Plastic Base,
- Smaller than THSY-1075H
- Size: 230*93mm, 306*96mm, 350*96mm, 375*96mm
- 12V/24V, JGK-505 big VALVE (with copper coil)
- Weight: 1.5 Kgs
- 125 DB
- 290/421/548/648 HZ



THSY-1075H

HORN

- Air pressure: 0.4~0.8MPa
- Current: 3.5-7.0A
- Voltage: 12-24V
- Sound level: 125 \pm 5dB



THSY-HSE7

REPLACEMENT COMPRESSOR HOSE

- 7FT.
- COMPATIBLE WITH:
THSY-1075-HA
THSY-1075H
THSY-3075C
THSY-5150C



THSY-1075-H4

HORN

- Material: Zinc Alloy totally 4 horns:
- 2 small horn: length: 280mm, diameter of the mount 160mm
- 1 media horn: length: 344mm, diameter of the mount 160mm
- 1 large horn: length: 396mm, diameter of the mount 160mm
- 12V/24V, JGK-505VALVE (with copper coil)
- Weight: 6 Kgs
- 125 DB
- 290/421/548/648 HZ



THSY-3075KIT

AIR HORN COMPRESSOR MOTOR REPAIR KIT

- Replacement for THSY-3075C

3/4 Gallon



THSY-5150C

AIR HORN COMPRESSOR


- Pressure: 90~120 PSL
- Output: 12V DC
- Volume: 6L (1.59 gal)

3-1/2 Gallon



INSTALLATION

AIR COMPRESSORS / ACCESSORIES

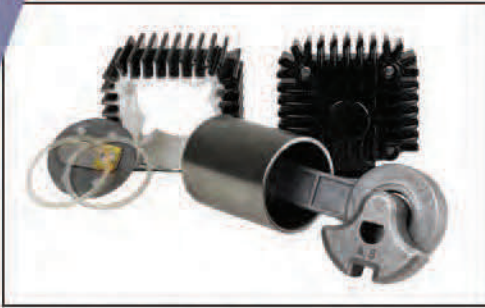

THSY-3075KIT

AIR HORN COMPRESSOR

- Air horn compressor motor repair kit
- Replacement for THSY-3075C
- 3/4 gallon



THSY-5150KIT

AIR HORN COMPRESSOR

- Motor repair kit
- Replacement for THSY-5150C



THSY-GAUGE

COMPRESSOR GAUGE

- Replacement Gauge For: THSY-3075C and THSY-5150C



THSY-HOSE 25

COMPRESSOR AIR HOSE

- Length: 25' (7.5M)
- 1/4" ends terminal made of iron, High pressure resistant
- Compatible with THSY-3075C & THSY-5150C



THSY-HSOLE

REPLACEMENT HORN SOLENOID

- Voltage: 12V/24V
- Current: 3.6A
- Power: 48W
- Air pressure range: 0.2~0.8 MPa



THSY-VALVE

REPLACEMENT HORN SOLENOID

- Replacement solenoid for THSY-3075C & THSY-5150C

INSTALLATION

CAR AUDIO ANTENNAS

AN-5

GUTTER MOUNT 4 POSITION ANTENNA

- Fits all cars
- Single 28" stainless steel mast
- 125" cable



NA-1500

PILLAR SIDE MOUNT ANTENNA

- 3 sections
- Extends to 47.2"
- Cable: 50"
- Fits most Nissan and Toyota pick-up trucks
- Silver finish



NA-1500B

PILLAR SIDE MOUNT ANTENNA

- 3 sections
- Extends to 48"
- Cable: 48"
- Fits most cars
- Black finish



NA-1502

FRONT/REAR FENDER/ROOF MOUNT ANTENNA

- 3 sections
- Extends to 47"
- Cable: 54"
- Fits most cars
- Flexible spring and deluxe ball base



NA-1508

FRONT/REAR FENDER/ROOF MOUNT ANTENNA

- 1 section
- Extends to 17"
- Cable: 54"
- Fits most cars
- Swivel ball base 180° adjustable angle



F-21A

3 SECTION RADIO ANTENNA

- 11" knocked down
- 30" extended

F-21B

4 SECTION RADIO ANTENNA

- 8" knocked down
- 24" extended

F-21C

4 SECTION RADIO ANTENNA

- 11" knocked down
- 37" extended



INSTALLATION

CAR AUDIO ANTENNAS

NA-1510

TRUNK LID MOUNT ANTENNA

- 1 section
- Extends to 32"
- Cable: 120"
- Heavy duty spring and base loaded



NA-1514

NARROW FENDER MOUNT ANTENNA

- 4 sections
- Extends to 39"
- Cable: 48"
- Fits VW beetle, Bus and transporter
Audi Auant, Citroen CX, Peugeot
104/204/304/404, Renault 12, Toyota Starlet
- 52° fixed angle



NA-1517L

PILLAR SIDE MOUNT ANTENNA

- 3 sections
- Extends to 48"
- Cable: 48"
- Fits Toyota Corolla ('78-'83), Tercel
'80-'82), and Mazda GLC ('76-'80)



NA-1517R

PILLAR RIGHT SIDE MOUNT ANTENNA

- 3 sections
- Extends to 48"
- Cable: 48"
- Fits Toyota Corolla ('78-'83),
Tercel ('80-'82), and Mazda GLC ('76-'80)



NA-1518

LEFT HAND SIDE ANTENNA

- 2 sections
- Extends to 31"
- Cable: 82"
- Fits Nissan/Datsun, GLC ('78-'80),
626 ('78-'87) Ford Festival ('87-'93)



NA-1523

UNIVERSAL FRONT OR REAR DECK ANTENNA

- 1 section spring whip
- Extends to 17"
- Cable: 54"



INSTALLATION

CAR AUDIO ANTENNAS

NA-1524

UNIVERSAL FRONT OR REAR DECK ANTENNA

- 1 section spring whip
- Extends to 31"
- Cable: 54"



NA-1532

UNIVERSAL FRONT OR REAR DECK ANTENNA

- 3 sections
- Flexible spring and deluxe ball base
- Spring base booster type
- Adjustable to 180° angle
- Extends to 45"
- Cable: 54"



NA-1533

UNIVERSAL ANTENNA

- Fits Toyota Corolla ('93 & up)
- 1 section
- Extends to 31"
- Cable: 82"



NA-1549

WINDSCREEN CAR ANTENNA

- High sensitivity
- AM/FM reception



NA-1551

LEFT/RIGHT PILL CAR ANTENNA

- Left/right pill mount antenna
- 3 sections
- Extends to 31"
- Cable: 82"
- Fits Daihatsu Charade G100, Honda Accord ('88)P prelude ('88), Mazda 323 4 door ('86), Suzuki Swift ('92), Toyota Corolla Seca ('88-'92)



NA-1553

UNIVERSAL ANTENNA

- Fits Nissan, Datsun pick-up ('89 & up)
- 1 section
- Extends to 31"
- Cable: 54"



INSTALLATION

CAR AUDIO ANTENNAS

NA-1560

STICK-ON ROOF MOUNT ANTENNA

- 1 section fiberglass mast
- Extends to 16"



NA-25215

SINGLE MIRROR MOUNT ANTENNA

- 1 section fiberglass mount
- Extends to 48"
- Cable: 140"
- Frequency: 27MHz



NA-26280

NA-26280CH

MAGNETIC MOUNT CAR ANTENNA

- Base loaded
- 1 section
- Extends to 15"
- Cable: 120"
- Frequency: 27MHz



NA-5000

UNIVERSAL STAINLESS STEEL ANTENNA

- 4 sections
- Side key lock
- 0 ~ 30° mounting angle big fit-head
- Extends to 39.4"
- Cable: 50"



NA-50FL

FENDER MOUNT ANTENNA

- 5 sections
- Material: SUS304
- Working principle: PCB control
- Coaxial cable: 75 ohms
- Length: 1500mm (59")
- Rod Length: 800mm (31.5")
- Connector: Motorola plug
- 0-30° adjustable mounting base



NA-50FL-MAST

REPLACEMENT MAST FOR NA-50FL

- 5 sections
- Length: 800mm (31.5")



INSTALLATION

CAR AUDIO ANTENNAS

NA-522

ROOF OR REAR DECK MOUNT ANTENNA

- 1 section fiberglass mast
- Mast length 405mm (16")
- Cable length 1270mm(50")
- Fits VW, Golf, Jetta and most European cars



NA-523

UNIVERSAL ROOF OR REAR DECK MOUNT ANTENNA

- 1 section black fiberglass mast
- Mast length 510mm (20")
- Cable length 2030mm (80")
- Alloy ball base adjustable angle 90°
- Side mount



NA-70FL

FULL AUTOMATIC FENDER MOUNT

- 5 Section
- Extended Length: 39"
- Under fender length 13"
- Detachable cable 55"
- Powerful 8-pole motor
- Dependable clutch and limiter switch
- Operating voltage 12V



NA-90FL

FENDER MOUNT ANTENNA

- 5 sections
- Material: SUS304
- Working principle: PCB control
- Coaxial cable: 75 ohms
- Length: 1500mm (59")
- Rod length: 800mm (31.5")
- Connector: Motorola plug
- 0-30° adjustable mounting base



NA-90FL-MAST

REPLACEMENT MAST FOR NA-90FL

- 5 sections
- Length: 1000mm (31.5")



IS-NE22

UNIVERSAL ROOF, FRONT OR REAR MOUNT ANTENNA

- 1 section flexible rubber mast
- Swivel ball base 180° adjustable angle
- Extends to 16"
- Cable: 54"



SA-111

ANTENNA REPLACEMENT MAST

- 1 section
- Universal WIP
- 31" extended
- Adaptor kit for perfect installation



INSTALLATION

CAR AUDIO ANTENNAS ACCESSORIES



CB-10MAG

- Magnet mount adapter
- Center loaded
- 40 channel



CL-15MAG

- High sensitivity cellular antenna.
- Magnet Roof Mount.



IS-CR-16

- Factory antenna to after-market radio adapters for Chrysler



CR-27

- Factory radio to after-market antenna adapters for Ford



VW-16

- Factory antenna to after-market radio adapters for VW



VW-16P

- Antenna adapter plug for VW

INSTALLATION

SWITCHES

IS-CF512

- 5" cross flow cooling fan
- Compatible with all 12 volt systems
- Comes equipped with mounting tabs for simple installation
- Low profile cross flow design allows installation in tight fitting spaces
- Puts out 40 cubic feet of air flow per minute

IS-CF812

- 8" cross flow cooling fan
- Compatible with all 12 volt systems
- Comes equipped with mounting tabs for simple installation
- Low profile cross flow design allows installation in tight fitting spaces
- Puts out 40 cubic feet of air flow per minute



IS-210

- Ground loop insulator
- 2-CH signal output
- Signal noise eliminator



IS-N2C

- IN-LINE AGU FUSE HOLDER
- Clear Housing with Mounting Base
- 24 Kt Finish Fuse Holder
- Water Resistant
- Perfect Fit for 8 or 4 Gauge Power Cable
- Accepts AGU Fuse up to 80 Amps
- Connect Base is Precision Machined



IS-NR100

- Line output converter
- High/low level converter
- Signal noise eliminator
- 2-CH signal outputs
- Output level adjustable



IS-NR35

- Line output converter
- High/low level converter
- Signal noise eliminator
- 2-CH signal outputs



IS-MVA4

- One RCA video input
- Four RCA video output
- Video input level: 2.0Vpp
- Output impedance: 75 Ohm
- Independent video level control



IS-POP10

- Pop stopper
- Time delay circuit eliminates "turn-on Pops"
- Time delay circuit eliminates "turn-off Pops"

INSTALLATION

CAR AUDIO ANTENNAS / ACCESSORIES



EA-1

- Standard male antenna plug



EA-1.5 (1.5')

EA-3 (3')

EA-6 (6')

EA-12 (12')

EA-18 (18')

- Antenna extension cord




EU-12

- Antenna adapter for BMW and Volkswagen 2002-2007
- Factory antenna to after-market radio adapters for European



EU-22

- Antenna adapter for BMW and Volkswagen 2002-2008
- Factory radio to after-market antenna adapters for European

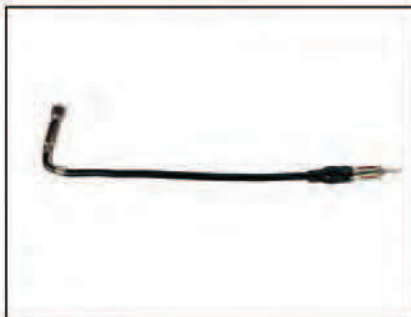

FD-16

- Factory radio to after-market antenna adapters for Ford



GM-16

- Factory antenna to after-market radio adapters for GM




GM-27

- Factory radio to after-market antenna adapters for GM



NI-16

- Antenna adapter
- For Nissans 2006 & up

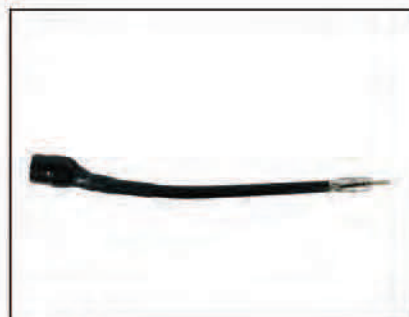

NI-19

- Factory antenna to after-market radio adapters for Nissan

INSTALLATION

ACCESSORIES

NST-012B (1/2")

NST-034B (3/4")

- Black self-tap truss head screw (1000 pieces)



NST-012S (1/2")

NST-034S (3/4")

- Silver self-tap truss head screw (1000 pieces)



NSCP-012 (1/2")

NSCP-034 (3/4")

NSCP-01 (1")

NSCP-02 (2")

- Medium thread Pan head screw



NSCW-012 (1/2")

NSCW-034 (3/4")

NSCW-01 (1")

NSCW-02 (2")

- Deep thread Wafer head screw



IS-SPG25

- 2500PSI
- Super High Strength



SC-104

- CD/MD/MP3 cassette adapter

IS-KEY9

- I.S. 9 Pairs Kit OEM radio removal keys

IS-KEY10

- I.S. 10 Pairs Kit OEM radio removal keys



INSTALLATION

TNT PRODUCTS LINE



TNT-SC10

RETRACTABLE SAFETY SCRAPER

- Intermediate blade position keeps the blade from sliding out while in use.
- Removes old window tinting film or adhesives from Glass, tile, wall or other smooth surfaces.
- Blade retracts for safe storage.
- Uses standard single edge razor blades.



TNT-SC1050-SB

REPLACEMENT BLADE

- for TNT-SC10

TNT-KN12

AUTO-LOCK UTILITY KNIFE

- Sleek, light weight stainless steel handle.
- Slide lock for convenient one hand operation.
- Use safety goggles
- Retract the blade after each use
- Dispose of use blade segment properly
- Keep out of reach of children



TNT-KN1210-SB

STAINLESS STEEL BLADE

- Replacement for TNT-KN12

9 mm
Blade Wide

9 mm, **10** pcs
Blade Wide, Pcs

TNT-BAG

HANDY TOOL STORAGE

- 12 Pocket
- Toughwear Handyman's
- Designed For Tool Storage
- Front Pocket Easily Fits Most Tapes,
- 1" Web Belt With Quick Release Buckle For Easy Fit.



INSTALLATION

TNT PRODUCTS LINE



TNT-SQ11M

- Hard credit card squeegee

TNT-SPP42

- Pressurized water pump sprayer
- 42 oz.



TNT-SQ35H (3.5")

- Small power squeegee



TNT-SQ55 (5.5")

- Small power squeegee



TNT-SQ35MAH

- Pro handle squeegee



TNT-SQ225S

- Soft/long edge squeegee
- Ideal for windowpanes, French door panes, countertops, mirrors and auto windows

INSTALLATION

CAPACITOR ACCESSORIES



BCP-2.2

2.2 μ f CAPACITANCE

- Non-polarized electrolytic capacitor
- 100V
- Power handling: 200W
- 5% dissipation factor



BCP-3.3

3.3 μ f CAPACITANCE

- Non-polarized electrolytic capacitor
- 100V
- Power handling: 200W
- 5% dissipation factor



BCP-4.7

4.7 μ f capacitance

- Non-polarized electrolytic capacitor
- 100V
- Power handling: 200W
- 5% dissipation factor

WRS-5 (25W, 5 ohm resistor)

WRS-1010 (10W, 10 ohm resistor)

WRS-2015 (20W, 15 ohm resistor)

WRS-2525 (25W, 25 ohm resistor)

WRS-3310 (33W, 10 ohm resistor)

NON-INDUCTIVE RESISTORS

- Audio grade resistors are used in Zobel networks and fixed L-pad attenuator circuits for tweeters. Nickel-chromium elements, a high thermal conductivity ceramic core, and welded construction all contribute to their low-noise performance.



YCP-1.5 (1.5 μ f)

YCP-2.0 (2.0 μ f)

YCP-2.2 (2.2 μ f)

YCP-2.5 (2.5 μ f)

YCP-3.0 (3.0 μ f)

YCP-3.3 (3.3 μ f)

YCP-4.7 (4.7 μ f)

MYLAR CAPACITOR

- 25 pieces
- Low noise metalized film capacitors for high-end car audio installs. Metalized capacitors combined the reliability of self-healing action with high dielectric strength.



CAP-4.7

- Capacitor

CAP-1200A

HIGH PERFORMANCE BATTERY CAPACITOR

- Blue LED voltage digital display
- Sealed non-spillable design
- Ultra low ESR
- Chrome plated NEG/POS power block
- Higher voltage under load
- Surge 600A x 2 seconds
- Working voltage: 10~16V
- Equivalent Series Resistance: 10 million Ω
- Working temperature: -20°C ~ +50°C



INSTALLATION

ACCESSORIES



CPT-FLE 145

- Fleece for fiber glass
- 4' x 15'
- Blue

GCF-6036 BLK
GCF-6036 GRY
GCF-6036 TAN
GCF-6036 WIN

- Forming grill cloth
- 60" x 36"




GTD-1200

- Heat blower gun
- For stripping paint and varnish thawing metal pipes, drying paint plaster, heating shrink tubing, shaping and bonding plastic and pipe connections and also commonly used for drying window tinting
- Power: 750/1500W
- Voltage: 110-220V
- Frequency: 50/60Hz



CRI-09

- 9" back strap car radio installation rod



CRI-16

- 16" back strap car radio installation rod



SEM-03

- Pick resistant key lock
- Mini SPST switch

SWL-100

STEERING WHEEL LOCK

- Resistan material
- Red color



IS-BR6M-100BK ●

IS-BR6M-100BL ●

IS-BR6M-100GR ●

IS-BR6M-100RD ●

IS-BR6M-100WH ○

IS-BR6M-100YL ●

- Expandable Braided Sleeve
- Diameter: Φ 1/4" / 6mm
- Length: 100FT / 30.48 Meters
- Colors: Black, Blue & Red

IS-BR10M-100BK ●

IS-BR10M-100BL ●

IS-BR10M-100GR ●

IS-BR10M-100RD ●

IS-BR10M-100WH ○

IS-BR10M-100YL ●

- Expandable Braided Sleeve
- Diameter: Φ 3/8" / 10mm
- Length: 100FT / 30.48 Meters
- Colors: Black, Blue & Red

IS-BR19M-100BK ●

IS-BR19M-100BL ●

IS-BR19M-100GR ●

IS-BR19M-100RD ●

IS-BR19M-100WH ○

IS-BR19M-100YL ●

- Expandable Braided Sleeve
- Diameter: Φ 3/4" / 19mm
- Length: 100FT / 30.48 Meters
- Colors: Black, Blue & Red



INSTALLATION

ACCESSORIES



CPT-FLE 145

- Fleece for fiber glass
- 4' x 15'
- Blue

GCF-6036 BLK
GCF-6036 GRY
GCF-6036 TAN
GCF-6036 WIN

- Forming grill cloth
- 60" x 36"




GTD-1200

- Heat blower gun
- For stripping paint and varnish thawing metal pipes, drying paint plaster, heating shrink tubing, shaping and bonding plastic and pipe connections and also commonly used for drying window tinting
- Power: 750/1500W
- Voltage: 110-220V
- Frequency: 50/60Hz



CRI-09

- 9" back strap car radio installation rod



CRI-16

- 16" back strap car radio installation rod



NTX-5000G (Gold plastic)

NTX-5700ALG (Gold aluminum)

SIREN OUTPUT: 112 DB

- Size: Ø130 x 125
- Output Power: 250W (P.M.P.O)
125W (P.M.P.O)

- Impedance: 8 Ohm
- Frequency Range: 1,800Hz ~ 20,000kHz



NTX-5000CHR

SIREN OUTPUT: 112 DB

- Size: Ø130 x 125
- Output Power: 250W (P.M.P.O)
125W (P.M.P.O)
- Impedance: 8 Ohm
- Frequency Range: 1,800Hz ~ 20,000kHz

IS-BR6M-100BK ●

IS-BR6M-100BL ●

IS-BR6M-100GR ●

IS-BR6M-100RD ●

IS-BR6M-100WH ○

IS-BR6M-100YL ●

- Expandable Braided Sleeve
- Diameter: Φ 1/4" / 6mm
- Length: 100FT / 30.48 Meters
- Colors: Black, Blue & Red

IS-BR10M-100BK ●

IS-BR10M-100BL ●

IS-BR10M-100GR ●

IS-BR10M-100RD ●

IS-BR10M-100WH ○

IS-BR10M-100YL ●

- Expandable Braided Sleeve
- Diameter: Φ 3/8" / 10mm
- Length: 100FT / 30.48 Meters
- Colors: Black, Blue & Red

IS-BR19M-100BK ●

IS-BR19M-100BL ●

IS-BR19M-100GR ●

IS-BR19M-100RD ●

IS-BR19M-100WH ○

IS-BR19M-100YL ●

- Expandable Braided Sleeve
- Diameter: Φ 3/4" / 19mm
- Length: 100FT / 30.48 Meters
- Colors: Black, Blue & Red



INSTALLATION

ACCESSORIES


X-450RTF

- Double speakon with double 1/4" terminal and foam seal
- In/out XLR terminal
- In/out 1/4" terminal
- Banana plug/speaker wire input




X-825

- Double speakon with double 1/4" terminal
- 7" x 5"
- Without crossover

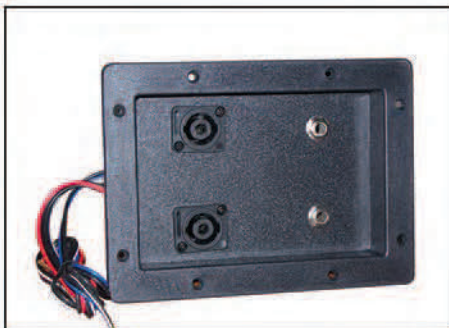

X-870

- Double speakon terminal with double 1/4" terminal
- 7" x 5"
- With crossover

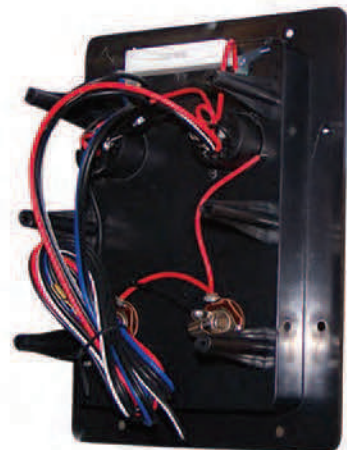

INSTALLATION

CARPETING ACCESSORIES



CPFB-150 (grey)

CPFB-150 BLUE (blue)

CPFB-150 BK (black)

SOUND FELT

- 4' x 150'
- 200g

CPFB-650 (grey)

CPFB-650B (black)

SOUND FELT

- 6' x 150'
- 200g



CPT-150 (grey)

CPT-150B (black)

CPT-150BL (blue)

CPT-150PL (platinum)

CPT-150RD (red)

SOUND FELT

- Indoor/outdoor carpeting
- Synthetic fiber
- 4' x 150'



CPT-150 (grey)

CPT-150B (black)

SOUND FELT

- 4' x 150'
- 280g

CPT-650 (grey)

CPT-650B (black)

SOUND FELT

- 6' x 150'
- 280g



CPT-450B (black)

CPT-450G (grey)

CPT-450P (platinum)

SOUND FELT

- Indoor/outdoor carpeting
- Synthetic fiber
- 4' x 15'



CPT-650 (grey)

CPT-650B (black)

SOUND FELT

- 6' x 150'



CPVC-4150BK (black)

CPVC-4150CF (carbon fiber)

CPVC-4150GR (grey)

PVC COVERING FOR SPEAKER BOX

- 0.0023" x 54" x 0.15"

INSTALLATION

FUSES



AGU TYPE FUSE

GOLD PLATED MIDGET CAR FUSES

- 10.3Ø x 38.10mm (13/32 x 1-1/2 inch)
- Voltage Rating: 32 V/125 V/250 V
- Ampere Rating: 1, 2, 3, 4, 5, 6, 7-1/2, 10, 15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 100.
- Replaces AGU and 4AG Fuses
- 5 PCs per Blister Pack



CRX-P14FM

FUSES

- Output: 12V
- Power: 25W
- Dimension: Ø10 x 44mm



FGMAC-1 / FGMAC-10


FGMAC-2 / FGMAC-3

FGMAC-4 / FGMAC-5

FGMAC-6.3 / FGMAC-8

CERAMIC FUSES (100 piece set)

- Ideal for microwave ovens and flat panel TV's



FC-10A / FC-12A

FC-15A / FC-20A

FC-25A / FC-30A

CERAMIC FUSES

- Available in 10, 12, 15, 20, 25, & 30 amps
- Ideal for microwave ovens and flat panel TV's



FM.25 / FM.5 / FM1

FM1.5 / FM2 / FM2.5

FM3 / FM3.15 / FM3.5

FM4 / FM5 / FM6

FM7 / FM8 / FM9

MINIATURE FUSES

- 100 piece set
- 250V



FN.25 / FN.5 / FN1 / FN1.5

FN10 / FN15 / FN2 / FN2.5

FN20 / FN25 / FN3 / FN3.5

FN-30 / FN-4 / FN-5 / FN-6

FN-7 / FN-8 / FN-9

INSTALLATION

FUSES



FAFC-1024

2 POSITION AFC FUSE HOLDER

- Platinum finish screws
- Accepts two AFC fuses
- One 4 gauge inputs and two 8 gauge outputs
- Inner steps ensure perfect recessed
- Fit of 4 and 8 gauge power cable into block
- Platinum base is precision machine



FAFC-2044

4 POSITION AFC FUSE HOLDER

- Platinum finish screws
- Accepts four AFC fuses
- Two 4 gauge Inputs and four 8 gauge outputs
- Inner steps ensure perfect recessed fit of 4 and 8 gauge power cable into block
- Platinum base is precision machine



IS-FBG-4328

2 POSITION AGU FUSE HOLDER

- 24Kt Finish Fuse Holder
- One 2 Gauge or two 4GA Input and two 8 Gauge Outputs
- Inner Steps Ensure perfect recessed fits Cable into Block
- Base is Precision machined



IS-BMS2500

4GA Power Kits

- 17' 4GA Red Power Cable
- 3' 4GA Black Power Cable
- 17' 2-RCA to 2-RCA Plugs Cable with signal Wire
- 3' Split Loom Tubing
- AFC Fuse Holder

- 100A AFC Fuse
- 10 Pcs. Cable Ties
- Ring Terminal 1+1 Pcs
- Spade Terminal 2 Pcs
- Butt Splices 2 Pcs



IS-ANLF-9310

IN-LINE ANL FUSE HOLDER

- Clear Housing with Mounting Base
- 1 FT (0.3M) 0Ga Red Power Cable
- 24Kt Finish Fuse Holder
- Water Resistant
- Perfect Fit for 4 or 0 Gauge Power Cable
- Connect Base is Precision Machined



IS-ANL-2310

HEAVY DUTY ANE (ANL) FUSE HOLDER

- Water Resistant
- All Metal Parts are 24kt Gold finish
- Includes a 150A ANE (ANL) fuse
- Accepts 0 to 4 Gauge Cable Wire
- Perfect Contact for Power Cable
- Set Screw Design – No Crimping required



FS-1

FS-2

- Chassis mount normal fuse holder



HD-013

- In-line fuse holder for car stereo

INSTALLATION

FUSES

ANL TYPE FUSE

VISIBLE THROUGH MICA WINDOW

- Voltage Rating: 32V
- Ampere Rating: 60, 70, 80, 100, 130, 150, 175, 200, 225, 250, 300.
- 2 PCs per Blister



ATM-LPM-10 (10 amp)

ATM-LPM-15 (15 amp)


ATM-LPM-20 (20 amp)

ATM-LPM-25 (25 amp)

ATM-LPM-30 (30 amp)

LOW-PROFILE MINI FUSES


- 10 pcs)
- Transparent body
- Voltage rating: 32V

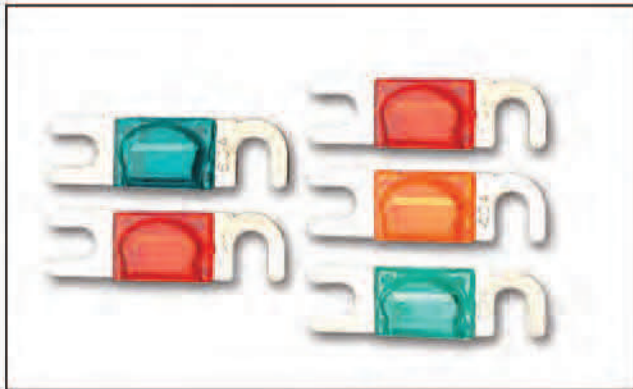

AFC TYPE FUSE (MIDI)

MIDGET CAR FUSES

- Transparent Body
- Voltage Rating: 32V
- Ampere Rating: 30, 40, 50, 60, 70, 80, 100, 120, 150
- 5 PCs Per Blister Pack

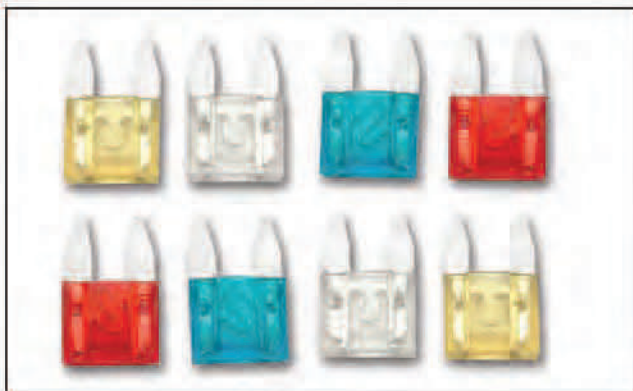

AST Mini-Blade Type

- Terminal Car Fuses
- Transparent Body
- Voltage Rating: 32V
- Ampere Rating Body Color

3 A	Violet
4 A	Pink
5 A	Tan
7-1/2 A	Brown
10 A	Red
15 A	Lt. Blue
20 A	Yellow
25 A	Natural
30 A	Lt. Green
- Replaces Min and ATM Fuses
- 5 PCs per Blister Pack

MAXI Type Fuse

TERMINAL CAR FUSES

- Transparent Body
- Voltage Rating: 32V
- Ampere Rating Body Color

3 A	Violet
4 A	Pink
5 A	Tan
7-1/2 A	Brown
10 A	Red
15 A	Lt. Blue
20 A	Yellow
25 A	Natural
30 A	Lt. Green
- 10 PCs per Blister Pack




ATC Type Fuse

TERMINAL CAR FUSES

- Transparent Body
- Voltage Rating: 32V
- Ampere Rating Body Color

20 A	Yellow
30 A	Lt. Green
35 A	Lt. Red
40 A	Orange
50 A	Red
60 A	Lt. Blue
70 A	Tan
80 A	Transparent
- 5 PCs per Blister Pack



INSTALLATION

WIRING HARNESS



ISO-002

- Volkswagen harness



WH-ACU 9810

- Wiring harness for Honda/Acura 1998 & up



WH-CHDO 0002

- Wiring harness for Chrysler 2000-2002



WH-CHMI 8794

- Wiring harness for Chrysler Plymouth, Dodge, Mitsubishi 1987-1994



WH-CHMI 9503

- Wiring harness for Chrysler Plymouth, Dodge, Mitsubishi 1995-2003



WH-FORD 9802

- Wiring harness for Ford



WH-FORDAMP 9597

- Wiring harness for Ford 1995-1997



WH-GM8802

- Wiring harness for GM 1988-2002



WH-GM9402

- Wiring harness for Saturn 2000



WH-HON 9802

- Wiring harness for Honda, Acura 1998-2002

INSTALLATION

WIRING HARNESS



WH-HYN 9902

- Wiring harness for Hyundai 1999 & up



WH-JVC09

- JVC radio replacement harness



WH-JVC16P

- JVC radio replacement harness



WH-KENWOOD16P

- Kenwood radio replacement harness



WH-MAZ 0110

- Wiring harness for Mazda 2001 and up



WH-MAZ 8902

- Wiring harness for Mazda



WH-MIT 9410

- Wiring harness for Mitsubishi 1994 & up



WH-VW8602

- Wiring harness for VW 1986-2002



VWS-1000

- Installation wire harness 2000 and up

INSTALLATION

WIRING HARNESS



WH-NIS 0710

- Wiring harness for Nissan 2007 & up



WH-NIS 9502

- Wiring harness for Nissan 1995-2002



WH-NIS 8694

- Wiring harness for Nissan 1986-1994



WH-PIONEERO1

- Pioneer radio replacement harness



WH-PIONEER11

- Pioneer radio replacement harness



WH-SUB 9010

- Wiring harness for Subaru 1990 & up



WH-TOY 8486

- Wiring harness for Toyota 1983-1986, Daihatsu 1989-1992



WH-TOY 8702

- Wiring harness for Toyota 1987-2002



WH-VW 8702

- Wiring harness for VW 1987-2002

INSTALLATION

ANTENNA ACCESSORIES



IS-HD10

- Honda 2010 and Up, antenna adapter



IS-HD11

- Honda 2015 antenna adapter



IS-SB10

- Subaru antenna adapter



IS-EXP14

14MHz BAND EXPANDER

- Motorola female to Motorola male



IS-EXP14-TYKT

14MHz BAND EXPANDER

- Toyota female to Toyota male
- 2014 and Up.



IS-EXP105N

14MHz BAND EXPANDER

- Nissan female to Nissan male
- 2007 and Up.



IS-MUV40

ANTENNA ADAPTOR

- VW antenna adapter



IS-PIOBP

BYPASS

COMPATIBLE WITH:

All Pioneer AVH, AVH-X and AVH-P models. All Pioneer SPA-DA AppRadio models (excluding models listed below). All Clarion and Jensen Video Models

NOT COMPATIBLE WITH:

Pioneer SPH-DA01, SPH-DA02, Pioneer AVIC Models.



TY-11

- Toyota antenna adapter

INSTALLATION

BATTERY CHARGER



LBCH-12M

POWER SUPPLY

- Double Insulated
- Thermal Overload Safety
- Electronic LED Display
- CE Approved
- For 12V Car, Motorcycle & Lawnmower Batteries



LBCH-612SW

POWER SUPPLY

- 6/12V, 6 AMP
- Blade Type Fuse
- Overload Protection



LBCH-6M

POWER SUPPLY

- Double Insulated
- Power Supply
- Thermal Overload Safety
- Electronic LED Display
- CE Approved
- For 12V Car, Motorcycle & Lawnmower Batteries
- 6/12V, 6 Amp



LBCH-6PL

POWER SUPPLY

- Automatic Battery Charger
- 6A Automatic Charging
- Fully protects against sparks, short circuit and overheating
- Suitable for all types of 12 V Lead Acid Batteries between 20-110 AH
- LED display shows changes on the status indicator
- Automatically switches to maintenance mode when battery is fully charged
- Reverse polarity warning

LBCH-80M

POWER SUPPLY

- Thermal Overload Safety
- Electronic LED Display
- CE Approved
- For 12V Car, Motorcycle & Lawnmower Batteries
- 12V, 20 Amp



INSTALLATION

CABLES



IS-SP-10-500CL

SPEAKER CABLE

- 10 Gauge
- 500 Ft.



IS-SP-12-500CL

SPEAKER CABLE

- 12 Gauge
- 500 Ft.



IS-SP-14-1000CL

SPEAKER CABLE

- 14 Gauge
- 1000 Ft.



IS-SP-16-1000CL

SPEAKER CABLE

- 16 Gauge
- 1000 Ft.



IS-SP-18-1000CL

SPEAKER CABLE

- 18 Gauge
- 1000 Ft.



IS-SERIES

OXYGEN FREE RCA CABLE

IS-3 (3 Feet)

IS-Y-M-2F (1 Feet)

IS-6 (6 Feet)

IS-Y-F-2M (1 Feet)

IS-17 (17 Feet)

INSTALLATION

CABLES



IS-SP-14-1000BR

SPEAKER CABLE

- 14 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud



IS-SP-16-1000BR

SPEAKER CABLE

- 16 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud



IS-SP-18-1000BR

SPEAKER CABLE

- 18 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud



IS-SP-20-1000BR

SPEAKER CABLE

- 20 Gauge
- 1000 Ft.
- 305 M.



1000FT./305M
Length/Longitud

INSTALLATION

ACCESSORIES



ISRS-350
DUAL CONE CAR SPEAKER

- 3.5"
- 45 Watts



ISRS-400
DUAL CONE CAR SPEAKER

- 4" Dual
- 45 Watts



ISRS-460
4X6" DUAL CONE CAR SPEAKER

- Output Power: 75 Watts (P.M.P.O.)
35Watts (R.M.S.)
- Freq. Response: 52Hz~2KHz
- Sensitivity: 88dB/W(1M)
- Impedance: 4 Ohm



ISRS-500
DUAL CONE CAR SPEAKER

- 5.25"
- 65 Watts



ISRS-600
DUAL CONE CAR SPEAKER

- 6"
- 75 Watts



ISRS-680
DUAL CONE CAR SPEAKER

- 6 x 8"
- 70 Watts



ISRS-690
DUAL CONE CAR SPEAKER

- 6 x 9"
- 75 Watts

- IS-K1700P**
AMPLIFIER INSTALLATION KIT
- 17' 8GA Blue Power Cable
 - 3' 8GA Silver Power Cable
 - 17' 2-RCA to 2-RCA Plugs Cables with Signal Wire
 - 3' Split Loom Tubing
 - AFC Fuse Holder
 - 60A AFC Fuse
 - 10 Pcs Cable Ties
 - Ring Terminal 1+1 Pcs
 - Spade Terminal 3 Pcs
 - Butt Splices 2 Pcs



NOW INCLUDES:
60A AFC Holder & Fuse

- IS-K2500P**
AMPLIFIER INSTALLATION KIT
- 17' 4GA Blue Power Cable
 - 3' 4GA Silver Power Cable
 - 17' 2-RCA to 2-RCA Plugs Cables with Signal Wire
 - 3' Split Loom Tubing
 - AFC Fuse Holder
 - 100A AFC Fuse
 - 10 Pcs Cable Ties
 - Ring Terminal 1+1 Pcs
 - Spade Terminal 2 Pcs
 - Butt Splices 2 Pcs



NOW INCLUDES:
100A AFC Holder & Fuse

- IS-K800**
AMPLIFIER INSTALLATION KIT
- 17' 10GA Red Power Cable
 - 3' 10GA Black Power Cable
 - 15' 2-RCA to 2-RCA Plugs Cable with signal Wire
 - 3' Split Loom Tubing
 - 10 AWG Fuse Holder
 - 30A ATC Fuse
 - 10 Pcs Cable Ties
 - Ring Terminal 1+1 Pcs
 - Spade Terminal 5 Pcs
 - Butt Splices 2 Pcs



INSTALLATION

CAMERA ACCESSORIES



IS-RVC-165

CAR REAR VIEW CAMERA

- Water-proof & Dust-proof
- High definition
- Night Vision & Wide Angle
- Voltage: 8-15V
- Size: Φ 16.5 x 22(H) mm



IS-RVC-185

CAR REAR VIEW CAMERA

- Water-proof & Dust-proof
- High definition
- Night Vision & Wide Angle
- Voltage: 8-15V
- Size: Φ 18.5 x 32(H) mm



IS-RVC-803

CAR REAR VIEW CAMERA

- Water-proof & Dust-proof
- High definition
- Night Vision & Wide Angle
- Voltage: 8-15V
- Size: Φ 20 x 30(H) mm



IS-RVC-258GL

CAR REAR VIEW CAMERA

- Water-proof & Dust-proof
- High definition
- Night Vision & Wide Angle
- Voltage: 8-15V
- Size: Φ 18 x 20(H) mm



IS-DVR1080

VEHICLE DVR

- Decode Format: H.264
- Video Format: Mov
- Video Resolution: 1080P (1920 x 1080), 720 x 480
- Video System: PAL, NTSC
- Image Format: JPEG
- Image Resolution: 1M (1280x720), 2M (1600x900), 3M (2048x1152)
- Audio System: Built-in microphone/speaker (AAC)
- Exposure Compensation: +3, -1, 0, +1, +2, -3, -2
- White Balance Mode: Auto, Tungsten, Fluorescent, Cloudy, Daylight

2
Inch Screen Size

32
GB
SD card Reads up to



300
Meters Distance

2.4
GHz
Wireless Connection

IS-RLC-245G-BLK

CAR REAR VIEW CAMERA

- High resolution
- Super low illumination
- Weather-proof: IP 65
- Anti-fog function
- Wide angle (120-170°)
- Easy to install
- 9"x6-3/4"

INSTALLATION

CAR ACCESSORIES



IS-RM200


HI/LO CONVERTER WITH REMOTE TURN ON

- Line Output Converter with Remote turn ON
- Gold female RCA Output
- Adjustable Line Output Converter
- Converts from 10 to 25 watts per channel to Pre-Amp output
- Remote turn ON circuit


ICT-115LED

LED CIRCUIT TESTER

- Quickly checks all 6 & 12 Volts Systems
- Supplied with long 47" / 1.2M Cable
- Strong alligator lead Clip
- Test short / open Circuit
- With Red LED



With Red LED



USB Power Port

PI-70U

PLUG-IN POWER INVERTER

- Input: 12V DC
- Output: 100 Watts Max Continuous Power
- 15 Amp Replacement Fuse
- With USB Power Port
- Power Up AC Appliances in your Outdoor Activities




USB Power Port



IS-RVC-803

USB CHARGER

- Input: 12V/24V DC
- Output: 2.1A max 5V DC / 1 or 2
- Material: Housing: Nylon Cap: PVC
- USB sockets for charging mobile phones, MP3 players etc
- Screw in lighter socket Screw in lighter socket with dust-proof cover
- Optional accessories – single/dual mounting panel

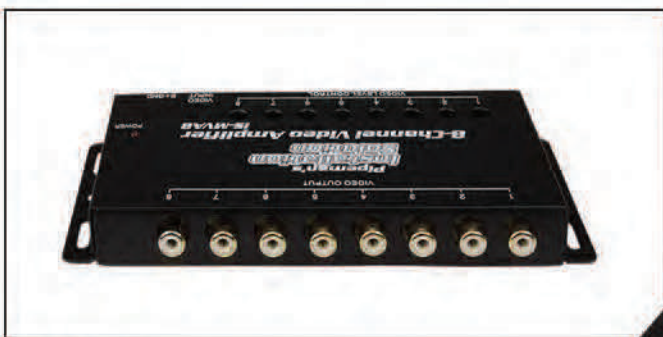

IS-MVA8

8-CHANNEL VIDEO AMPLIFIER

- Each channel output can be independently adjusted
- Shielded Metal Housing
- Power Supply Voltage: 12V
- Output Impedance: 75Ω
- Video Level: Input: 1.0Vp-p / Output: 0.5-1.5Vp-p



AUDIO

TWEETERS



NTX-1006PZG

ROUND PIEZO TWEETER W/ GRILL

- Frequency Range: 2K~20KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 66mm



NTX-1004LIP

3 1/2" BLACK SUPER HORN

- Frequency Range: 4K~27KHz
- Power RMS/Max: 30/60W
- Impedance: 4-9 Ohm
- Mounting Diameter: 74mm



NTX-1004 NICKEL

PIEZO TWEETER 3/4" X 3/4"

- Frequency Range: 4K~27KHz
- Power RMS/Max: 30/60W
- Impedance: 4-8 Ohm
- Mounting Diameter: 77mm



NTX-1004EP

ELECTRIC PIEZO TWEETER 3/4" X 3/4"

- Frequency Range: 4K~27KHz
- Power RMS/Max: 30/60W
- Impedance: 4-8 Ohm
- Mounting Diameter: 76mm



NTX-1004PZ

PIEZO TWEETER 3/4" X 3/4"

- Frequency Range: 4K~20KHz
- Power RMS/Max: 30/60W
- Impedance: 4-9 Ohm
- Mounting Diameter: 76mm



NTX-1004CML

N.A. PIEZO TWEETER 3-3/8" X 3-3/8"

- Frequency Range: 5~20KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 76mm



NTX-1011GR

SUPER HIGH PIEZO 80W TWEETER

- Frequency Range: 5K~20KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 50mm



NTX-1033PZ

PIEZO TWEETER 3" SQUARE

- Frequency Range: 5K~20KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 58mm

AUDIO

TWEETERS



NTX-3004 (Plastic)
TITANIUM SUPER TWEETER 250W
• Frequency Range: 3K~20KHz
• Power RMS/Max: 125/250W
• Impedance: 4-8 Ohm
• Mounting Diameter: 126mm



NTX-3535PZ
3.5" X 3.5" TWEETER
• Frequency Range: 2.3K~20KHz
• Power RMS/Max: 75/150W
• Impedance: 4-8 Ohm
• Mounting Diameter: 73mm



NTX-4545PZ
4.5" X 4.5" TWEETER
• Frequency Range: 2K~20KHz
• Power RMS/Max: 75/150W
• Impedance: 4-8 Ohm
• Mounting Diameter: 85mm



NTX-1007PZ
3 3/4" X 2 3/4" PLASTIC SUPER
HORN TWEETER
• Frequency Range: 3K~30KHz
• Power RMS/Max: 37.5/75W
• Impedance: 4-8 Ohm
• Mounting Diameter: 85mm x 39mm



NTX-1015PZ
2X5" PIEZO 75W TWEETER
• Frequency Range: 3K~40KHz
• Power RMS/Max: 37.5/75W
• Impedance: 4-8 Ohm
• Mounting Diameter: 121mm x 43mm



NTX-1150DPZ
11" X 5" DUAL WIDE DRIVER
DISPERSION PLASTIC HORN
• Freq. Resp: 3K-20 KHz
• Power 150 Watts
• Impedance 4~8 Ohms



NTX-1405PZ
15-1/4" X 5" WIDE DISPERSION
PLASTIC HORN
• Frequency Range: 3.5K~20KHz
• Power RMS/Max: 75/150W
• Impedance: 4-8 Ohm
• Mounting Diameter: 347mm x 96mm



NTX-3007 (Nickel)
NTX-3007PZ (Black)
3-1/2" X 7-1/2" PLASTIC TWEETER
• Frequency Range: 1,800K~30KHz
• Power RMS/Max: 60/120W
• Impedance: 4-8 Ohm
• Mounting Diameter: 157mm x 53mm



NTX-3009PZ
3" X 9" PLASTIC CELLULAR HORN
• Frequency Range: 3K~30KHz
• Power RMS/Max: 60/120W
• Impedance: 4-8 Ohm
• Mounting Diameter:
197mm x 65mm

AUDIO

TWEETERS



NTX-362

3" X 5" DOUBLE WIDE DISPERSION
PLASTIC TWEETER

- Frequency Range: 3K~25KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 163mm x 95mm



NTX-3711PZ

3-1/2" X 3-1/2" PLASTIC AUPER
HORN TWEETER

- Frequency Range: 4K~27KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 88mm x 88mm



NTX-105045PZ

PIEZO TWEETER

- Frequency Range: 3.5K~20KHz
- Power RMS/Max: 75/150W
- Impedance: 4-8 Ohm
- Mounting Diameter: 165mm x 112mm



NTX-1044

N.A. PIEZO TWEETER 4" X 4" 50

- Frequency Range: 5~20KHz
- Power RMS/Max: 25/50W
- Impedance: 4-8 Ohm
- Mounting Diameter: 77mm



NTX-110110

SQUARE HORN 11" x 11"

- Throat: 1-1/12"
- Type: Bolt on
- Mounting Diameter: 212 x 212mm



NTX-1111

SQUARE HORN 11.5" X 11.5"

- Throat: 1-3/8" (34mm)
- Type: Screw on with metal thread
- Mounting Diameter: 244 x 254.5mm



NTX-1407

HORN 7" X 13-3/4" X 8-1/2" DEEP

- Throat: 1-3/8" (34mm)
- Type: Screw on with metal thread
- Mounting Diameter: 320mm x 140mm



NTX-1425

PLASTIC HORN WITHOUT DRIVER

- Throat: 1" (25mm)
- Type: Metal socket for solid fitting
- Mounting Diameter: 105.7mm x 105.7mm



NTX-1450

PLASTIC HORN WITHOUT DRIVER

- Throat: 2" (50mm)
- Type: Metal socket for sold fitting
- Mounting Diameter: 136mm

AUDIO

HORNS



NTX-0714

SQUARE HORN 7 1/4" X 7 1/4"

- Throat: 1-1/2" (240mm)
- Type: Bolt on for solid fitting
- Mounting Diameter: 150mm x 150mm



NTX-0714SCR

SQUARE HORN 7 1/4" X 7 1/4"

- Throat: 1-3/8" (33mm)
- Type: Copper thread screw
- Mounting Diameter: 147mm x 148mm



NTX-1466

SQUARE HORN 5-1/2"x 6-1/4"x 4-1/2"

- Throat: 2" (50mm)
- Type: Screw on with metal thread
- Mounting Diameter: 158mm x 140mm



NTX-1711

HORN WITHOUT DRIVER

- Throat: 1-1/2" (38)
- Type: Screw on/Bolt on with accessories included
- Mounting Diameter: 432mm x 385mm



NTX-1810

LARGE LIP HORN 18"X10"

- Throat: 1-3/8" (34mm)
- Type: Screw on with metal thread
- Mounting Diameter: 463mm x 243mm



NTX-3515

PLASTIC HORN WITHOUT DRIVER

- Throat: 1-3/8" (34mm)
- Type: Screw on with metal thread
- Mounting Diameter: 348.5mm x 75mm



NTX-410CML

TWO TONE ABS HORN

- Throat: 1-3/8" (34mm)
- Type: Screw On with plastic thread
- Mounting Diameter: 265mm x 112mm



NTX-413

PROFESSIONAL HORN

- Frequency Range: 500K~11KHz
- Power RMS/Max: 100/200W
- Impedance: 8 Ohm
- Mounting Diameter: 270mm x 110mm



NTX-417

4" X 10" HORN 180W

- Frequency Range: 500K~11KHz
- Power RMS/Max: 100/200W
- Impedance: 4-8 Ohm
- Mounting Diameter: 270mm x 100mm x 196mm

AUDIO

HORNS



NTX-515

- 5 X 15 HORN WITH METAL SOCKET
- Throat: 1-3/8" (34mm)
 - Type: Screw on with metal thread
 - Mounting Diameter: 388mm x 130mm



NTX-5565

- 5.5" x 6.5" ABS PLASTIC HORN
- Throat: 1" (26.5mm)
 - Type: Bolt on
 - Mounting Diameter: 100mm x 125mm



NTX-6080

- 6" x 8" ABS PLASTIC HORN
- Throat: 1" (26.5mm)
 - Type: Bolt on
 - Mounting Diameter: 160mm x 120mm



NTX-617

- HORN 6" x 17" WITH LARGE LIP
- Throat: 1-3/8" (34mm)
 - Type: Screw on with metal thread
 - Mounting Diameter: 194mm x 154mm



NTX-6170

- BIG HORN 6" x 17" NO LIP
- Throat: 1-3/8" (34mm)
 - Type: Screw on with metal thread
 - Mounting Diameter: 418mm x 160mm



NTX-7095

- 7" x 9.5" ABS PLASTIC HORN
- Throat: 1" (26.5mm)
 - Type: Bolt on
 - Mounting Diameter: 190mm x 140mm



NTX-76

- PLASTIC HORN 7" X 6"
- Throat: 1-1/4" (31mm)
 - Type: Screw on with metal thread
 - Mounting Diameter: 194mm x 154mm



NTX-917

- 9" X 17" Horn with 2" hole & 1
- Throat: 1-3/8" and includes 2" adaptor
 - Type: Bolt on
 - Mounting Diameter: 348.5mm x 75mm



NTX-BN

- ABS HORN FLARE w/2" THROAT
- Throat: 2"
 - Type: Bolt on
 - Mounting Diameter: 260mm x 140mm

AUDIO

HORNS

NDX-1312

12oz. DRIVER TITANIUM DIAPHRAGM

- Voice Coil: 1-1/4" (34.4mm)
- Impedance: 8 Ohms
- Power 200 Watts
- Diameter: 1" (25.4mm)
- Mount Screw: 1-3/8" (1cm)
- O.C. Resistance: 5.8
- Sensitivity: 102dB/W/m
- 100W RMS
- Frequency: 1500-20KHz
- Density: 1.5T
- Net Weight: 0.74Kg
- Measurement: 105mm x 76 mm



NDX-3520

200 WATTS DRIVER

- Voice Coil: 1-1/2" (38mm) Aluminum
- Impedance: 8 Ohms
- Magnet: 20 Oz
- Power RMS/Max: 100/200W
- Mounting Diameter: 34mm

NDX-3540

300 WATTS DRIVER

- Voice Coil: 1-1/2" (38mm) Aluminum
- Impedance: 8 Ohms
- Magnet: 40 Oz
- Power RMS/Max: 150/300W
- Mounting diameter: 34mm

NDX-3580

400 WATTS DRIVER

- Voice Coil: 1-1/2" (38mm) Aluminum
- Impedance: 8 Ohms
- Magnet: 80 Oz
- Power RMS/Max: 200/400W
- Mounting diameter: 34mm



NSDV-1312

1.35" KSV VOICE COIL

- Impedance: 8Ω
- Replacement voice coil

VOICE COIL FOR NDX-1312



U-55S

REPLACEMENT VOICE COIL

- to SI-55S



NTX-4000USA

HIGH-GRADE DYNAMIC DRIVER

- Voice Coil: 2" (51mm) Aluminum
- Impedance: 8 Ohms
- Power RMS/Max: 250/500W
- Mounting diameter: 90mm



NDX-6720

20 oz DRIVER

- Voice Coil: 1-1/2" (38mm) Aluminum
- Impedance: 8 Ohms
- Magnet: 20 Oz
- Power RMS/Max: 175/350W
- Mounting Diameter: 34mm

NSDV-6720
Replacement Coil



NDX-6740

40 oz DRIVER

- Voice Coil: 1-1/2" (38mm) Aluminum
- Impedance: 8 Ohms
- Magnet: 40 Oz
- Power RMS/Max: 200/400W
- Mounting diameter: 34mm

NSDV-6740
Replacement Coil

AUDIO

PIEZO DRIVERS / SPEAKERS



NTD-100

PIEZO DRIVER SMALL

- Frequency Resonse: 3.5-20KHz
- Impedance: 4-8 Ohms
- Power RMS/Max: 37.5/75W



NTD-300

PIEZO DRIVER LARGE

- Frequency Resonse: 1.5-22KHz
- Impedance: 4-8 Ohms
- Power RMS/Max: 50/100W



NTD-350

PIEZO DRIVER LARGE

- Frequency Resonse: 1.5-22KHz
- Impedance: 4-8 Ohms
- Power RMS/Max: 50/100W



NTX-1S

2" SQUARE TWEETER 20W

- Frequency Resonse: 2K-18KHz
- Power: 20 Watts
- Impedance: 8 Ohms
- Mounting diameter: \varnothing 66.5-4-4.5*6.5



NTX-2S

2.5" SQUARE SPEAKER

- Frequency Resonse: 2K-18k HZ
- Power RMS/Max: 10/20W
- Impedance: 8 Ohms
- Mounting diameter: \varnothing 74-4-4.5*7



NTX-3R

3.5" ROUND SPEAKER

- Frequency Response: 2K-18K Hz
- Power RMS/Max: 10/20W
- Impedance: 8 Ohms
- Mounting Diameter: \varnothing 89-4- \varnothing 5

AUDIO

MIDRANGES



MG-513

10 OZ SPEAKER WITH GRILL

- Frequency Response: 160-16000Hz
- Power RMS/Max: 30/60W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 116-4 - \text{C } 5.2$



NMG-408

4" MIDRANGE 25 WATTS

- Frequency Response: 1,200-15Hz
- Power RMS/Max: 12.5/25W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 114-4 - \text{C } 5$



NMG-510

5" MIDRANGE 60 WATTS

- Frequency Response: 1K-15KHz
- Power RMS/Max: 12.5/25W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 135-4 - \text{C } 4.5$



NMG-612

6" MIDRANGE 70 WATTS

- Frequency Response: 800-10KHz
- Power RMS/Max: 35/70W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 166-4 - \text{C } 4.2$



NMG-818

8" MIDRANGE 90 WATTS

- Frequency Response: 600-10KHz
- Power RMS/Max: 45/90W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 211.5-6 - \text{C } 4.8$



NMX-2003

4" SILVER CD CONE
WITH FOAM EDGE

- 0.7" Aluminum Voice Coil
- 7 oz. Magnet
- 35 Watt
- 8 Ohm

NMX-412-8

4 1/2" MIDRANGE 30WATTS

- Frequency Response: 700-6KHz
- Power RMS/Max: 15/30W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 119-4 - \text{C } 5$



NMX-516-8

5" MIDRANGE 100 WATTS

- Frequency Response: 500-10KHz
- Power RMS/Max: 15/30W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 124.5-4 - \text{C } 4.5$



AUDIO

SPEAKERS



NWX-4002

4" WOOFER

- Frequency Response: 130-8KHz
- Power RMS/Max: 15/45W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 117\text{-}2\text{-}6.5\text{*}12$



NWX-4013CR

4" PAPER CONE SPEAKER

- Frequency Response: 160-16000Hz
- Power RMS/Max: 15/45W
- Impedance: 4 Ohms
- Mounting Diameter: $\text{C } 117\text{-}2\text{-}6.5\text{*}12$



NWX-404-8RD

4" SPEAKER PAPER CONE

- Frequency Response: 130-16000Hz
- Power RMS/Max: 10/20W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 114.5\text{-}4\text{-}5\text{*}7$



NWX-5035-8RD

5" MIDRANGE PAPER CONE 57"

- Frequency Response: 90-14000Hz
- Power RMS/Max: 12.5/25W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 119.5\text{-}4\text{-}5$



NBM-406A

DBLE MAGNET SPEAKER, 4" FOAM PA

- Frequency Response: 140-16000Hz
- Power RMS/Max: 10/20W
- Impedance: 6 Ohms
- Mounting Diameter: $\text{C } 114.5\text{-}4\text{-}5\text{*}7$



NBM-406S

DBLE MAGNET SPEAKER, 4" FOAM PA

- Frequency Response: 120-16000Hz
- Power RMS/Max: 10/20W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 119\text{-}4\text{-}5$

AUDIO

SPEAKERS



NBM-516S

SPEAKER 5 1/4", 80W, 8OHM

- Frequency Response: 110-12000Hz
- Power RMS/Max: 40/80W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 138\text{-4-}\text{C } 4.2$



NBM-610R

DOUBLE MAGNET SPEAKER

- Frequency Response: 65-12000Hz
- Power RMS/Max: 15/30W
- Impedance: 6 Ohms
- Mounting Diameter: $\text{C } 156\text{-4-}\text{C } 5.2$



NBM-610S

DOUBLE MAGNET SPEAKER

- Frequency Response: 65-12000Hz
- Power RMS/Max: 15/30W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 157\text{-4-}\text{C } 5.8$



NBM-612S

DOUBLE MAGNET SPEAKER

- Frequency Response: 65-12000Hz
- Power RMS/Max: 15/30W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 157\text{*}4\text{-}\text{C } 5.8$



NWC-466

4" X 6" WOOFER 25 WATTS

- Frequency Response: 80-14000Hz
- Power RMS/Max: 12.5/25W
- Impedance: 8 Ohms
- Mounting Diameter: $77\text{*}133\text{-3-}\text{C } 7$



NWX-403-4

4" WOOFER 50W

- Frequency Response: 120-16000Hz
- Power RMS/Max: 25/50W
- Impedance: 4 Ohms
- Mounting Diameter: $\text{C } 117\text{-4-}\text{C } 5.7$



NWX-416-4

4" WOOFER 70W 1" AL VOICE C

- Frequency Response: 90-14000Hz
- Power RMS/Max: 35/70W
- Impedance: 4 Ohms
- Mounting Diameter: $\text{C } 115\text{-4-}\text{C } 5.7$

AUDIO

SPEAKERS



NWX-416-8

4" WOOFER 70W 1" AL VOICE C

- Frequency Response: 90-14000Hz
- Power RMS/Max: 35/70W
- Impedance: 4 Ohms
- Mounting Diameter: $\text{C } 115\text{-}4\text{-}5^*7$



NWX-510

5" PAPER CONE

- Frequency Response: 70-14000Hz
- Power RMS/Max: 30/60W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 124\text{-}4\text{-}4.3$



NWX-516-4SQ

4" PAPER CONE

- Frequency Response: 65-12000Hz
- Power RMS/Max: 50/100W
- Impedance: 4 Ohms
- Mounting Diameter: $\text{C } 138\text{-}4\text{-}5.5^*8$



NWX-516-8SQ

4" PAPER CONE

- Frequency Response: 65-12000Hz
- Power RMS/Max: 50/100W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 138\text{-}4\text{-}5.5^*8$



NWX-520-4SQ

4" PAPER CONE

- Frequency Response: 70-7000Hz
- Power RMS/Max: 100/200W
- Impedance: 4 Ohms
- Mounting Diameter: $138^*4\text{-}5.5^*8$



NWX-520-8SQ

4" PAPER CONE

- Frequency Response: 100Hz-12000Hz
- Power RMS/Max: 30/60W
- Impedance: 8 Ohms
- Mounting Diameter: $138^*4\text{-}5.5^*8$



NWX-5035-8SQ

5" SQUARE FRAME PAPER CONE

- Frequency Response: 85-14000Hz
- Power RMS/Max: 50/100W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 119\text{-}4\text{-}4.3$



NWX-610-4

6" PAPER CONE

- Frequency Response: 80Hz-13000Hz
- Power RMS/Max: 30/60W
- Impedance: 4 Ohms
- Mounting Diameter: $156.5^*4\text{-}5$



NBM-610-8

DOUBLE MAGNET SPEAKER

- Frequency Response: 65-12000Hz
- Power RMS/Max: 15/30W
- Impedance: 8 Ohms
- Mounting Diameter: $\text{C } 157\text{-}4\text{-}5^*8$

AUDIO

SPEAKERS



NWX-612-4

6" FOAM EDGE PAPER CONE

- Frequency Response: 85Hz-12000Hz
- Power RMS/Max: 32.5/65W
- Impedance: 4 Ohms
- Mounting Diameter: 157*4-5*8



NWX-612-8

6" FOAM EDGE PAPER CONE

- Frequency Response: 85Hz-12000Hz
- Power RMS/Max: 32.5/65W
- Impedance: 8 Ohms
- Mounting Diameter: 157*4-5*8



NWX-613-4 (4 Ohms)

NWX-613-8 (8 Ohms)

6" PAPER CONE

- Frequency Response: 85Hz-12000Hz
- Power RMS/Max: 12.5/25W
- Mounting Diameter: 157*4-5*8



NWX-616-4 (4 Ohms)

NWX-616-8 (8 Ohms)

6.5" PAPER CONE

- Frequency Response: 85Hz-12000Hz
- Power RMS/Max: 40/80W
- Mounting Diameter: 157*4-5*8



NWX-620-4 (4 Ohms)

NWX-620-8 (8 Ohms)

6.5" PAPER CONE

- Frequency Response: 70-8KHz
- Power RMS/Max: 40/80W
- Mounting Diameter: Φ 144MM



NWX-623-8

6.5" PAPER CONE

- Frequency Response: 70Hz-13000Hz
- Power RMS/Max: 65/130W
- Impedance: 8 Ohms
- Mounting Diameter: 156*4-5.8



NWX-820-4 (4 Ohm)

NWX-820-8 (8 Ohm)

6.5" PAPER CONE

- Frequency Response: 70-8KHz
- Power RMS/Max: 40/80W
- Mounting Diameter: Φ 144MM

NWX-832R (Rubber edge)

NWX-832F (Foam edge)

NWX-832C (Cloth edge)

8" PAPER CONE

- Frequency Response: 70Hz-13000Hz
- Power RMS/Max: 100/200W
- Impedance: 4 Ohms
- Mounting Diameter: 213*4-4.5



NWX-833

8" PAPER CONE

- Frequency Response: 70Hz-13000Hz
- Power RMS/Max: 50/100W
- Impedance: 8 Ohms
- Mounting Diameter: 192*4-4*7



AUDIO

SPEAKERS



NWX-1844ST

15" PAPER CONE

- Frequency Response: 25-6KHz
- Power RMS/Max: 175/300W
- Impedance: 8 Ohms
- Mounting Diameter: Φ 420MM



NWX-1077

10" PAPER CONE

- Frequency Response: 60Hz-6000Hz
- Power RMS/Max: 75/150W
- Impedance: 8 Ohms
- Mounting Diameter: 282*4-5.5



RST-65115-710V

ROCK SPEAKER

- 6.5" 2-Way Speaker
- IMPP Cone with Rubber Edge
- 1" ASV Coil
- Magnet: 18 Oz
- Titanium Tweeter
- Voice Coils: 0.75" KSV
- Magnet: 19 x 2
- Output Power: 100W Max, 50W RMS
- Frequency Response: 80Hz-20KHz
- Sensitivity: 88dB
- Impedance: 8 Ω
- Enclosure material: LLDPE
- Environment: IP56
- Product Dimensions: 12.6" x 9.1" x 10.6" (320 x 230 x 270mm)
- Material: Glass reinforced plastics
- Transformer: 70V: 32-16-8-4-2W
100V: 32-16-8-4W



NWX-1050

10" PAPER CONE WITH CLOTH EDGE

- Frequency Response: 35-1KHz
- Power RMS/Max: 150/300W
- Impedance: 4 Ohms
- Mounting Diameter: 244*8-5.5*9

OSN-65115-710V

12.4" OUTDOOR/INDOOR WOOFER

- Frequency Response: 80-10KHz
- Power RMS/Max: 7.5/15W
- Impedance: 8 Ohms
- Mounting Diameter: 270mm x 305mm



CUBE-200

DUAL 3" CUBE SPEAKERS

- Output Power: 80Watts (P.M.P.O.)
40Watts (R.M.S.)
- Frequency Response: 120Hz-18,000Hz
- Sensitivity: 90 dB / W(1M)
- Impedance: 8 Ohm



AUDIO

WOOFERS



NSCE-620

WOOFER WITH 1" ALUMINUM VOICE COIL

- 6" Paper Cone with Cloth Edge
- Frequency Response: 70-10000 Hz
- Magnet Weight: 20 Oz
- Sensitivity: 86 dB
- Voice Coil Size: 1" ASV
- Max Power: 250 W
- Impedance: 8 Ohm



NSCE-830

WOOFER WITH 1" ALUMINUM VOICE COIL

- 8" Paper Cone with Cloth Edge
- Frequency Response: 50-5000 Hz
- Magnet Weight: 30 Oz
- Sensitivity: 89 dB
- Voice Coil Size: 1" ASV
- Max Power: 350 W
- Impedance: 8 Ohm



NSCE-1040

10" WOOFER WITH 2" ALUMINUM VOICE COIL

- 10" Paper Cone with Cloth Edge
- Frequency Response: 50-4500 Hz
- Magnet Weight: 40 Oz
- Sensitivity: 88 dB
- Voice Coil Size: 2" ASV
- Max Power: 425 W
- Impedance: 8 Ohm



NSCE-1250

WOOFER WITH 2" ALUMINUM VOICE COIL

- 12" Paper Cone with Cloth Edge
- Frequency Response: 35-5000 Hz
- Magnet Weight: 50 Oz
- Sensitivity: 92 dB
- Voice Coil Size: 2" ASV
- Max Power: 500 W
- Impedance: 8 Ohm



NSCE-1550

WOOFER WITH 2" ALUMINUM VOICE COIL

- 12" Paper Cone with Cloth Edge
- Frequency Response: 35-5000 Hz
- Magnet Weight: 50 Oz
- Sensitivity: 92 dB
- Voice Coil Size: 2" ASV
- Max Power: 500 W
- Impedance: 8 Ohm

AUDIO

SUBWOOFERS



NWX-655

- 6" HIGH-POWERED SUBWOOFER
- 150 Watts Max Power
- 75 Watts Rated Power
- Frequency Response: 45-4800Hz
- Sensitivity: 89dB
- 1" 2-Layer Single Voice Coil ASV
- Rigid Steel Basket
- Mounting Depth: 74mm (3")
- Impedance: 8 Ohms
- 20 Oz Magnet



NWX-855

- 8" HIGH-POWERED SUBWOOFER
- 200 Watts Max Power
- 100 Watts Rated Power
- Frequency Response: 40-5000Hz
- Sensitivity: 89dB
- 1" 2-Layer Single Voice Coil ASV
- Rigid Steel Basket
- Mounting Depth: 88mm (3-1/2")
- Impedance: 8 Ohms
- 20 Oz Magnet



NWX-1055

- 10" HIGH-POWERED SUBWOOFER
- 350 Watts Max Power
- 175 Watts Rated Power
- Frequency Response: 35-4000Hz
- Sensitivity: 90dB
- 1.5" 2-Layer Single Voice Coil ASV
- Rigid Steel Basket
- Mounting Depth: 107mm (4-1/4")
- Impedance: 8 Ohms
- 33 Oz Magnet



NWX-1255

- 12" HIGH-POWERED SUBWOOFER
- 450 Watts Max Power
- 225 Watts Rated Power
- Frequency Response: 35-3500Hz
- Sensitivity: 90dB
- 1.5" 2-Layer Single Voice Coil ASV
- Rigid Steel Basket
- Mounting Depth: 120mm (4-3/4")
- Impedance: 8 Ohms
- 33 Oz Magnet



NWX-1555

- 15" HIGH-POWERED SUBWOOFER
- 500 Watts Max Power
- 250 Watts Rated Power
- Frequency Response: 27-3000Hz
- Sensitivity: 91dB
- 2" 2-Layer Single Voice Coil ASV
- Rigid Steel Basket
- Mounting Depth: 153mm (6")
- Impedance: 8 Ohms
- 38 Oz Magnet

AUDIO

WOOFERS



STX-848

8" WOOFER WITH 1" ASV VOICE COIL

- 150 Watts
- with Foam Edge
- Voice Coil: 1" ASV
- Magnet: 20 Oz
- Frequency Response: 50Hz-12KHz
- Impedance: 8Ω
- Sensitivity: 88dB
- Sold individually



STX-1048

10" WOOFER WITH 1.5" ASV VOICE COIL

- 300 Watts
- with Foam Edge
- Voice Coil: 1.5" ASV
- Magnet: 30 Oz
- Frequency Response: 35Hz-10KHz
- Impedance: 8Ω
- Sensitivity: 88dB
- Sold individually



STX-1248

12" WOOFER WITH 2" ASV VOICE COIL

- 350 Watts
- with Foam Edge
- Voice Coil: 2" ASV
- Magnet: 30 Oz
- Frequency Response: 30Hz-10KHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Sold individually



STX-1548

15" WOOFER WITH 2" ASV VOICE COIL

- 600 Watts
- with Foam Edge
- Voice Coil: 2" ASV
- Magnet: 40 Oz
- Frequency Response: 30Hz-8KHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Sold individually

AUDIO

LOUDSPEAKERS



SRZ-616C

6" DUAL CONE LOUDSPEAKER

- Frequency Response: 75-25000 Hz
- Magnet Weight: 16 Oz
- Sensitivity: 88 dB
- Voice Coil Size: 1" ASV
- Max Power: 100 W
- Impedance: 8 Ohm
- Sold individually



SRZ-820C

8" DUAL CONE LOUDSPEAKER

- Frequency Response: 55-25000 Hz
- Magnet Weight: 20 Oz
- Sensitivity: 88 dB
- Voice Coil Size: 1" ASV
- Max Power: 150 W
- Impedance: 8 Ohm
- Sold individually



SRZ-1024C


10" DUAL CONE LOUDSPEAKER

- Frequency Response: 35-15000 Hz
- Magnet Weight: 24 Oz
- Sensitivity: 88 dB
- Voice Coil Size: 1.5" ASV
- Max Power: 300 W
- Impedance: 8 Ohm
- Sold individually



AUDIO

SPEAKER TERMINALS

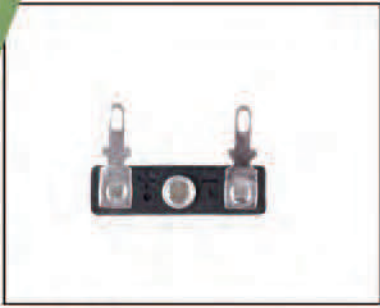

21-242

SPEAKER TERMINAL CONNECTOR

- Size: 2mm
- Type: Plug-in Connector



21-243

SPEAKER TERMINAL CONNECTOR

- Size: 4 to 5mm
- Type: Plug-in Connector



T-110

SPEAKER TERMINAL

- Size: 2 1/8"
- Type: Push-in



T-200

SPEAKER TERMINAL (COLOR CODED)

- Size: 3 3/4" x 3"
- Type: Screw-in



T-235G

SPEAKER TERMINAL (GOLD)

- Size: 3 3/4" x 3"
- Type: Screw-in



TE-30

SPEAKER TERMINAL

- Size: 2 1/8"
- Type: Screw-in



TE-40

SPEAKER TERMINAL

- Size: 2 1/4" x 2 1/4"
- Type: Screw-in



TE-50

SPEAKER TERMINAL

- Size: 2 1/2" x 3"
- Type: Screw-in

AUDIO

SPEAKER TERMINALS




NB-506 (2P)
NB-507 (4P)
SPRING TENSION
• Color coded



X-425SQ
SPEAKER TERMINAL
• Size: 100mm X 84mm
• Type: Double SPKN and Double 1/4 Terminal



X-825
2 SPKN AND
2 1/4" Sockets
• 7" x 5"
• Without Crossover



X-870
2 SPKN
• 2 1/4" Sockets
• 7" x 5"
• With Crossover



XT-200
DOUBLE SPKN TERMINAL



XT-2214
DOUBLE SPKN
• Double 1/4" Terminal



XK-862
TERMINAL BOARD
• Length: 136 cm
• Width: 89 mm
• Weight: 95 g



XK-862-1
TERMINAL BOARD
• Length: 136 cm
• Width: 89 mm
• Weight: 95 g



XK-863-1
TERMINAL BOARD
• Length: 179 cm
• Width: 126 mm
• Weight: 250 g

AUDIO

SPEAKER TERMINALS



T-37 BLACK
T-37 RED
TERMINAL BINDING POST



NB-117B (Black)
NB-117R (Red)
BANANA PLUG
• Dual Mini Plug



NB-417B (Black)
NB-417R (Red)
BANANA PLUG
• Dual



T-300J
TERMINAL
• 2 1/4" Jacks



T-500
T-500J (Two 1/4" jacks)
TERMINAL WITH GOLDEN-PLATING
• 4"
• Gold Ends
• Two 1/4 jacks



T-700G
TERMINAL
• 3 1/8" x 3 1/8"
• Gold Post

TERMINAL BINDING POST- GOLD




T-707G
TERMINAL
• 3 3/4" x 4 7/8"
• Gold Post

TERMINAL BINDING POST- GOLD

AUDIO

SPEAKER TERMINALS

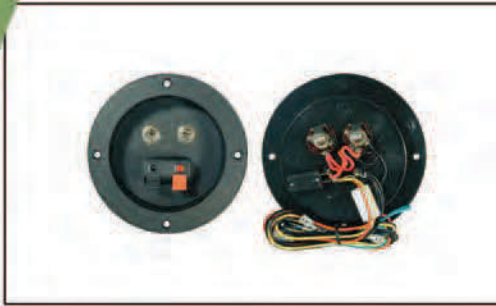

TCR-100R

SPEAKER TERMINAL


- Size: 4-1/2"
- Type: 2 1/4" Jacks with crossover



TCR-200

SPEAKER TERMINAL


- Size: 3-1/4" x 4"
- Type: 2 1/4" Jacks without crossover

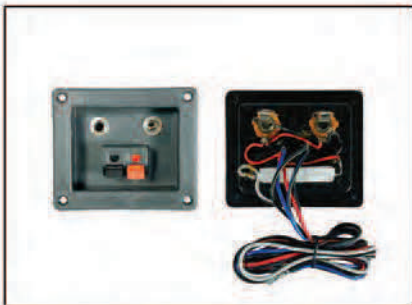

TCR-200SQ

SPEAKER TERMINAL

- Size: 3-1/4" x 4"
- Type: 2 1/4" Jacks with crossover

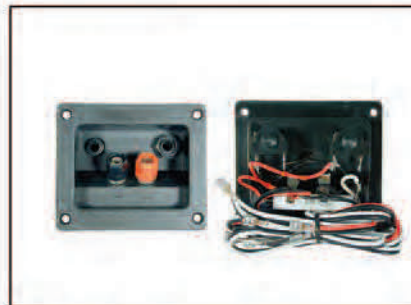

TCR-275SQ

SPEAKER TERMINAL

- Size: 3 1/4" x 3 3/4"
- 2 1/4" Jacks with crossover



TCR-300R

SPEAKER TERMINAL

- Size: 3"
- Type: 3 Way with crossover



TE-22G

SPEAKER TERMINAL

- 2" x 2"
- Push-in Type with gold post




TE-24G

SPEAKER TERMINAL

- 2" x 2"
- Screw-in Type gold post

AUDIO


SPEAKER CROSSOVER

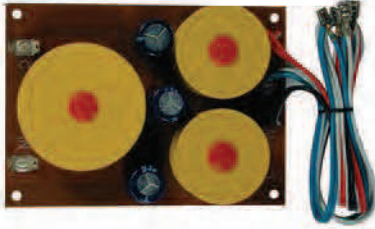

801

3-WAY CROSSOVER


- Frequency Response: 2.5K-5KHz
- Power RMS/Max: 75/150W
- Impedance: 8 Ohm

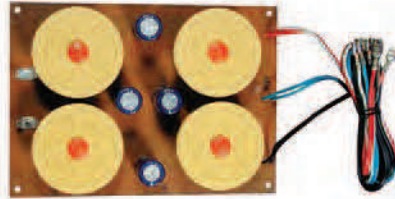

1001

3-WAY CROSSOVER


- Frequency Response: 2.5K-5KHz
- Power RMS/Max: 100/200W
- Impedance: 8 Ohm

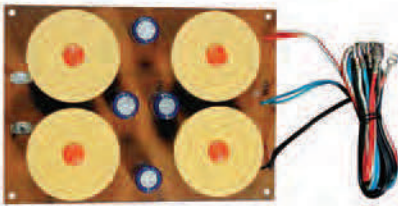

1201

3-WAY CROSSOVER


- Frequency Response: 2.5K-5KHz
- Power RMS/Max: 125/250W
- Impedance: 8 Ohm

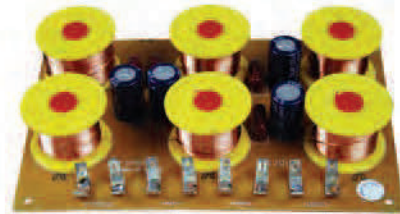

1501

3-WAY CROSSOVER

- Frequency Response: 2.5K-5KHz
- Power RMS/Max: 175/350W
- Impedance: 8 Ohm



HC-101

1 CHANNEL SUBWOOFER CROSSOVER

- Frequency Response: 120Hz Low Pass
- Power RMS/Max: 200/400W
- Impedance: 4 Ohm



HC-303

3-WAY CROSSOVER

- Frequency Response: 2.5K-5KHz
- Power RMS/Max: 75/150W
- Impedance: 8 Ohm

AUDIO

VOICE COIL

KVA-60 (for NWA-1260 & NWA-1560)

KVA-90 (for NWA-1290 & NWA-1590)

KVA-100 (for NWA-15100)

KVA-100D (for NWA-15100D & NWA-135D)

KVA-800 (for NWA-18100)

KAPTON VOICE COIL



KVC-1 (1", 12mm)

KVC-1.5 (1.5", 14mm)

KVC-2 (2", 18mm)

KVC-2.5 (2.5", 20mm)

KVC-3 (3", 24mm)

KVC-4 (4", 24mm)

KAPTON VOICE COIL



NVC-26 (1", 26mm)

NVC-38 (1.5", 38mm)

NVC-44 (2", 44mm)

NVC-51 (2.5", 51mm)

NVC-63 (3", 63mm)

NVC-77 (4", 77mm)

NVC-100 (4", 100mm)

KAPTON VOICE COIL



NSDV-4000USA

REPLACEMENT VOICE COIL

• For NTX-4000USA



NSDV-3000

REPLACEMENT VOICE COIL

• For NTX-3000



NSDV-3500

REPLACEMENT VOICE COIL

• For NDX-3520, NDX-3540 & NDX-3580



NSDV-417

REPLACEMENT VOICE COIL

• For NTX-417



NSDV-420

REPLACEMENT VOICE COIL

• For NTX-420 & NTX-410



NSDV-6720

REPLACEMENT VOICE COIL

• For NDX-6720



NSDV-6740

REPLACEMENT VOICE COIL

• For NDX-6740

AUDIO

REPLACEMENT ACCESSORIES

GK-8 (for 8")
 GK-10 (for 10")
 GK-12 (for 12")
 GK-15 (for 15")
 GK-18 (for 18")
 GK-69 (for 69")
 GASKET



NCE-10 (for 10")
 NCE-12 (for 12")
 NCE-15 (for 15")
 CLOTH EDGE
 • Speaker Foam Repair



NFE-4 (for 4") | NFE-4.5 (for 4.5")
 NFE-5 (for 4") | NFE-6 (for 6")
 NFE-196-7 (196mm for 4")
 NFE-228-186 (228mm for 6x9")
 NFE-243-8 (243mm for 10")
 NFE-298-9 (298mm for 12")
 NFE-368-9 (368mm for 15")
 FOAM EDGE



NDC-72 (72mm) | NDC-212 (2-1/2" Black)
 NDC-90 (90mm) | NDC-216S (2-11/16" Silver)
 NDC-116 (116mm) | NDC-336 (3-3/16" Black)
 NDC-124 (124mm) | NDC-396S (3-9/16" Silver)
 NDC-140 (140mm) | NDC-400 (4" Black)
 NDC-150 (150mm) | NDC-400S (4" Silver.)
 DUST CAP | DUST CAP



NPC-4 (4")
 NPC-5 (5")
 NPC-6 (6")
 PAPER CONE WITH FOAM EDGE
 • 196mm
 • 1-1/2" Center Core



NPC-196
 PAPER CONE W/FOAM EDGE FOR 8"
 • 196mm
 • 1" center core
 NPC-243
 PAPER CONE W/FOAM
 • 243mm
 • 1" center core



NPC-228
 PAPER CONE W/FOAM EDGE
 • 228mm
 • For 6"x 9"
 • 1" Center Core



NPC-298
 RIBBED PAPER CONE WITH
 FOAM EDGE
 • 298mm
 • For 12"



NPC-368
 RIBBED PAPER CONE WITH
 FOAM EDGE
 • 368mm
 • For 15"

AUDIO

REPLACEMENT ACCESSORIES



NPC-8CE (8")

NPC-12CE (12")

PAPER CONE
W/CLOTH EDGE

- Center Core: 1.5" (38.1mm)

NPC-6CE (6")

NPC-10CE (10")

NPC-18CE (18")

PAPER CONE
W/CLOTH EDGE

- Center Core: 1" (25.4mm)



NPC-380CE

PAPER CONE W/CLOTH EDGE

- Diameter: 15" (381mm)
- Center Core: 1.5" (38.1mm)



NPD-10CE

DEEP NON-PRESS PAPER
CONES CLOTH EDGE

- Diameter: 10" (254mm)
- Center Core: 1.5" (38.1mm)



NPD-10F (6")

NPD-15F (15")

DEEP NON-PRESS PAPER CONES FOAM EDGE

- Center Core: 1.5" (38.1mm)



NPD-12CE (12")

NPD-15CE (15")

NPD-18CE (18")

DEEP NON-PRESS PAPER
CONES CLOTH EDGE

- Center Core: 1.5" (38.1mm)

NPD-18CE-SH (18")

SMOOTH CONE
W/CLOTH EDGE

- Diameter: 18" (457.2mm)
- Center Core: 3" (76.2mm)



NPCSQ-10 (10")

SQUARE CONE W/RUBBER EDGE

- Diameter: 10" (254mm)
- Center Core: 1.5" (38.1mm)

AUDIO

REPLACEMENT ACCESSORIES

NSP-110

- SPIDER FOR 8"
• Diameter: 4.5" (110mm)
• Center core: 1" (25.4mm)

NSP-148

- SPIDER FOR 10"
• Diameter: 6" (148mm)
• Center core: 1.5" (38.1mm)

NSP-168

- SPIDER FOR 12"
• Diameter: 6.5" (168mm)
• Center core: 1-3/4"
(44.45mm)

NSP-180

- SPIDER FOR 15"
• Diameter: 7" (180mm)
• Center core: 2" (50.8mm)



NSPSQ-196 (196mm)

- SPIDER
• for 10" square woofers

NSPSQ-200 (200mm)

- SPIDER
• for 10" square woofers

NTX-205

- PIEZO TWEETER ELEMENT
• with cone for NTX-1004PZ



NTX-405

- PIEZO TWEETER ELEMENT
• for NTX-105045 & NTX-1504



YD-200-210-C6M2 (8")

YD-250-211-C6M1 (10")

- UNIVERSAL CLOTH EDGE
• 12.3mm core
• Adjustable Center Core



YD-250-211-M1 (10")

- UNIVERSAL FOAM EDGE
• 13.3mm core
• Adjustable Center Core

YD-300-205-C6M2 (12")

YD-380-98-C6M2 (15")

- UNIVERSAL CLOTH EDGE
• 26.6mm core
• Adjustable Center Core



YD-300-205-M2 (12")

YD-380-98-M2 (15")

- UNIVERSAL FOAM EDGE
• 26.6mm core
• Adjustable Center Core



AUDIO

IN WALL / CEILING SPEAKER



SS-610

2 WAY CEILING SPEAKER

- 6" Woofer IMPP Cone With Rubber Edge
- 10 Oz Magnet
- 1" ASV Coil
- 38 mm
- Silk Tweeter
- 8 Ohm Impedance
- 100 Watt Max Power



SS-810

2 WAY CEILING SPEAKER

- 8" Woofer IMPP Cone With Rubber Edge
- 20 Oz Magnet
- 1" ASV Coil
- 38 mm
- Silk Tweeter
- 8 Ohm Impedance
- 150 Watt Max Power



CS-606

CEILING SPEAKER

- 6"
- 80 Watt
- Plastic Cover
- with Transformer



CS-806

8" PAPER CONE

- 1" voice coil
- 10 Oz magnet
- 8 Ohm impedance
- 10 Watts power handling

CS-507

5 1/4" 2 WAY CEILING SPEAKER

- 5" Woofer IMPP Cone With Rubber Edge
- 10 Oz Magnet
- 1" ASV Coil
- 30 mm
- Silk Tweeter
- 8 Ohm Impedance
- 50 Watt Max Power

CS-607

2 WAY CEILING SPEAKER

- 6" Woofer IMPP Cone With Rubber Edge
- 10 Oz Magnet
- 1" ASV Coil
- 30 mm
- Silk Tweeter
- 8 Ohm Impedance
- 100 Watt Max Power



CS-810

8" PAPER CONE

- 0.75" voice coil
- 8 Oz magnet
- 4 Ohm impedance
- 10 Watts power handling



CS-65115-710V

6 1/2" CEILING SPEAKER

- With 70V/100V Transformer can be adjusted to 5W/10W/15W
- Load rating @ 70V/100V: 15W
- Transformer tapings @ 70V/100V: 15W-10W-5W
- Frequency Range: 50-20KHz
- SPL(@1Watt/1Meter): 90dB
- Impedance: 8 Ohms
- Dimension: Ø9.4"(238mm)
- Install Depth: 3.4"(86mm)
- Material: ABS
- Color: White

CS-85115-710V

8" CEILING SPEAKER

- With 70V/100V Transformer can be adjusted to 5W/10W/15W
- Load rating @ 70V/100V: 15W
- Transformer tapings @ 70V/100V: 15W-10W-5W
- Frequency Range: 40-20KHz
- SPL(@1Watt/1Meter): 92dB
- Impedance: 8 Ohms
- Dimension: Ø10.9"(276mm)
- Install Depth: 3.7"(93mm)
- Material: ABS
- Color: White

GRILL

8" PLASTIC GRILL



CA-400USB

P.A. AMPLIFIER

Input:

- 1 MP3 Player
- 1 USB Port
- 1 SD Port
- 2 Microphones- 42 db 10k / 50k
- 1 Auxiliary- 20 db 10k / 50k

Output:

- Power: 30 Watts Peak, 15 Watts RMS
- Less than 3% THD @ 1KHz
- Speaker Impedance: 4 -16
- Frequency Response: 150Hz- 15KHz
- Power Supply: AC 110/220V,DC 12V

CAR AMPLIFIER with USB 50 Watts RMS Power on/off, MIC 1 / MIC 2/ AUX 1/4 " PLUGS Inputs/volume controls, Removable AC Cord, Power Input: AC 110V 150HZ.



CA-645ST

P.A. AMPLIFIER

Input:

- 1 Auto Stop Cassette Deck
- 2 Microphone - 42 db 10K / 50K
- 1 Auxiliary - 20db 10 / 50K

Output:

- Power: 18 Watts Peak
- Less than 3% THD @ 1KHz
- Speaker Impedance: 4 - 16
- Frequency Response: 150Hz - 150KHz
- Power Supply: AC 110V, DC 12V



Audio

MEGAPHONES

SK-33S

POWER MEGAPHONE

- Output: 30 Watts
- Power Source: Uses 6 x D batteries
- Horn Diameter: 8" (205mm)
- Material: ABS Plastic



ER-100G

HANDY MEGAPHONE

- Output: 10 Watts
- Power Source: SUM-1 (Size D) Cell 4 pcs.
- Horn Diameter: 6" (160mm)
- Material: ABS Plastic



ER-370D

HANDY MEGAPHONE

- Output: 25 Watts
- Power Source: UM 1 x 6
- Horn Diameter: 7.5" (190mm)
- Material: ABS Plastic



ER-670D

HANDY MEGAPHONE

- Output: 50 Watts
- Power Source: UM 2 x 8 or UM 1 x 8
- Horn Diameter: 230mm
- Material: ABS Plastic



AUDIO

MEGAPHONES

ER-471

MEGAPHONE WITH USB

- 35 Watts Megaphone
- Emergency siren
- Built in Recorder
- Megaphone with emergency siren
- Records and continuously repeats your voice
- With removable microphone
- Volume Control
- 6D size batteries
- ABS material, highly resistance
- 110-220V rechargeable battery
- Recorder
- Siren



ER-771

MEGAPHONE WITH EMERGENCY SIREN

- 50 Watts Megaphone
- Emergency siren
- Built in Recorder
- Megaphone with emergency siren
- Records and continuously repeat your voice
- With removable microphone
- Volume Control
- 8 D size batteries
- ABS material, highly resistance
- 110-220V rechargeable battery
- Recorder
- Siren
- 12V input



ER-991

MEGAPHONE WITH USB SD AND MP3 PLAYER

- 50 Watts Megaphone
- Lithium Battery
- Megaphone with emergency siren
- High impact ABS material
- Emergency siren (2 optional melody)
- Recordable function (Records and continuously repeats)
- External Microphone
- 8 type C batteries (not included)
- 12V input
- Original Cable
- Carrying strap
- Reaches a maximum of 1500 meter
- 110-220V Rechargeable Battery



AUDIO

P.A. HORN SPEAKER



H-16D (16")

H-20 (20")

- Round
- Without driver
- Metal



HS-405115-710V

HORN SPEAKER

- 12.4"x8.2"x14.5"
- With 70V/100V Transformer can be adjusted to 5W/10W/15W
- Load rating: 15W
- Impedance: 8 Ohms
- Protection Type: IP 66



NAH-158 (Ivory marfil)

H-158D

- 15" X 8" TRUMPET HORN
- Rectangle
- Without driver



NAH-16 (16", Ivory marfil)

NAH-20 (20", Ivory marfil)

- ROUND TRUMPET HORN IVORY
- Without Driver



TC-604-25

6X4" HORN SPEAKER

- Dimensions: 6"x4"
- Max Power: 25W
- Impedance: 8 Ohm
- Frequency Range: 250~7000Hz
- Sensitivity: 105dB



TC-25

8" 4.5" Horn

- Frequency Range: 250Hz-8KHz
- RMS/Max Power: 40/80W
- Impedance: 8 Ohms



TC-35S

12 VOLT SIREN

- Frequency Response: 350 ~ 9,000 Hz
- RMS/Max Power: 10/20W
- Impedance: 8 Ohms



TC-55

POWERHORN

- Frequency Response: 350Hz-9KHz
- RMS/Max Power: 50/100W
- Impedance (Nominal): 8 Ohms

AUDIO

P.A. HORN SPEAKER

TC-305

12" HORN SPEAKER

- Material: Aluminum
- Bracket: Steel
- Power: 40W (RMS)
- Impedance: 8 Ohm
- Frequency Response: 300-7000 Hz
- Dimension: 309(D)x286(L) mm [12"x11"]



NAH-06D

6" HORN SPEAKER ROUND, WITH DRIVER

- Max Power: 50 Watts
- Impedance: 8Ω
- Frequency Range: 400-7000Hz
- Sensitivity: 110dB



TC-1108T

P.A. HORN SPEAKER

- Horn Material: ABS
- Throat: Aluminum
- Bracket: Steel
- Diaphragm: Phenolic
- IP Rating: 65
- Power: 30W RMS, 60W Max
- Impedance: 8Ω
- Freq Range: 300-8000Hz
- SPL@1W/1M: 110dB
- Voice Coil: 38 KSV
- Magnet: 3.1" x 1.6" x 0.6" (80 x 40 x 15mm)
- Dimension: 11.4"(W) x 8.4"(H) x 11.5"(L) (290 x 213 x 293mm)
- Weight: 4.4Lbs (2Kg)



TC-1712T

P.A. HORN SPEAKER

- Horn Material: ABS
- Throat: Aluminum
- Bracket: Steel
- IP rating: 65
- Power: 50W RMS, 100W Max
- Impedance: 16Ω
- Fre. Res.: 200-10000Hz
- SPL@1W/M: 112dB
- Diaphragm: Phenolic
- Voice Coil: 51.6 KSV
- Magnet: 4.3"x2.4x0.8"(110x60x20mm)
- Dimension: 15.9"x10.3"x13"(404x262x329mm)
- Weight: 7.9lbs(3.58KG)



AV-1006

4" 6 TONE SIREN

- Operation Power: 12V, 35W
- Sensitivity: 119dB± 3db
- Impedance: 8 Ohms
- Max. Power: 35Watt



SI-55S

PA SIREN

- Frequency Range: 300-5000Hz
- Sensitivity: 115-122dB
- 80 Watts
- 8 Ohm



SI-77S

ELECTRONIC SIREN

- 100 Watts
- 8 Ohm
- 12V DC ± 10%



CA-50WS

SECURITY PA AMPLIFIER

- Power: 100 Watts
- Frequency Range of Microphone: 420Hz - 1780Hz
- 12V, 7.5A
- With Microphone & 6 Sounds



CA-77WS

SECURITY PA AMPLIFIER

- Power: 100 Watts
- Impedance: 8 Ohm
- 12V
- With Microphone & 6 Siren Sounds



AUDIO

P.A. HORN SPEAKER



NAD-60

60 WATTS DRIVER UNIT IVORY

- Frequency Response: 180-5000Hz
- RMS/Max Power: 60/120W
- Impedance: 16 Ohms
- Voice Coil: 51.6mm (2") Til



NAD-100

100 WATTS DRIVER UNIT IVORY

- Frequency Response: 180-500Hz
- RMS/Max Power: 100/200W
- Impedance: 16 Ohms
- Voice Coil: 51.6mm (2") Til



TD-60

DRIVER UNIT

- Frequency Response: 180-5000Hz
- RMS/Max Power: 60/120W
- Impedance: 16 Ohms
- Voice Coil: 51.6mm (2") Til



TD-100

DRIVER UNIT

- Rated Input: 100W RMS. / 200W Max
- Impedance: 16 Ohm
- S.P.L. (1W/M): 110 dB
- Freq. Response: 180-5000 Hz
- Voice Coil: 51.6mm (2") til
- Magnet: 120 x 60 x 20 mm



TD-200

DRIVER UNIT

- Frequency Response: 160-6000Hz
- RMS/Max Power: 150/300W
- Impedance: 16 Ohms
- Voice Coil: 66KSV



TDO-100

DRIVER UNIT

- Frequency Response: 500-3000Hz
- RMS/Max Power: 50/100W
- Impedance: 16 Ohms
- Voice Coil: 51.6mm (2") Til



U-60 (60W)

U-100F (100W)

U-100F OD (100W)

U-200 (200W)

VOICE COILS FOR P.A. DRIVERS

AUDIO

AIR TUBES



HA-12

ECONOMIC TYPE

- 2-1/8" wide
- 1" deep
- Economy



HA-24

- Heavy duty cabinet lock
- 3-1/2" x 3-1/2"



HA-35

DEEP AIR TUBE

- 2-3/4" wide
- 4-3/4" deep

HA-15A

HA-15B (with grill)

- AIR TUBE
- 2" wide
 - 2.5" deep

HA-15D

AIR PORT TUBE

- 4" wide
- 4.5" deep

HA-15E

AIR PORT TUBE

- 6" wide
- 6" deep



HA-5275

AIR PORT TUBE WITH GRILL

- 2.75" wide
- 5" deep

AUDIO

NIKEL AIR TUBES / BASS AIR PORT

HA-18NK (5" deep)

AIR TUBE

- 4" wide
- Nickel



HA-5412

AIR TUBE

- 3" Wide
- 12" Deep
- Nickel
- Long So You Can Cut to Size



HA-54

AIR TUBE

- 3" wide
- 3" deep
- Nickel



HA-OVA

OVAL AIR PORT

- 5" x 1"
- Black & silver plastic



HA-TRI

TRIANGULAR AIR PORT

- 3" x 4-1/8"
- Black plastic

AUDIO

FANS



12-0715

DC FAN MOTOR

- 12V
- 1 1/2" x 1 1/2" x 3/4"



12-1030

DC FAN BRUSHLESS

- 12V
- 3" x 3" x 1"



12-1545

LUDGER FAN

- 12V 0.30A
- 50/60Hz 0.14A
- Impedance protected



12-2323

PLASTIC FAN

- 12V
- 2 3/8" x 2 3/8" x 8 7/8"
- 60mm x 60mm x 225mm



24-3131

LUDGER FAN

- 24V 0.11A
- Impedance protected



110-1032

DC FAN BRUSHLESS

- 1" x 1" x 3/8"
- 110V



110-1545

MINI FAN

- 4 1/2" x 4 1/2" x 1 1/2"
- 110V



FAN-33

EXTREMELY EFFICIENT

- 2.35 Square Inches x 1"
- 28 Cubic Feet per Minute
- 12V 0.8A



FAN-55

EXTREMELY EFFICIENT

- 4.65 Square Inches x 1.5"
- 106 Cubic Feet per Minute
- 12V 1.0A

AUDIO

GRILLS

GLKT-8

SPEAKER GRILL
• 2 GR-8, 8 NP-1 & 8 NSC-001

GLKT-10


SPEAKER GRILL
• 2 GR-10, 8 NP-1 & 8 NSC-001

GLKT-12

SPEAKER GRILL
• 2 GR-12, 8 NP-1 & 8 NSC-001

GLKT-15

SPEAKER GRILL
• 2 GR-15, 8 NP-1 & 8 NSC-001

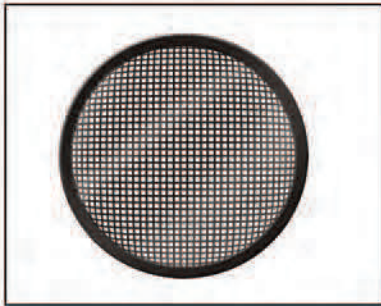

GP-8 (8")
GP-10 (10")
GP-12 (12")
SPEAKER GRILL
• Plastic grill
• Perfect grill marine or humid environments



GR-5 (5")
GR-5.25 (5.25")
GR-5.5 (5.5")
GR-6 (6")
GR-6.5 (6.5")
GR-8 (8")
GR-10 (10")
GR-12 (12")
GR-15 (15")
GR-18 (18")
SPEAKER GRILL
• Clipless
• For speakers and woofers




GR-969
SPEAKER GRILL
• Spare 6" x 9" grill



GT-4.5 (4.5")
GT-6.5 (6.5")
GT-8 (8")
GT-10 (10")
GT-12 (18")
GT-15 (15")
SPEAKER GRILL
• 2 Piece metal grill
• Perfect for custom type installations

FGR-3131 (3-1/8" x 3-1/8")
FGR-3737 (3.7" x 3.7")
FGR-4747 (4.7" x 4.7")
FAN GRILL
• Metal

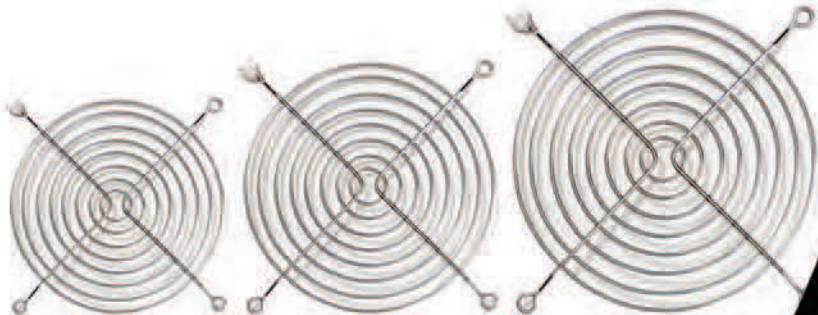


AUDIO

MESH GRILLS / FOAMS

GR-24BK

- FULL MESH GRILL
• 2' x 4' x 1.2mm
• Black finish

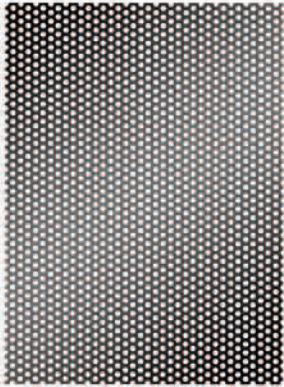


GR-24NC

- FULL MESH GRILL
• 2' x 4' x 1.2mm
• Nickel finish




GR-24HCB

- FULL MESH GRILL
• 2' x 4' x 1.2mm
• Black finish
• Honeycomb mesh

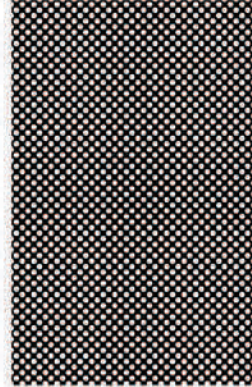


GR-35BK

- FULL MESH GRILL
• 3' x 5' x 1.2mm
• Black finish

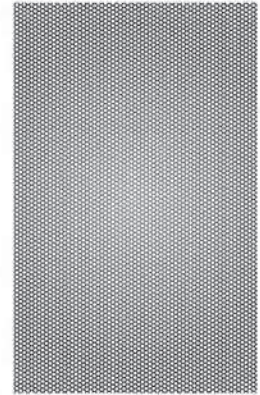

GR-44BK

- FULL MESH GRILL
• 4'x4' 1.2mm
• Black finish



GR-24FOAM

- ACOUSTIC GRILL FOAM
• 2' x 4'
• Thickness: 0.40"



GR-2400SP

- SPEAKER CABINET STEEL
MESH GRILL
• 2' x 4' x 1.2mm
• Lined with a black
foam insulation



GR-3500SP

- SPEAKER CABINET STEEL
MESH GRILL
• 3' x 5' x 1.2mm
• Lined with a black
foam insulation



Audio

CABINET CORNER PROTECTORS

HA-30

CABINET CORNER PROTECTOR

- 2"
- Enclosure
- Black finish



HA-32

CABINET CORNER PROTECTOR

- 3" x 2"
- Black finish



HA-40BK (1" x 1")

HA-45BK (2" x 1.5")
THREE LEG METAL CABINET
CORNER PROTECTOR

- 2" x 1.5"
- Black metal finish



HA-47A (Right)

HA-47B (Left)

METAL CABINET CORNER

- Black finish

Metal high quality cabinet corner protectors adds style and durability to any project.



HA-48BK

HA-48NL

METAL CABINET CORNER

- 1.5" x 1.5"
- Black or Nickel finish



HA-50

CABINET CORNER

- 3"
- Enclosure
- Black finish



HA-51

CABINET CORNER

- 2" x 2"
- Only 2 screw holes for faster & more economical installation
- Black finish



HA-53

PLASTIC CABINET CORNER

- 5" x 3"
- Black finish



HA-212NL

METAL CABINET CORNER

- Weight: 30 g
- 40mm
- 90°
- Nickel finish



HA-214BK

HA-214NL

- Metal cabinet corner
- Weight: 50 g
- 50mm
- 90°
- Black or Nickel finish



HA-215NL

- Metal cabinet corner
- Weight: 70 g
- 65mm
- 90°
- Nickel finish



HA-215-1NL

- Metal cabinet corner
- Weight: 30 g
- 40mm
- 90°
- Nickel finish



AUDIO

CABINET HANDLES

HA-10

POCKET ENCLOSURE
• 5.5" x 3.5"



HA-100BK (Black color)

HA-100NL (Nickel color)
SPRING SURFACE
• 5.5" x 3.5"



HA-1062

ABS RECESSED ROUND HANDLE
• 10" (H) x 6" (W) x 2.5" (D)



HA-20

CARRYING BELT
• 10" x 1"



HA-200BK (Black color)

HA-200NL (Nickel color)
RECESSED FLIP HANDLE BLACK
• 6.25" x 4.25"
• Spring surfaces



HA-300

METAL CABINET HANDLES
• 9" x 7"



HA-350

LARGE RECESSED HANDLE
• 9" x 7"
• Plastic



HA-40BK

PLASTIC HANDLE
• 5" x 2.5"



HA-400

LARGE RECESSED METAL HANDLE
• 10.75" x 6.5"



HA-550

METAL HANDLE
• 6.25" x 6.5 x 5.5"



HA-762

ABS RECESSED ROUND HANDLE
• 7.5" (H) x 6" (W) x 2.5" (D)



HA-819-2

PLASTIC HANDLE
• 210mm x 160mm



AUDIO

CABINET LOCKS



HA-15

RUBBER CABINET FOOT




HB-10

HB-10CHR (CHROMO)


PADLOCKING DRAWBOLT

- Draw bolt

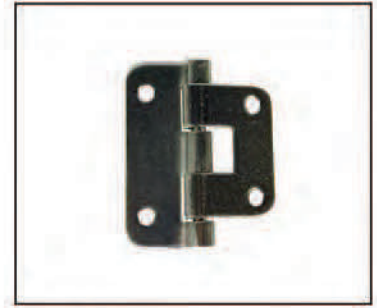

HB-20

LIFT OFF HINGE

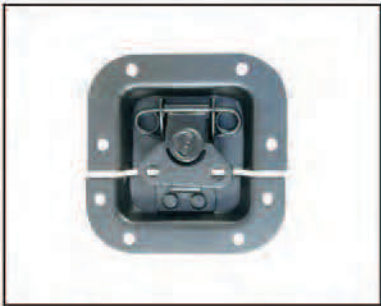

HB-44

HEAVY DUTY CABINET LOCK

- Heavy duty cabinet lock
- 3-1/2" x 3-1/2"



HB-55

CABINET HEAVY DUTY LOCK

- Heavy duty cabinet lock
- 4-1/8" x 4"



HL-544

HEAVY DUTY LOCK

- 6-3/4" x 5"
- Black



HR-500

SCREW TYPE WHEEL

- Caster



HR-600

SCREW TYPE LONG WHEEL

- Screw type
- Long wheel caster

AUDIOPIPE PRO DJ

PROFESSIONAL POWER AMPLIFIERS

AQ-900

PROFESSIONAL POWER AMPLIFIER

- Max power: 900W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20 Hz - 20kHz: 10 dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 20 Hz-20 kHz (± 1 dB), 5 Hz-50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 100, 120, 240 VAC, 50-60 Hz
- Input sensitivity at 8 ohms: 1.15V (+3.4 dBu)
- Voltage gain: 31.6 x (30 dB)
- Output circuit: AB
- Power requirements 1/8 power pink noise at 4 ohms: 5A

8 ohms 20 Hz-20 kHz, 1% THD	200W
4 ohms 20 Hz-20 kHz, 1% THD	300W
2 ohms 1 kHz, 1% THD	450W
8 ohms 20 Hz-20 kHz, 1% THD	600W
4 ohms EIA 1 kHz, 1% THD	900W
Input Sensitivity @ 8ohms	100dB
Signal to Noise, 20 Hz ~20 kHz	1.15V(+3.4dBu)
Voltage Gain	31.6x (30dB)
Output Circuitry	AB
Power Requirements 1/8 power pink noise at 4 ohms	5A



AQ-1500

PROFESSIONAL POWER AMPLIFIER

- Max power: 1500W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20 Hz - 20kHz: 10 dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 20 Hz-20 kHz (± 1 dB), 5 Hz-50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 100, 120, 240 VAC, 50-60 Hz
- Input sensitivity at 8 ohms: 1.15V (+3.4 dBu)
- Voltage gain: 40 x (32 dB)
- Output circuit: AB
- Power requirements 1/8 power pink noise at 4 ohms: 6A

8 ohms 20 Hz-20 kHz, 1% THD	300W
4 ohms 20 Hz-20 kHz, 1% THD	460W
2 ohms 1 kHz, 1% THD	750W
8 ohms 20 Hz-20 kHz, 1% THD	950W
4 ohms EIA 1 kHz, 1% THD	1500W
Input Sensitivity @ 8ohms	100dB
Signal to Noise, 20 Hz ~20 kHz	1.15V(+3.4dBu)
Voltage Gain	40x (32dB)
Output Circuitry	AB
Power Requirements 1/8 power pink noise at 4 ohms	6A



AUDIOPIPE PRO DJ

PROFESSIONAL POWER AMPLIFIERS

AQ-2000

PROFESSIONAL POWER AMPLIFIER

- Max power: 2000W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20Hz - 20kHz: 10 dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 20 Hz-20 kHz (± 1 dB), 5 Hz-50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 100, 120, 240 VAC, 50-60 Hz
- Input sensitivity at 8 ohms: 1.15V (+3.4 dBu)
- Voltage gain: 40 x (32 dB)
- Output circuit: AB
- Power requirements 1/8 power pink noise at 4 ohms: 6A

	430W
4 ohms 20 Hz-20 kHz, 1% THD	600W
2 ohms 1 kHz, 1% THD	1000W
8 ohms 20 Hz-20 kHz, 1% THD	1200W
4 ohms EIA 1 kHz, 1% THD	2000W
Input Sensitivity @ 8ohms	100dB
Signal to Noise, 20 Hz -20 kHz	1.16V(+3.5dBu)
Voltage Gain	46x (33dB)
Output Circuitry	Class H
Power Requirements 1/8 power pink noise at 4 ohms	6A



AQ-2500

PROFESSIONAL POWER AMPLIFIER

- Max power: 1500W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20 Hz - 20kHz: 10 dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 20 Hz-20 kHz (± 1 dB), 5 Hz-50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 100, 120, 240 VAC, 50-60 Hz
- Input sensitivity at 8 ohms: 1.15V (+3.4 dBu)
- Voltage gain: 40 x (32 dB)
- Output circuit: AB
- Power requirements 1/8 power pink noise at 4 ohms: 6A

8 ohms 20 Hz-20 kHz, 1% THD	530W
4 ohms 20 Hz-20 kHz, 1% THD	800W
2 ohms 1 kHz, 1% THD	1250W
8 ohms 20 Hz-20 kHz, 1% THD	1600W
4 ohms EIA 1 kHz, 1% THD	2500W
Input Sensitivity @ 8ohms	100dB
Signal to Noise, 20 Hz -20 kHz	1.23V(+4.0dBu)
Voltage Gain	50x (34dB)
Output Circuitry	Class H
Power Requirements 1/8 power pink noise at 4 ohms	7A



AUDIOPIPE PRO DJ

PROFESSIONAL POWER AMPLIFIERS

AQ-3500

PROFESSIONAL POWER AMPLIFIER

- Max power: 3500W
- Signal to noise ratio: 20Hz - 20kHz:100 dB
- Distortion (typical)
20 Hz - 20kHz: 10 dB below rated power - less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power - less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 10 Hz-20 kHz (-1dB), 5Hz - 50 kHz (-3dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 120V AC
- Input sensitivity at 8 ohms: 1.25V (+4dBu)
- Voltage gain: 36dB for 8 ohms load
- Output circuit: AB-H
- Circuit breaker: 12A

2 ohms EIA: 1 kHz, 0.1% THD	1500W + 1500W
4 ohms EIA: 1 kHz, 0.1% THD	1100W + 1100W
8 ohms EIA: 1 kHz, 0.1% THD	650W + 650W
8 ohms EIA: 1kHz, 0.1% THD	2200W
4 ohms EIA: 1 kHz, 0.1% THD	3000W
Input Sensitivity @ 8ohms	1.25V (+4dBu)
Signal to Noise, 20 Hz ~20 kHz	100dB
Voltage Gain	36dB for 8 Ohms Load
Output Circuitry	AB-H
Power Requirements 1/8 power pink noise at 4 ohms	110V AC



AQ-5500

PROFESSIONAL POWER AMPLIFIER

- Max power: 5500W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20 Hz - 20 kHz: 10dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 10 Hz - 20 kHz (-1 dB), 5 Hz - 50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 120V AC
- Input sensitivity at 8 ohms: 1.42V (+5dBu)
- Voltage gain: 36dB for 8 ohms load
- Output circuit: AB
- Circuit breaker: 18A

2 ohms EIA: 1 kHz, 0.1% THD	2500W + 2500W
4 ohms EIA: 1 kHz, 0.1% THD	1800W + 1800W
8 ohms EIA: 1 kHz, 0.1% THD	1100W + 1100W
8 ohms EIA: 1kHz, 0.1% THD	3600W
4 ohms EIA: 1 kHz, 0.1% THD	5000W
Input Sensitivity @ 8ohms	1.42V (+5dBu)
Signal to Noise, 20 Hz ~20 kHz	100dB
Voltage Gain	36dB for 8 Ohms Load
Output Circuitry	AB-H
Power Requirements 1/8 power pink noise at 4 ohms	110V AC



AUDIOPIPE PRO DJ

PROFESSIONAL POWER AMPLIFIERS

AQ2-902

PROFESSIONAL POWER AMPLIFIER

- Max power: 900W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20 Hz – 20 kHz: 10dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 20 Hz – 20 kHz (-1 dB), 5 Hz – 50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 220VAC, 50Hz
- Input sensitivity at 8 ohms: 1.15V (+3.4dBu)
- Voltage gain: 31.6 x (30 dB)
- Output circuit: AB
- Power requirements 1/8 power pink noise at 4 ohms: 5A

	200W
	300W
2 ohms 1 kHz, 1% THD	450W
8 ohms 20 Hz-20 kHz, 1% THD	600W
4 ohms EIA 1 kHz, 1% THD	900W
Input Sensitivity @ 8ohms	100dB
Signal to Noise, 20 Hz -20 kHz	1.15V(+3.4dBu)
Voltage Gain	31.6x (30dB)
Output Circuitry	AB
Power Requirements 1/8 power pink noise at 4 ohms	5A



Included cable for Europe, Australia, Great Britain, and American plugs

220V



AQ2-1502

PROFESSIONAL POWER AMPLIFIER

- Max power: 1500W
- Signal to noise ratio: 20 Hz - 20 kHz:100 dB
- Distortion (typical)
20 Hz – 20 kHz: 10dB below rated power- less than 0.03% THD, 4 and 8 ohms
1.0 kHz and below: full rated power- less than 0.03% THD, 4 and 8 ohms
- Input impedance: 10k ohms unbalanced, 20k ohms balanced
- Frequency response: 20 Hz – 20 kHz (-1 dB), 5 Hz – 50 kHz (-3 dB)
- Cooling: continuously variable-speed fan, rear-to-front air flow
- Power requirements: 220VAC, 50Hz
- Input sensitivity at 8 ohms: 1.15V (+3.4dBu)
- Voltage gain: 40 x (32 dB)
- Output circuit: AB
- Power requirements 1/8 power pink noise at 4 ohms: 6A

8 ohms 20 Hz-20 kHz, 1% THD	300W
4 ohms 20 Hz-20 kHz, 1% THD	460W
2 ohms 1 kHz, 1% THD	750W
8 ohms 20 Hz-20 kHz, 1% THD	950W
4 ohms EIA 1 kHz, 1% THD	1500W
Input Sensitivity @ 8ohms	100dB
Signal to Noise, 20 Hz -20 kHz	1.15V(+3.4dBu)
Voltage Gain	40x (32dB)
Output Circuitry	AB
Power Requirements 1/8 power pink noise at 4 ohms	6A



Included cable for Europe, Australia, Great Britain, and American plugs

220V



AUDIOPIPE PRO DJ

PROFESSIONAL POWER AMPLIFIERS

AQ2-2002

PROFESSIONAL POWER AMPLIFIER

- Max power: 2000 Watts
- Input Sensitivity at 8 Ohms: 1.16V (+3.5 dBu)
- Voltage Gain: 46 x (33 dB)
- Output Circuitry: Class H
- Power Requirements 1/8 Power Pink Noise at 4 Ohms: 6A
- Signal to noise, 20 Hz - 20 kHz: 100 dB
- Distortion (Typical) 20 Hz - 20 kHz: 10 dB below rated power
Less than 0.03% THD, 4 and 8 Ohms 1.0 kHz and below: full rated power - Less than 0.03% THD, 4 and 8 Ohms
- Input Impedance: 10K Ohms unbalanced, 20K Ohms balanced
- Frequency Response: 20 Hz - 20 kHz, ± 1 dB
-3 dB points: 5 Hz - 50 kHz
- Cooling: Continuously variable-speed fan, rear-to-front air flow
- Power Requirements: 220 VAC, 50 Hz

220 



Australia/China



North America



Europe



Great Britain

Included cable for Europe, Australia, Great Britain, and American plugs



AQ2-2502

PROFESSIONAL POWER AMPLIFIER

- Max power: 2500 Watts
- Input Sensitivity at 8 Ohms: 1.23V (+4.0 dBu)
- Voltage Gain: 50 x (34 dB)
- Output Circuitry: Class H
- Power Requirements 1/8 Power Pink Noise at 4 Ohms: 7A
- Signal to noise, 20 Hz - kHz: 100 dB
- Distortion (Typical) 20 Hz - 20 kHz: 10 dB below rated power
Less than 0.03% THD, 4 and 8 Ohms 1.0 kHz and below: full rated power
Less than 0.03% THD, 4 and 8 Ohms
- Input Impedance: 10K Ohms unbalanced, 20K Ohms balanced
- Frequency Response: 20 Hz - 20 kHz, ± 1 dB
-3 dB points: 5 Hz - 50 kHz
- Cooling: Continuously variable-speed fan, rear-to-front air flow

220 



Australia/China



North America



Europe



Great Britain

Included cable for Europe, Australia, Great Britain, and American plugs



AUDIOPIPE PRO DJ

PROFESSIONAL WOOFERS



NWA-1063

10" POWER WOOFER

- Power handling: 400W RMS/ 800W max
- Frequency response: 35-4000Hz
- Sensitivity: 92dB
- Impedance: 8 ohms
- Magnet: 50 oz.
- 3" 2-layer Kapton voice coil
- Vented magnet structure

3" voice Coil



NWA-1263

12" POWER WOOFER

- Power handling: 500W RMS/ 1000W max
- Frequency response: 3.5-4500Hz
- Sensitivity: 93dB
- Impedance: 8 ohms
- Magnet: 60 oz.
- 3" 2-layer Kapton voice coil
- Vented magnet structure

3" voice Coil



NWA-1283

12" POWER WOOFER

- Power handling: 500W RMS/1000W max
- Frequency response: 40-5000Hz
- Sensitivity: 94dB
- Impedance: 8 ohms
- Magnet: 75 oz.
- 3" 2-layer voice coil BASV
- Rigid steel basket

3" voice Coil

AUDIOPIPE PRO DJ

PROFESSIONAL WOOFERS



NWA-15204D

15" POWER WOOFER

- Power handling: 700W RMS/ 1400W max
- Frequency response: 28-2500Hz
- Sensitivity: 98.3dB
- Impedance: 8 ohms
- Magnet: 100 oz.
- 3" 2-layer Kapton voice coil
- Rigid steel basket
- Die cast

3" voice Coil



NWA-15104

15" POWER WOOFER

- Power handling: 600W RMS/1200W max
- Frequency response: 35-4000Hz
- Sensitivity: 93dB
- Impedance: 8 ohms
- Magnet: 100 oz.
- 4" 2-layer Voice coil BASV
- Vented magnet structure

4" voice Coil



NWA-1563

15" POWER WOOFER

- Power handling: 600W RMS/1200W max
- Frequency response: 30-3500Hz
- Sensitivity: 94dB
- Impedance: 8 ohms
- Magnet: 60 oz.
- 3" 2-layer Kapton voice coil
- Vented magnet structure

3" voice Coil



NWA-1593

15" POWER WOOFER

- Power handling: 700W RMS/1400W max
- Frequency response: 30-3500Hz
- Sensitivity: 94dB
- Impedance: 8 ohms
- Magnet: 90 oz.
- 3" 2-layer Kapton voice coil
- Vented magnet structure

3" voice Coil

AUDIOPIPE PRO DJ

PROFESSIONAL WOOFERS



NWA-15204

15" POWER WOOFER

- Power handling: 700W RMS/1400W max
- Frequency response: 35-4500Hz
- Sensitivity: 95dB
- Impedance: 8 ohms
- Magnet: 200 oz.
- 4" 2-layer Kapton voice coil
- Vented magnet structure

4" voice Coil



NWA-18104

18" POWER WOOFER

- Power handling: 700W RMS/1400W max
- Frequency response: 28-3200Hz
- Sensitivity: 93dB
- Impedance: 8 ohms
- Magnet: 125 oz.
- 4" 2-layer voice coil BASV
- Vented magnet structure

4" voice Coil



NWA-18204

18" POWER WOOFER

- Power handling: 800W RMS/1600W max
- Frequency response: 28-3200Hz
- Sensitivity: 95dB
- Impedance: 8 ohms
- Magnet: 200 oz.
- 4" 2-layer Kapton voice coil
- Vented magnet structure

4" voice Coil



NWA-SP151800

REPLACEMENT SPIDER FOR:

- NWA-15104 & NWA-18104

AUDIOPIPE PRO DJ

INDOOR / OUTDOOR SPEAKERS WATER RESISTANT

ODP-205BK

ODP-205WH

DUAL 5 1/4" SPEAKERS

- Max. power: 100W
- Frequency response: 60-20kHz
- Impedance: 8 ohms
- Sensitivity: 92dB
- 3 year UV resistant housing
- Anti-corrosive aluminum grill, water resistant
- Flashes LED to the music
- Safety belt
- Available in black and white
- Gross Weight: 4.0KG
- Dimension: 205 x 215 x 340mm (8.1"x8.5"x13.4")

OUTDOOR



ODP-650BK

ODP-650WH

6" SPEAKER

- Max. power: 100W
- Frequency response: 70-20kHz
- Impedance: 8 ohms
- Sensitivity: 90dB
- 3 year UV resistant housing
- Anti-corrosive aluminum grill, water resistant
- Flashes LED to the music
- Safety belt
- Available in black and white
- Gross Weight: 3.7KG
- Dimension: 205 x 215 x 314mm (8.1" x 8.5" x 13.4")

OUTDOOR



ODP-650DBT

6.5" MONITOR SPEAKER

- Max Power: 100Watts
- Sensitivity: 90 dB
- Impedance: 4 Ohms
- Frequency Response: 55-20KHz
- 3 Year UV Resistant Housing
- Anti-corrosive Aluminum Grill, Water Resistant
- Gross Weight: 7.9 KG/PAIR
- Dimension: 8.1" x 8.5" x 13.4" (205x215x340mm)
- Audio Power: AC 100-240V

OUTDOOR

Bluetooth®



ODP-800BK

ODP-800WH

8" SPEAKER

- Max. power: 160W
- Frequency response: 60-20kHz
- Impedance: 8 ohms
- Sensitivity: 92dB
- 3 year UV resistant housing
- Anti-corrosive aluminum grill, water resistant
- Flashes LED to the music
- Safety belt
- Available in black and white
- Gross Weight: 5.3KG
- Dimension: 245 x 235 x 360mm (9.5" x 9.3" x 14.2")

OUTDOOR



ODC-830BK

ODC-830WH

8" SPEAKER

- Max. power: 240W
- Frequency response: 45-20kHz
- Impedance: 8 ohms
- Sensitivity: 90dB
- 3 year UV resistant housing
- Anti-corrosive aluminum grill, water resistant
- Flashes LED to the music
- Safety belt
- Available in black and white
- Gross Weight: 6.9KG
- Dimension: 290 x 255 x 425 mm (11.4" x 10" x 16.7")

OUTDOOR

BIG BASS



AUDIOPIPE PRO DJ

INDOOR / OUTDOOR SPEAKERS WATER RESISTANT

ODPOV24BK

DUAL 4" MONITOR SPEAKER

OUTDOOR

- Max Power: 80 Watts
- Sensitivity: 92 dB
- Impedance: 8 Ohms
- Frequency Response: 70-20KHz
- 3 Years UV Resistant Housing
- Anti-corrosive Aluminum Grill, Water resistant
- LED flashes to the music
- Available in BLACK and WHITE
- Gross Weight: 2x2.3 KG
- Dimension: 12"x8.1"x6" (305x207x153mm)
- SOLD BY PAIRS



ODP-OV24WH

DUAL 4" MONITOR SPEAKER

OUTDOOR

- Max Power: 80 Watts
- Sensitivity: 92 dB
- Impedance: 8 Ohms
- Frequency Response: 70-20KHz
- 3 Years UV Resistant Housing
- Anti-corrosive Aluminum Grill, Water resistant
- LED flashes to the music
- Available in BLACK and WHITE
- Gross Weight: 2x2.3 KG
- Dimension: 12"x8.1"x6" (305x207x153mm)
- SOLD BY PAIRS



ODP-OV25BK

DUAL 5 1/4" MONITOR SPEAKER

OUTDOOR

- Max Power: 100 Watts
- Sensitivity: 92 dB
- Impedance: 8 Ohms
- Frequency Response: 60-20KHz
- 3 Years UV Resistant Housing
- Anti-corrosive Aluminum Grill, Water resistant
- LED flashes to the music
- Available in BLACK and WHITE
- Gross Weight: 2x3.4 KG
- Dimension: 15.8"x9.8"x7.7" (400x250x195mm)
- SOLD BY PAIRS



ODP-OV25WH

DUAL 5 1/4" MONITOR SPEAKER

OUTDOOR

- Max Power: 100 Watts
- Sensitivity: 92 dB
- Impedance: 8 Ohms
- Frequency Response: 60-20KHz
- 3 Years UV Resistant Housing
- Anti-corrosive Aluminum Grill, Water resistant
- LED flashes to the music
- Available in BLACK and WHITE
- Gross Weight: 2x3.4 KG
- Dimension: 15.8"x9.8"x7.7" (400x250x195mm)
- SOLD BY PAIRS



AUDIOPIPE PRO DJ

CROSSOVERS



CRX-1002K

- Max. Power: 400W
- Impedance: 8 Ohm
- Crossover Freq: 2,000 Hz
- Slope Ratio: 12 dB



CRX-1004K

- Max. Power: 400W
- Impedance: 8 Ohm
- Crossover Freq: 4,000 Hz
- Slope Ratio: 12 dB



CRX-1600

- Max. Power: 1000W
- Impedance: 8 Ohm
- Crossover Freq: 600 Hz
- Slope Ratio: 12 dB

CRX-22K

- Max. power: 600W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 2,000 Hz



CRX-23K

- Max. power: 600W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 3,000 Hz



CRX-3003K

- Max. power: 600W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 375 Hz/ 3,000 Hz



CRX-3005K

- Max. power: 600W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 625 Hz/ 5,000 Hz




CRX-2003KHP

- Max. power: 800W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 3,000 Hz



CRX-3005KHP

- Max. power: 1000W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 625 Hz - 5,000 Hz




AUDIOPIPE PRO DJ

CROSSOVERS

CRX-125HP

- Max. power: 1000W
- Impedance: 4 or 8 Ohm
- Crossover Freq: 125 Hz




CRX-2012K

- Max. Power: 650 Watts
- Impedance: 8 Ohm
- Crossover Freq: 1.2KHz
- Crossover Freq: 650Hz



CRX-D2005KHP

- Max Power: 1000 Watts
- Impedance: 8 Ohms
- Crossover Freq: 5000Hz



CRX-XT2003K

- Max Power: 800 Watts
- Impedance: 8 Ohms
- Crossover Freq: 3000Hz
- Input Connections: Speakon



CRX-203

- 300Watts
- 2 Way Passive Crossover Network



CRX-303

- 300Watts
- 3 Way Passive Crossover Network



CRX-FUSE

- Fuse Lamps
- Output: 12V
- Power 25W
- Dimension: Ø10 x 38mm
- Replaces Fuses for the following models:
CRX-2003KHP & CRX-3005KHP



CRX-FUSE-44

- Fuse Lamps
- Output: 12V
- Power 25W
- Dimension: Ø10 x 44mm



AUDIOPIPE PRO DJ

COMPRESSION DRIVERS



APH-4545-CD

- 70 Watts Power (P.M.P.O.)
- 3.5" Titanium Driver
- Frequency Range: 1K-20KHz
- Sound Pressure: 110dB±2dB
- Voice Coil: 1.3" KSV
- Impedance: 8 Ohms
- Magnet: 12 Oz.



APCD-44FR

- 80 Watts Power (P.M.P.O.)
- 1,500 - 20,000Hz
- 104 dB
- Titanium Diaphragm
- 1.75" Kapton
- 113mm x 15mm Ferrite Magnet
- Magnet: 20 Oz.



APCD-50FR

- 100 Watts Power (P.M.P.O.)
- 1,000 - 20,000Hz
- 105 dB
- Titanium Diaphragm
- 2" Kapton
- 134mm x 17mm Ferrite Magnet
- Magnet: 34.4 Oz.



APCD-78FR

- 400 Watts Power (P.M.P.O.)
- 1,000 - 20,000Hz
- 107 dB
- Titanium Diaphragm
- 3" Kapton
- 156mm x 20mm Ferrite Magnet
- Magnet: 50 Oz.



APCD-940FR

- 180 Watts Power (P.M.P.O.)
- Frequency Response: 650-23,000Hz
- Sensitivity: 115 dB
- Titanium Diaphragm
- 3" Kapton Voice Coil with Flat Wire
- 145mm x 20mm Strontium Magnet
- Magnet: 43 Oz.
- 2" Exit driver



APCD-976FR

- 180 Watts Power (P.M.P.O.)
- Frequency Response: 600-24,000 Hz
- Sensitivity: 110 dB
- Titanium Diaphragm
- 3" Kapton Voice Coil with Flat Wire
- 190mm x 20mm Strontium Magnet
- Magnet: 78 Oz.
- 2" Exit driver




AUDIOPIPE PRO DJ

COMPRESSION DRIVERS



ADR-250

- 150 Watts Power (P.M.P.O.)
- 75 Watts Power (R.M.S.)
- Frequency Response: 400-8000 Hz
- Sensitivity: 107 dB
- Resin Film Diaphragm
- 2" Kapton Voice Coil with Round Aluminum Wire
- 105mm X 12mm Ferrite Magnet
- SOLD Individually

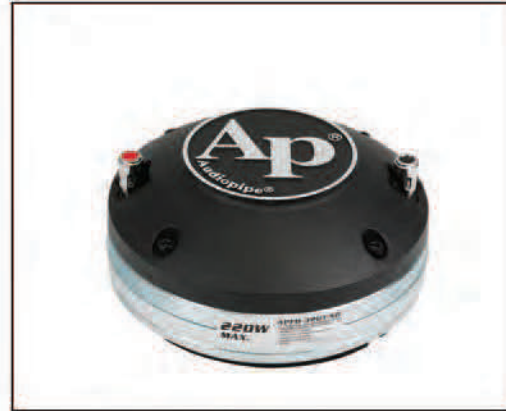

APFD-320T-ND

- 220 Watts Power (P.M.P.O.)
- 110 Watts Power (R.M.S.)
- Frequency Response: 500-18000 Hz
- Sensitivity: 108 dB
- Titanium Diaphragm
- 3" Kapton Voice Coil with Flat Wire
- Neodymium Magnet
- SOLD Individually



APFD-360T

- 220 Watts Power (P.M.P.O.)
- 110 Watts Power (R.M.S.)
- Frequency Response: 500-18000 Hz
- Sensitivity: 108 dB
- Titanium Diaphragm
- 3" Kapton Voice Coil with Flat Wire
- 170mm X 20mm Ferrite Magnet
- SOLD Individually



APCD-4085

- 1800 Watts Power (P.M.P.O.)
- 900 Watts Power (R.M.S.)
- Frequency Response: 300-7000 Hz
- Sensitivity: 110 dB
- Resin Film Diaphragm
- 4" Kapton Voice Coil with Round Aluminum Wire
- 200mm X 20mm Ferrite Magnet
- SOLD Individually



AUDIOPIPE PRO DJ

COMPRESSION DRIVERS



APCDAD-2550

- Horn Adapter
- Outer Diameter: Ø 126 mm
- Height: 20 mm
- Thread: 1 3/8"



APCDAD-775

- Horn Adapter
- Outer Diameter: Ø 150 mm
- Height: 20 mm
- Thread: 1 3/8"



APCDAD-50MD

- Replacement voice coil for APCD-50FR



APCDAD-50FR

- Replacement voice coil for APCD-50FR



APCDAD-78FR

- Replacement voice coil for APCD-78FR



APCDAD-900RC

- 3" Voice coil kits
- Replacement for: APCD-940FR / APCD-924ND / APCD-976FR



ATV-4545

- 2" Titanium Super Diaphragm
- 1.3" High temperature kapton voice coil
- One Diaphragm
- Replacement for: APH-4545-CD

AUDIOPIPE PRO DJ

POWER MIXES

AQM-16200FX

- 16 Channels professional mixer
- Mono MIC, Line input and two Stereo Inputs
- Built-in 20-BI Digital Effects, including Reverb, delay, etc, up to 99 settings with USB
- 2 AUX Output, can be used for effects and playback equipment
- Headphones and Control Room Output +RCA tape input, Output
- +48V Phantom power for condenser microphone
- Strong and reliable metal construction
- Easy to understand and control
- Suitable for Small gatherings, computer music production or small audio studio
- Selectable 115V or 230V
- Frequency Response: +0, -1dB 10Hz-150KHz
- Hi-Frequency: ± 15 dB - 12KHz
- Mid-Frequency: ± 15 dB - 2.5KHz
- Low-Frequency: ± 15 dB - 80Hz



AQM-12200FX

- Mono MIC, Line input and two Stereo Inputs
- Built-in 20-BI Digital Effects, including Reverb, delay, etc, up to 99 settings and USB
- 2 AUX Output
- Headphones and Control Room Output +RCA tape input, Output
- +48V Phantom power for condenser microphone
- Strong and reliable metal construction
- Easy to understand and control
- Suitable for Small gatherings, computer music production or small audio studio
- Selectable 115V or 230V
- Frequency Response: +0, -1dB 10Hz-150KHz
- EIN: -129dBu
- CMRR: 1 KHz, 60dB
- Crosstalk, Gain Control Input: 0 dB -+ 50dB
- Phantom power: +48 VDC
- Hi-Frequency: ± 15 dB - 12KHz
- Mid-Frequency: ± 15 dB - 2.5KHz
- Low-Frequency: ± 15 dB - 80Hz



AQM-8200FX

- 8 Channel professional mixer
- Mono MIC, Line input and two Stereo Inputs
- Built-in 20-BI Digital Effects, including Reverb, delay, etc, up to 99 settings with USB
- 2 AUX Output, can be used for effects and playback equipment
- Headphones and Control Room Output +RCA tape input, Output
- +48V Phantom power for condenser microphone
- Strong and reliable metal construction
- Easy to understand and control
- Suitable for Small gatherings, computer music production or small audio studio
- Selectable 115V or 230V
- Frequency Response: +0, -1dB 10Hz-150KHz
- EIN: -129dBu
- CMRR: 1 KHz, 60dB
- Crosstalk: 1KHz - 90dB
- Hi-Frequency: ± 15 dB - 12KHz
- Low-Frequency: ± 15 dB - 80Hz



AUDIOPIPE PRO DJ

POWER MIXES

AQDJ-2100

- Professional mixer
- 2 Mic Inputs, up to 8 Line Inputs
- 2 turntable Inputs w/individual Ground Screw
- Individual channel gain Control and cue Selector
- 3 Band eq +Frequency kill Buttons on Mic CHs
- LED Display level meter
- Blue LED illuminate fader
- Dual 10-band Graphic Equalizer
- Effects send/return Loop
- 110/220V Switchable
- Dimensions: 482x105x240mm



AQP-6100DU

- 6 Channel mixing console with two stereo channels and a separate stereo tape channel
- Separate input jack controls for mix and line input on all mono channels
- Low-noise, discrete mic preamplifiers on all microphone inputs
- Dedicated inserts on all mono channels
- Balanced 1/4" stereo jacks and balance controls on all stereo channel
- Separate stereo tape channel with 1/4" and RCA jacks
- Stereo output for recording applications
- Active 3-band EQ on all mono channels
- 2-band EQ on stereo channels
- AUX and effects paths as well as separate gain controls on all channels
- AUX Send controls in the main section for optimal level adjustment
- Headphone output with dedicated volume control
- Built-in +48V phantom power for condenser mics
- MP3 input and Playback
- 99 DSP digital multi effects (optional 16 DSP effects)
- Weight: 6.6 lbs. (3 Kg)



AQP-8100DU

- 8 Channel mixing console with two stereo channels and a separate stereo tape channel
- Separate input jack controls for mix and line input on all mono channels
- Low-noise, discrete mic preamplifiers on all microphone inputs
- Dedicated inserts on all mono channels
- Balanced 1/4" stereo jacks and balance controls on all stereo channel
- Separate stereo tape channel with 1/4" and RCA jacks
- Stereo output for recording applications
- Active 3-band EQ on all mono channels
- 2-band EQ on stereo channels
- AUX and effects paths as well as separate gain controls on all channels
- AUX Send controls in the main section for optimal level adjustment
- Headphone output with dedicated volume control
- Built-in +48V phantom power for condenser mics
- MP3 input and Playback
- 99 DSP digital multi effects (optional 16 DSP effects)
- Weight: 7.7 lbs. (3.5 Kg)



AUDIOPIPE PRO DJ

PROFESSIONAL ACTIVE LOUDSPEAKERS

DJAP-880BT

WIRELESS MUSIC STREAM

- 2-Way Configuration with active filter
- Convenient handle and wheel for portability
- Wireless Remote Control
- FM Tuner
- Line Output allows linking of additional enclosure
- 3.2" Titanium Driver
- 8" Woofer with 1.5" TIL Voice Coil
- Class D Amplifier, USB Host/SD
- 2-Way Mic Input(XLR/1/4" Jack), Line Input(XLR/RCA), 2 Band EQ(80Hz, 12kHz), Link Output XLR/1/4" Jack
- Max Power: 250W
- 3.5mm Stereo Plug to RCA plug included
- Impedance: 8 Ohms
- Frequency Range: 60Hz-20kHz

- Power Source: 115V / 230V
- Magnet: 30 Oz
- Dimensions: 256 x 270x 421mm
- Weight: 7.6Kg (16.8 lbs)



DJAP-1080BT

WIRELESS MUSIC STREAM

- 2-Way Configuration with active filter
- Convenient handle and wheel for portability
- Wireless Remote Control
- FM Tuner
- Line Output allows linking of additional enclosure
- 3.5" Titanium Driver
- 10" Woofer with 2" TIL Voice Coil
- Class D Amplifier, USB Host/SD Mp3
- 3.5mm Stereo Plug to RCA plug included
- Impedance: 8 Ohms
- Frequency Range: 50Hz-20kHz
- 2-Way Mic Input(XLR/1/4" Jack), Line Input(XLR/RCA), 2 Band EQ(80Hz, 12kHz), Link Output XLR/1/4" Jack
- Max Power: 350W
- Power Source: 115V / 230V
- Magnet: 40 Oz
- Dimensions: 300 x 345x 525mm
- Weight: 11Kg (24.3 lbs)



DJAP-1280BT

PROFESSIONAL ACTIVE LOUDSPEAKER

- 2-Way Configuration with active filter, Amplifier, a handle and wheels
- Wireless Remoter Control
- FM Tuner
- Line Output allows linking of additional enclosure
- 3.5" Titanium Driver
- 12" Woofer with 2.5" KSV Voice Coil
- Class AB Amplifier, USB Host/SD Mp3
- 3.5mm Stereo Plug to RCA plug included
- Impedance: 8 Ohms
- Frequency Range: 50Hz-20kHz
- 2-Way Mic Input(XLR/1/4" Jack), Line Input(XLR/RCA), 2 Band EQ(80Hz, 12kHz), Link Output XLR/1/4" Jack
- Max Power: 500W
- Power Source: 115V / 230V
- Magnet: 50 Oz
- Dimensions: 425 x 360x 635mm
- Weight: 19.5Kg (43 lbs)

Included:
6 FT 3.5mm to RCA Cable



Wireless Remote Control

Wireless Music Stream



Bluetooth



DJAP-1280BTAMP

- Replacement amplifier for DJAP-1280BT


AUDIOPIPE PRO DJ

PROFESSIONAL ACTIVE LOUDSPEAKERS

DJAP-B890-BWH

PROFESSIONAL ACTIVE LOUDSPEAKER

- 2-Way Configuration with active filter
- Convenient handle for portability
- Wireless Remote Control
- FM tuner
- 3.2" Titanium Driver
- Frequency Range: 60Hz-50KHz
- 8" Woofer with 1.5" TIL Voice Coil
- Magnet: 30 Oz
- Class A/B Amplifier, USB Host/SD Mp3
- 3.5mm Stereo Plug to RCA Plug Included
- 2-Way Mic Input(XLR/ 1/4" Jack), Line Input(RCA), 2 Band EQ(80Hz, 12kHz), Line Output RCA
- Max Power: 250W
- Power Source: 115V / 230V
- 12V 7.0Ah Rechargeable Battery included
- 12V direct current power supply connection
- Dimensions: 265 x 285 x 400mm
10.5" x 11.2" x 15.8"
- Weight: 11 Kg (24.3 lbs)



 **Bluetooth®**



DJAP-B890BT

PROFESSIONAL ACTIVE LOUDSPEAKER

- Wireless Music Stream
- 2-Way Configuration with active filter
- Convenient handle and wheel for portability
- Wireless Remote Control
- FM tuner
- 3.2" Titanium Driver
- 8" Woofer with 1.5" TIL Voice Coil
- Class A/B Amplifier, USB Host/ SD Mp3
- 3.5mm Stereo Plug to RCA Plug included
- Frequency Range: 60Hz-20kHz
- 2-Way Mic Input (XLR/ 1/4" Jack),
- Line Input(XLR/RCA), 2 Band EQ(80Hz, 12kHz),
- Line Output XLR/ 1/4" Jack
- Max Power: 250W
- Power Source: 115V
- 12V 7.0Ah Rechargeable Battery included
- 12V direct current power supply connection
- Magnet: 30 Oz
- Dimensions: 265x285x400mm
- Weight: 11 Kg (24.3 lbs)



 **Bluetooth®**



AUDIOPIPE PRO DJ

PROFESSIONAL SPEAKERS

DJAP-1579SLV

PROFESSIONAL PASSIVE LOUDSPEAKER

- 2-Way Configuration with active filter, a handle and wheels
- 4.5" Titanium Driver
- 15" Woofer with 3" ASV Voice Coil
- Impedance: 8 Ohms
- Frequency Range: 40Hz-20kHz
- Max Power: 700W
- Input: Speak-on
- Magnet: 70 Oz
- Dimensions: 480 x 410x 710mm
- Weight: 20Kg (44 lbs)



Included:
15 FT SPEAK-ON Cable



DJAP-1580BT

PROFESSIONAL ACTIVE LOUDSPEAKER

- Wireless Music Stream
- 2-Way Configuration with active filter, Amplifier, a handle and wheels
- Wireless Remoter Control
- FM Tuner
- Line Output allows linking of additional enclosure
- 4.5" Titanium Driver
- 15" Woofer with 3" KSV Voice Coil
- Class AB Amplifier, USB Host/SD Mp3
- 3.5mm Stereo Plug to RCA plug included
- Impedance: 8 Ohms
- Frequency Range: 40Hz-20kHz
- 2-Way Mic Input(XLR/1/4" Jack), Line Input(XLR/RCA), 2 Band EQ(80Hz, 12kHz), Link Output XLR/1/4" Jack
- Max Power: 700W
- Power Source: 115V / 230V
- Magnet: 70 Oz
- Dimensions: 480 x 410x 710mm
- Weight: 25.5Kg (56.2 lbs)

 **Bluetooth®**



Wireless
Remote
Control



**Wireless
Music Stream**



Included:
6 FT 3.5mm to RCA Cable



DJAP-1580BTAMP

- Replacment amplifier for DJAP-1580BT


AUDIOPIPE PRO DJ

PROFESSIONAL SPEAKERS

DJAP-1257AUSB

BUILT IN AMPLIFIER


- With USB and SD card reader
- 2-Way Configuration with active filter
- 3.5 Titanium Driver
- 12" Woofer with 2.5" ASV Voice Coil
- Class AB Amplifier: USB Host/SD MP3
- Impedance: 8 Ohms
- Frequency Range: 45Hz - 20kHz
- 2-Way Mic Input
- Max Power: 400 Watts
- Power Source: 115V / 230V
- Magnet: 50 Oz
- Steel basket woofer
- High wattage powered class A/B amplifier
- Stand mounting socket
- Auxiliary Line Output
- Metal Grill
- High Temperature Voice Coil
- Rubber Feet
- Easy carry handles
- Stacking grooves
- USB HOST/SD MP3
- Weight: 18 Kg (40 lbs)
- Dimension: 420 x 340 x 630 mm
16.5 x 13.4 x 24.8 inch



DJAP-1577AUSB

BUILT IN AMPLIFIER

- With USB and SD card reader
- 2-Way Configuration with active filter
- 4.5 Titanium Driver
- 15" Woofer with 3" ASV Voice Coil
- Class AB Amplifier: USB Host/SD MP3
- Impedance: 8 Ohms
- Frequency Range: 40Hz - 20kHz
- 2-Way Mic Input
- Max Power: 500 Watts
- Power Source: 115V / 230V
- Magnet: 70 Oz
- Steel basket woofer
- High wattage powered class A/B amplifier
- Stand mounting socket
- Auxiliary Line Output
- Metal Grill
- High Temperature Voice Coil
- Rubber Feet
- Easy carry handles
- Stacking grooves
- USB HOST/SD MP3
- Weight: 23.5 Kg (52 lbs)
- Dimension:
465 x 420 x 680 mm
18.3" x 16.5" x 26.8" inch



AUDIOPIPE PRO DJ

PROFESSIONAL SPEAKER BOXS

DAP-MT112

PASSIVE 2 WAY MONITOR SPEAKER ENCLOSURE

- Speaker System: Passive 2 Way Monitor Speaker Enclosure
- Frequency: 50-20KHz
- Sensitivity: 97dB/Max SPL 126dB SPL PEAK
- System Impedance: 8 Ohms
- Power Handling(watts): Max 500W
- Woofer Size: 12" Powdered Black Steel Basket
- Voice Coil: 2.5" Kapton Voice Coil
- Input Connections: Speakon or XLR 1/4" Jack
- Magnet: 50 Oz Ferrite Magnet
- Angular Coverage: 90° H x 50° V
- Dimensions: 16"(H) x 22.6"(D) x 14.4"(W)



DAP-MT115

PASSIVE 2 WAY MONITOR SPEAKER ENCLOSURE

- Speaker System: Passive 2 Way Monitor Speaker Enclosure
- Frequency: 40-20KHz
- Sensitivity: 99dB/Max SPL 128dB SPL PEAK
- System Impedance: 8 Ohms
- Power Handling(watts): Max 700W
- Woofer Size: 15" Powdered Black Steel Basket
- Voice Coil: 3" Kapton Voice Coil
- Input Connections: Speakon or XLR 1/4" Jack
- Magnet: 60 Oz Ferrite Magnet
- Angular Coverage: 90° H x 50° V
- Dimensions: 17.5"(H) x 25.8"(D) x 18.5"(W)



DAP-S118100

18" COMPACT SUBWOOFER

- Speaker System: 1 Way Passive Vented Bass Subwoofer
- Frequency: 30-1.4KHz
- Sensitivity: 99dB/Max SPL 132dB SPL PEAK
- System Impedance: 8 Ohms
- Power Handling(watts): Max 1000W
- Woofer Size: 18" Aluminum Basket
- Voice Coil: 4" Basv
- Input Connections: Speakon or XLR 1/4" Jack
- Magnet: 100 Oz Ferrite Magnet
- Dimensions: 29"(H) x 21.5"(D) x 23.8"(W)



AUDIOPIPE PRO DJ

PROFESSIONAL SPEAKERS

DJAP-1593BT

WIRELESS MUSIC STREAM

- 2-Way Configuration with active filter, Amplifier, a handle and wheels
- Line output allows linking of additional enclosure
- 4.5" Titanium Driver
- Frequency Range: 40Hz-20KHz
- 15" Woofer with 3" KSV Voice Coil
- Magnet: 93 Oz
- Impedance: 8 ohm
- Class A/B Amplifier, USB Host/SD Mp3
- 2-Way Mic Input(XLR/ 1/4" Jack), Line Input(XLR/RCA), 2 Band EQ(80Hz, 12kHz), Line Output XLR / 1/4" Jack
- Max Power: 1000W
- Power Source: 115V / 230V
- Dimensions: 465 x 430 x 700mm
18.3" x 16.9" x 27.6"
- Weight: 22.5 Kg (49.6 lbs)



DJAP-18601USB

PROFESSIONAL ACTIVE LOUDSPEAKER

- Sub-woofer with active filter 18" Subwoofer
- Subwoofer Freq Resp: 30Hz - 180Hz \pm 3dB
- Satellite Freq Resp: 180Hz - 20KHz \pm 3dB
- Line Input: XLR / RCA
- Line Output: XLR / RCA
- Max Power: 500W
- Power Voltage: AC115V & AC230V
- Dimensions: 27.2"x 21.9"x 24.2"
- Net Weight: 37.5Kg (83lbs)



PRO AUDIO

CABLES



FBC-3 (3')
FBC-6 (6')
FBC-10 (12')
FBC-18 (18')

INSTRUMENT CABLE

- 1/4" to 1/4" Mono
- Black



FCC-10BLS
FCC-18BLS

1/4" TO 1/4" INSTRUMENT CABLE

- Tweed/ 7.4mm
- 10'/ 18"
- Shrink tubing gold tip plug
- Black & silver cotton woven exterior cover



FS-620 (20')
FS-650 (50')

SPEAKER CABLE

- 1/4" to 1/4"
- Clear



FSB-650 (50')

SPEAKER CABLE

- 1/4" to dual banana plug
- Clear



FX-714P-F60 (20')
FX-714P-F60 30F (20')

MICROPHONE CABLE

- 3 pin female XLR to 1/4"
- Black

FX-714P-P35 (6')

MICROPHONE CABLE

- 1/4" plug to 3.5mm
- Black



FX-720 (20')
FX-750 (50')

INSTRUMENT CABLE

- 1/4" to 1/4"
- Black

PRO AUDIO

CABLES



FX-7M60-14-6 (6')
 FX-7M60-14-20 (20')
 FX-7M60-14-30 (30')
 FX-7M60-14-50 (50')
 1/4" TO XLR FEMALE PREMIUM INSTRUMENT CABLE
 • Black



FXB-3514-6 (6')
 FXB-3514-12 (12')
 INSTRUMENT CABLE
 • 3.5mm plug to 1/4" plug
 • Ø 6.3mm
 • Black

FX-7M60-F60-3 (3')
 FX-7M60-F60-6 (6')
 FX-7M60-F60-20 (20')
 FX-7M60-F60-50 (50')
 FX-7M60-F60-75 (75')
 MICROPHONE CABLE
 • 3 Pin male XLR to 3 Pin female XLR
 • Black




ZPC-Y35S14DMN-6
 6' PRO AUDIO CABLE
 • "Y" cable 3.5mm stereo
 to 2-1/4" mono



FXB-3514M-12 (12')
 FXB-3514M-18 (18')
 ACCESSORY CABLES
 • 3.5MM PLUG TO 1/4" Mono Plug
 • Black



FXB-720 (20')
 FXB-750 (50')
 SPEAKER CABLE
 • 1/4" to dual banana plug
 • Black

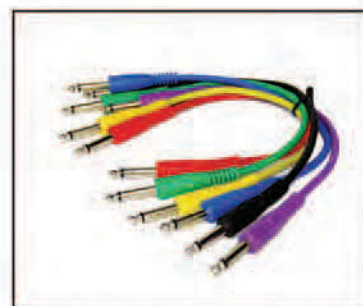

FXC-61414
 JUMPER CABLES FOR
 GUITA PEDALS
 • 6 Color Coded: red, blue,
 yellow, green, black & purple

PRO AUDIO

CABLES



MC-3 50 Ft.
MC-3 100 Ft.
MICROPHONE CABLE

- Black color
- Stereo



MC-10
MICROPHONE CABLE

- 20'
- 1/4" Plug to 3 Pin XLR Jack



MC-1 MONO
MC-1 STR
MICROPHONE CABLE

- 500'
- 20 Gauge

MC-5-500WW
MICROPHONE CABLE

- 500'
- 20 Gauge
- Stereo



PRO AUDIO-INSTRUMENT CABLE

- 1/4" to 1/4" heavy-duty 20 gauge pro audio cable
- Single plug works great for many instrument connections
- low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection


MC-14-3 (3')

MC-14-6 (6')

MC-14-12 (12')

MC-14-20 (20')

MC-14-30 (30')

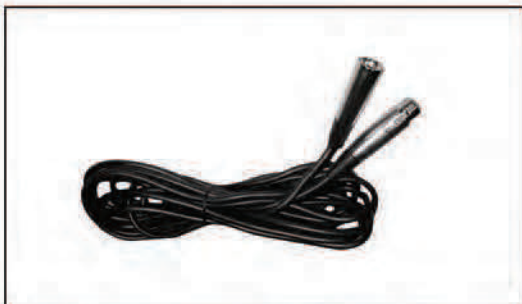

MC-20-3 (3')

MC-20-6 (6')

MC-20-12 (12')

MC-20-20 (20')

MC-20-30 (30')

MC-20-50 (50')

MICROPHONE CABLE

- 3 Pin XLR Plug to 3 Pin XLR Jack



MC-30-6 (6')

MC-30-12 (12')

MC-30-20 (20')

MC-30-30 (30')

MICROPHONE CABLE

- 1/4" Mono Plug to 3 Pin XLR Plug

PRO AUDIO

CABLES



N-110E

RED INSTRUMENT CABLE

- 10'
- 1/4" Plug to 1/4" Plug with gold Tips



N-120E

RED INSTRUMENT CABLE

- 20'
- 1/4" Plug to 1/4" Plug with gold Tips



N-130E

BLUE INSTRUMENT CABLE

- 10'
- 1/4" Plug to 3 Pin Female XLR with gold Tip



N-140E

BLUE INSTRUMENT CABLE

- 20'
- 1/4" Plug to 3 Pin Female XLR with gold Tip



N-112CL (10')

N-122CL (20')

PROFESSIONAL WOVEN INSTRUMENT CABLE

- 1/4" to 1/4" with Gold Tips
- High Heat Protection



N-122-MF60

WOVEN MICROPHONE CABLE

- 20'
- 3 Pin Female XLR to 3 Pin Male XLR

PRO AUDIO

CABLES



N-150 (10')
• Instrument cable
• 1/4" to 1/4" angled



N-170E (10')
N-180E (20')
• Microphone cable
• 3 Pin Male to 3 Pin Female



N-200
• Instrument cable
• 1/4" to 1/4"
• Shielded
• 20'



N-201S (stereo)
• Accessory cable
• Headphone Extension
• 1/4"
• 20'



N-234-12 (12')
N-234-18 (18')
• Instrument cable
• 1/4" to 1/4"
• Black



N-251 (10')
N-252 (20')
• Instrument cable
• 1/4" to 1/4"
• Gold Tips

PRO AUDIO

CONNECTORS



X-1067

TERMINAL

- 3 Pins
- XLR Female
- Plastic



X-1068

TERMINAL

- 3 Pins
- XLR Male
- Plastic



X-1091

TERMINAL

- 8 Pins
- SPK Female
- Plastic



X-1092

TERMINAL

- 4 Pins
- SPK Female
- Plastic



X-1097

TERMINAL

- 4 Pins
- SPK Female
- Plastic



X-1098

TERMINAL

- 4 Pins
- SPK Female
- Plastic

PRO AUDIO

CONNECTORS



X-1001

- XLR Female with nickel finish
- 3 pins



X-1002

- XLR Male with nickel finish
- 3 Pins



X-1088

- SPKN type male plug
- 4 pins
- Economy type



X-1090

- SPKN male
- 4 Pins



X-1090L

- SPKN plug
- 4 Pins
- Right angle



X-1093

- SPKN female cable connector
- 8 Pins



X-1103

- SPKN male
- 8 Pins



X-1135

- SPKN female to 1/4" female
- 2 Pins



X-1136

- 1/4" female to SPKN male



X-1142

- SPKN plug coupler

PRO AUDIO

CONNECTORS



MX-71BLACK
CONNECTOR 3-PINS XLR MALE
• Black color



MX-73BLACK
CONNECTOR 3 PINS MALE XLR
• Hexagon cap
• Color black



MX-73BLUE
CONNECTOR 3 PINS MALE XLR
• Hexagon cap
• Color blue



MX-73RED
CONNECTOR 3-PIN MALE XLR
• Hexagon cap
• Color red



MX-75
CONNECTOR 3-PIN MALE XLR
• Metal cap
• Ring color available in:
blue, green, white, yellow and red



P-193
CONNECTOR 1/4" FEMALE STEREO
• Metal finish



P-194
CONNECTOR 1/4" FEMALE TO 1/4" MALE
• Mono / Mono



P-195
CONNECTOR 1/4" FEMALE
STEREO TERMINAL
• Metal finish

PRO AUDIO

CONNECTORS



F-60

- XLR female



F-67

- XLR female to 1/4" mono plug

FX-61BK

- XLR female
- Metal cap
- Black

FX-61

- XLR female
- Metal cap
- Includes rings: black, blue, green, red, yellow, and white



FX-63

- XLR female
- Metal cap



FX-71BLACK

- XLR female



FX-73BLACK

- 3 Pins female XLR
- Exagon cap
- Color: Black



FX-73BLUE

- 3 Pins female
- Exagon cap
- Color: Blue



FX-73RED

- 3 Pins female
- Exagon cap
- Color: Red

FX-75BK

- 3 Pins female
- Metal cap
- Black

FX-75BL

- 3 Pins female
- Metal cap
- Blue

FX-75

- 3 Pins female
- Metal cap
- Includes rings: black, blue, green, red, yellow and white



PRO AUDIO

CONNECTORS



M-60

- XLR
- Male



M-67

- 3 pins male to 1/4" plug



M-68

- 3 pins
- Male XLR to male XLR



M-70

- 3 pins
- Male XLR terminal



M-77

- XLR male to 1/4" female

M-78

- 3 Pins
- Female XLR to female XLR



M-80

- Microphone connector 3Pin/male
- XLR / 1/4" dual purpose socket



MX-61

- 3 Pins male XLR
- Metal cap
- Includes rings: blue, black, green, yellow, red and white



MX-61BK

- 3 Pins male XLR
- Metal cap
- Black



MX-63

- 3 Pins male XLR
- Metal cap



PRO AUDIO

CONNECTORS



X-1132

- 1/4" Mono Male
- Nickel Finish
- Gold Tip
- Connects Cable which is between \varnothing 6-7mm
- Includes 3 additional color code bands



X-1132BK

- 1/4"
- Mono Male
- Nickel Finish
- Gold Tip
- Connects Cable which is between \varnothing 6-7mm
- Black color



X-1132BL

- 1/4"
- Mono Male
- Nickel Finish
- Gold Tip
- Connects Cable which is between \varnothing 6-7mm
- Blue color



X-1132GR

- 1/4"
- Mono Male
- Nickel Finish
- Gold Tip
- Connects Cable which is between \varnothing 6-7mm
- Green color



X-1132RD

- 1/4"
- Mono Male
- Nickel Finish
- Gold Tip
- Connects Cable which is between \varnothing 6-7mm
- Red color



X-1132YL

- 1/4"
- Mono Male
- Nickel Finish
- Gold Tip
- Connects Cable which is between \varnothing 6-7mm
- Yellow color



P-181 BLACK

P-181 BLUE

P-181 RED

PROFESSIONAL PLUG 1/4" COLOR CODED

- Stereo
- Available in black, blue and red

P-180 BLUE

P-180 RED

PROFESSIONAL PLUG 1/4"

- Mono
- Available in black and red



PRO AUDIO

CONNECTORS



X-1133

- 1/4"
- Stereo male
- Nickel finish
- Gold tip
- Connects Cable which is between Ø 6~7mm



X-1141

- 1/4" Plug coupler
- Nickel finish



X-1143

- 1/4" Plug coupler stereo
- Nickel finish



X-571

- 1/4"
- Mono Silver Tip
- Nickel Finish
- Bakelite


X-571G

- 1/4"
- Mono Gold Tip
- Nickel finish
- Bakelite



X-591G

- 1/4"
- Mono gold tip
- Nickel Finish

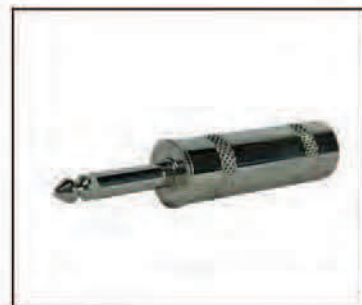

X-601

- 1/4"
- Mono Male
- Nickel Finish
- Heavy Duty
- Bakelite



X-602

- 1/4"
- Stereo male
- Nickel finish
- Heavy duty
- Gold tip



X-631GB

- 1/4"
- Mono gold tip
- Bakelite

PRO AUDIO

CONNECTORS



ZA-XLRF-RCAF

- 3-pin XLR female to RCA female jack
- Connects an unbalanced RCA female head to a balanced XLR female



ZA-XLRM-RCAF

- 3-pin XLR male to RCA female jack
- Connects an unbalanced RCA female head to a balanced XLR female



ZA-XLRF-RCAM

- 3-pin XLR female to RCA male jack
- Connects an unbalanced RCA male head to a balanced XLR female



ZA-XLRF-XLRF

- XLR female to XLR female coupler
- In-line balanced 3pin XLR adapter joins two XLR male connectors



ZA-XLRM-RCAM

- 3-pin XLR male to RCA male jack
- Connects an unbalanced RCA male head to a balanced XLR male



ZA-XLRM-XLRM

- XLR male to XLR male coupler
- In-line balanced 3pin XLR adapter joins two XLR female connectors



ZP-14MN

ZP-14MN-PG (Gold plated)

ZP-14MN-RA (Right angle)

- 1/4"
- Mono Gold Tip



ZP-35MM-P

- 3.5mm Mono Plug



ZP-35ST-P

- 3.5mm Stereo Plug

DJ-112FM

12" WOOFER

- 5" x 12" horn tweeter
- Power handling: 150W RMS/ 300W max
- Impedance: 8 ohms
- Magnet: 30 oz.
- 1.5" aluminum voice coil
- Dimensions: 430 x 335 x 365 x 660 mm



DJ-115FM

15" WOOFER

- 6" x 17" horn tweeter
- Power handling: 200W RMS/ 400W max
- Impedance: 8 ohms
- Magnet: 50 oz.
- 2" Al voice coil
- Dimensions: 530 x 395 x 395 x 755 mm



DJ-118SFM

18" SUBWOOFER CABINET

- Power handling: 300W RMS/ 500W max
- Impedance: 8 ohms
- Magnet: 70 oz.
- 3" Al voice coil
- Dimensions: 620 x 365 x 525 x 735 mm



ZEBRA

PROFESSIONAL EQUIPMENT

Z-20C

TWEETER BOX

- Two 4" piezo tweeters
- Dimensions: 290 x 225 x 1160mm (11.4" x 8.8" x 6.3")
- Frequency response: 4K-27KHz
- Max. power: 100W



Z-40C

TWEETER BOX

- 4 way tweeter system
- Carpeted heavy duty construction
- Power handling: 100W RMS/200W peak
- Dual 1/4" phono jacks
- Frequency response: 3.5K-20KHz
- SPL: 97dB (1W/1M)



Z-70

TWEETER BOX

- 7-way DJ tweeter system
- Six 3.5" piezo tweeters
- 5" x 12" horn
- Gold post terminals
- Carpet finish
- Frequency response: 6K-29KHz
- Sensitivity: 95dB (1W/ 1M)
- Size: 13" x 22" x 12 1/2"
- Max power: 200W



Z-90

TWEETER BOX

- 6-way DJ tweeter system
- Five 3.5" piezo tweeters
- 10" x 18" horn tweeter
- Gold post terminals
- Carpet finish
- Chrome plated metal corners
- Frequency response: 9K-31KHz
- Sensitivity: 92dB (1W/ 1M)
- Size: 16 3/4" x 23 3/8" x 18 1/4"
- Max. power: 400W



ZEBRA

MINI MIXERS

ZMX-100

MINI MIXER

- 4 Mic Inputs
- 1 Line Output
- 20dB Gain
- Power Supply: DC 12V / AC 100-240V



ZMX-200

MINI MIXER

- 8 Mic Inputs
- 2 Line Output
- 20dB Gain
- Power Supply: DC 12V / AC 100-240V



ZMX-400 EFX

MINI MIXER

- 4 Mono 1/4" Microphone Inputs with individual volume control
- Built-in Echo Effects DSP with Delay Time and Depth Control
- Simulates from room, hall, stadium and delays reverb
- 1/4" Unbalanced Output
- Up to 50dB of Gain per Channel
- Power ON/OFF switch with LED indicator, 9V DC Powered with PAD
- 1 AC/DC External Adapter



STUDIO Z

PRO AUDIO CABLES



FXB-3514-6 (6'/1.83m)
FXB-3514-12 (12'/3.66m)
3.5MM PLUG TO 1/4" PLUG
• Ø6.3mm



X-211-15 (15'/4.57m) **X-211-50** (50'/15.24m)
X-211-25 (25'/7.62m) **X-211-75** (75'/22.86m)
2 WIRE SPKN to Banana
• 14 Gauge



X-214-15 (15'/4.57m) **X-214-50** (50'/15.24m)
X-214-25 (25'/7.62m) **X-214-75** (75'/22.86m)
2 WIRE SPKN to 1/4" 2 WIRE SPKN to 1/4"
• 14 Gauge • 14 Gauge



X-352-15 (15'/4.57m) **X-352-50** (50'/15.24m)
X-352-25 (25'/7.62m) **X-352-75** (75'/22.86m)
2 WIRE SPKN MALE TO SPKN MALE
• 14 Gauge

X-371-1.5 (4.92'/1.5m)
4 WIRE SPKN MALE TO SPKN MALE
• 14 gauge



X-371-5 (16.40'/5m)
4 WIRE SPKN MALE TO SPKN MALE
• 12 gauge



X-371-15 (49.21'/15m)
4 WIRE SPKN MALE TO SPKN MALE
• 12 gauge



STUDIO Z

PRO AUDIO CABLES

XSPK-14-100 (100' / 30.48m)
2 Wire SPKN to SPKN Cables
• 16 Gauge

XSPK-14-2-300 (300' / 91.44m)
2 Wire SPKN to SPKN Cables
• 14 Gauge

XSPK-16-2-300 (300' / 91.44m)
2 Wire SPKN to SPKN Cables
• 16 Gauge



XSPK-210-250
4 WIRE SPKN CABLE
• 250' / 76.2m
• 10 Gauge
• OD: Ø14mm



XSPK-212-250
4 WIRE SPKN CABLE
• 250' / 76.2m
• 12 Gauge
• OD: Ø12mm



XSPK-214-250
4 WIRE SPKN CABLE
• 250' / 76.2m
• 14 Gauge
• OD: Ø10mm

MC-10WH
WHITE MICROPHONE CABLE
• ¼" mono plug to 3pin XLR
• Heavy duty construction
• High Grade flexible PVC
• White color
• 10'
• Ideal for church or place of worship



MC-20WH
WHITE MICROPHONE CABLE
• 3 pin XLR plug to 3 pin XLR jack
• Heavy duty construction
• High Grade flexible PVC
• White color
• 20'
• Ideal for church or place of worship



ZCI-14S214M-6
SIGNAL CABLE
• ¼" stereo to ¼" mono left
• ¼" mono right
• 6'



STUDIO Z

PRO AUDIO CABLES



ZICM-241414M-10

10Ft 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZICM-241414M-20

20Ft 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZICM-241414M-30

30Ft 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZICM-201414M-10

10Ft 1/4" TO 1/4" HEAVY-DUTY

- 20 gauge pro audio cable
- Single plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZICM-201414M-20

20Ft 1/4" TO 1/4" HEAVY-DUTY

- 20 gauge pro audio cable
- Single plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZICM-201414MR-10

10Ft 1/4" TO 1/4" RIGHT ANGLE

- 20 gauge pro audio cable
- Single right angle plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



STUDIO Z

PRO AUDIO CABLES



ZICM-201414MR-20

20Ft 1/4" TO 1/4" RIGHT ANGLE HEAVY DUTY

- 20 gauge pro audio cable
- Single right angle plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable



ZICM-241414MR-10

10Ft 1/4" TO 1/4" RIGHT ANGLE HEAVY-DUTY

- 20 gauge pro audio cable
- Single right angle plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable



ZICM-241414MR-20

20Ft 1/4" TO 1/4" RIGHT ANGLE HEAVY-DUTY

- 20 gauge pro audio cable
- Single right angle plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable



ZICM-241414MR-30

30Ft 1/4" TO 1/4" RIGHT ANGLE HEAVY-DUTY

- 20 gauge pro audio cable
- Single right angle plug works great for many instrument connections
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable



STUDIO Z

PRO AUDIO CABLES



ZICW-201414-10B

10Ft BLACK WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 20 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-201414-20B

20Ft BLACK WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 20 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-201414-30B

30Ft BLACK WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 20 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-10B

10Ft BLACK WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-20B

20Ft BLACK WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-30B

30Ft BLACK WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



STUDIO Z

PRO AUDIO CABLES



ZICW-241414-10G

10Ft GREEN WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-20G

20Ft GREEN WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 20 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-30G

30Ft GREEN WOVEN 1/4" TO 1/4" HEAVY-DUTY


- 20 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-10O

10Ft ORANGE WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection

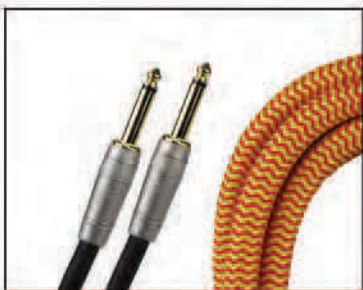

ZICW-241414-20O

20Ft ORANGE WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZICW-241414-30O

30Ft ORANGE WOVEN 1/4" TO 1/4" HEAVY-DUTY

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it, or things rolling over it
- Low resistance and maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



STUDIO Z

PRO AUDIO CABLES



ZMC-24MXF-6BP

6Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge classic microphone cable
- Black polish connector finish
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Ultra-pure oxygen-free
- Durable yet flexible, black PVC outer jacket



ZMC-24MXF-10BP

10Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge classic microphone cable
- Black polish connector finish
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Ultra-pure oxygen-free
- Durable yet flexible, black PVC outer jacket



ZMC-24MXF-25BP

25Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge classic microphone cable
- Black polish connector finish
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Ultra-pure oxygen-free
- Durable yet flexible, black PVC outer jacket



ZMC-24MXF-50BP

50Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge classic microphone cable
- Black polish connector finish
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Ultra-pure oxygen-free
- Durable yet flexible, black PVC outer jacket



ZMC-24MXF-6NP

6Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge microphone Cable with nickel connector
- Satin nickel polish connector finish
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Ultra-pure oxygen-free
- Durable yet flexible, black PVC outer jacket



ZMC-24MXF-10NP

10Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge microphone Cable with nickel connector
- Satin nickel polish connector finish
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Ultra-pure oxygen-free
- Durable yet flexible, black PVC outer jacket



STUDIO Z

PRO AUDIO CABLES



ZMC-24MXF-25NP

- 25Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE
- 24 gauge microphone Cable with nickel connector
 - Satin nickel polish connector finish
 - Extremely low capacitance for pure signal transparency
 - Molded strain relief for ultimate durability
 - Ultra-pure oxygen-free
 - Durable yet flexible, black PVC outer jacket



ZMC-24MXF-50NP

- 50Ft 3 PIN XLR MALE TO 3 PIN XLR FEMALE
- 24 gauge microphone Cable w/nickel connector
 - Satin nickel polish connector finish
 - Extremely low capacitance for pure signal transparency
 - Molded strain relief for ultimate durability
 - Ultra-pure oxygen-free
 - Durable yet flexible, black PVC outer jacket



ZMCW-24MXF-6B

- 6FT BLACK WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE
- 24 gauge pro audio cable
 - Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
 - Molded strain relief for ultimate durability
 - Extremely low capacitance for pure signal transparency



ZMCW-24MXF-6G

- 6FT GREEN WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE
- 24 gauge pro audio cable
 - Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
 - Molded strain relief for ultimate durability
 - Extremely low capacitance for pure signal transparency



ZMCW-24MXF-6O

- 6FT ORANGE WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE
- 24 gauge pro audio cable
 - Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
 - Molded strain relief for ultimate durability
 - Extremely low capacitance for pure signal transparency



ZMCW-24MXF-10B

- 10FT BLACK WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE
- 24 gauge pro audio cable
 - Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
 - Molded strain relief for ultimate durability
 - Extremely low capacitance for pure signal transparency



STUDIO Z

PRO AUDIO CABLES



ZMCW-24XMXF-10G

10Ft GREEN WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
- Molded strain relief for ultimate durability
- Extremely low capacitance for pure signal transparency



ZMCW-24XMXF-100

10Ft ORANGE WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
- Molded strain relief for ultimate durability
- Extremely low capacitance for pure signal transparency



ZMCW-24XMXF-25B

25Ft BLACK WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
- Molded strain relief for ultimate durability
- Extremely low capacitance for pure signal transparency



ZMCW-24XMXF-25G

25Ft GREEN WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
- Molded strain relief for ultimate durability
- Extremely low capacitance for pure signal transparency



ZMCW-24XMXF-25O

25Ft ORANGE WOVEN 3PIN XLR MALE TO 3 PIN XLR FEMALE

- 24 gauge pro audio cable
- Sport nylon braiding protects the cable against cuts and breaks caused by kinking, things falling on it or things rolling over it
- Molded strain relief for ultimate durability
- Extremely low capacitance for pure signal transparency



STUDIO Z

PRO AUDIO CABLES

ZMT-8XMXF-16BP

MULTI-TRACK 8 CHANNELS SNAKE

- 16ft 8 channel snake 3 pin male XLR to 3 pin XLR female
- 24 gauge pro audio cable
- Snake cables provide connectivity for studios, stage rigs, and PA systems
- Channel identification markings
- Eliminate messy, expensive patch cables
- Durable yet flexible, black PVC outer jacket



ZMT-8XMXF-33BP

MULTI-TRACK 8 CHANNELS SNAKE

- 33ft 8 channel snake 3 pin male XLR to 3 pin XLR female
- 24 gauge pro audio cable
- Snake cables provide connectivity for studios, stage rigs, and PA systems
- Channel identification markings
- Eliminate messy, expensive patch cables
- Durable yet flexible, black PVC outer jacket



ZPC-24D14D14-3

DUAL HEAD PRO AUDIO CABLE

- 3ft dual 1/4" to dual 1/4" heavy-duty
- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZPC-24D14D14-6

DUAL HEAD PRO AUDIO CABLE

- 6ft dual 1/4" to dual 1/4" heavy-duty
- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZPC-24D14SD14S3

DUAL HEAD PRO AUDIO CABLE

- 3ft dual 1/4" TRS Stereo to dual 1/4" TRS Stereo heavy-duty
- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



ZPC-24D14SD14S6

DUAL HEAD PRO AUDIO CABLE

- 6ft dual 1/4" TRS Stereo to dual 1/4" TRS Stereo heavy-duty
- 24 gauge pro audio cable
- Low resistance and maximum signal transfer
- Durable yet flexible, black PVC outer jacket
- Heavy-duty metal shell connectors for a reliable connection



STUDIO Z

PRO AUDIO CABLES



ZPC-24RCAD14-6

6Ft MALE DUAL RCA PLUG TO DUAL 1/4" MALE PLUG

- 24 gauge pro audio cable
- Heavy duty metal shell connectors for reliable connection
- Gold plated RCA head for superior sound transfer
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24RCAD14-10

10Ft MALE DUAL RCA PLUG TO DUAL 1/4" MALE PLUG

- 24 gauge pro audio cable
- Heavy duty metal shell connectors for reliable connection
- Gold plated RCA head for superior sound transfer
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XMRCA-6

3Ft 3PIN XLR FEMALE TO 1/4" MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XF14M-3

3Ft 3PIN XLR FEMALE TO 1/4" MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XF14M-6

6Ft 3PIN XLR FEMALE TO 1/4" MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XF14M-10

10Ft 3PIN XLR FEMALE TO 1/4" MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



STUDIO Z

PRO AUDIO CABLES



ZPC-24XM14S-3

3Ft 3PIN XLR MALE TO 1/4" TRS STEREO MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XM14S-6

6Ft 3PIN XLR MALE TO 1/4" TRS STEREO MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XM14S-10

10Ft 3PIN XLR MALE TO 1/4" TRS STEREO MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-24XM14S-25

25Ft 3PIN XLR MALE TO 1/4" TRS STEREO MALE PLUG

- 24 gauge pro audio cable
- Microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-Y14S14DMN-3

3Ft Y-ADAPTER 1/4" TRS STEREO MALE TO DUAL 1/4" MALE

- 24 gauge pro audio cable
- Allows you to connect one 1/4" TRS male to two 1/4" male outputs
- Low resistance for maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZPC-Y14S14DS-3

3Ft Y-ADAPTER 1/4" TRS STEREO MALE TO DUAL 1/4" TRS STEREO MALE

- 24 gauge pro audio cable
- Allows you to connect one 1/4" TRS male to two 1/4" TRS male outputs
- Low resistance for maximum signal transfer
- Heavy-duty metal shell connectors for a reliable connection



ZP-XLRFXLRF-1.5

1.5ft 3PIN XLR FEMALE TO XLR FEMALE CABLE WITH NICKEL CONNECTOR

- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZP-YXLRF14D

6" Y-ADAPTER 3PIN XLR FEMALE TO DUAL 1/4" TRS STEREO MALE PLUG

- Low resistance for maximum signal transfer
- Allows you to connect one XLR female audio input to two XLR male outputs
- Molded strain relief for ultimate durability
- Gold plated plug for superior sound transfer



ZP-YXLRM14D

6" Y-ADAPTER 3PIN XLR MALE TO DUAL 1/4" TRS STEREO MALE PLUG

- Low resistance for maximum signal transfer
- Allows you to connect one XLR female audio input to two XLR male outputs
- Molded strain relief for ultimate durability
- Gold plated plug for superior sound transfer



ZP-YXLRFXLRMD-1

1ft Y-ADAPTER 3PIN XLR FEMALE TO DUAL 3 PIN XLR MALE

- Allows you to connect one XLR female audio input to two XLR male outputs
- Molded strain relief for ultimate durability
- Heavy-duty metal shell connectors for a reliable connection



ZP-YXLRFXLRMD-3

3ft Y-ADAPTER 3PIN XLR FEMALE TO DUAL 3 PIN XLR MALE

- Allows you to connect one XLR female audio input to two XLR male outputs
- Molded strain relief for ultimate durability
- Heavy-duty metal shell connectors for a reliable connection



ZP-YXLRMXLRFD-1

1ft Y-ADAPTER 3PIN XLR MALE TO DUAL 3 PIN XLR FEMALE PRO AUDIO CABLE

- Allows you to split one XLR male to two XLR females
- Molded strain relief for ultimate durability
- Heavy-duty metal shell connectors for a reliable connection



ZP-YXLRMXLRFD-3

3ft Y-ADAPTER 3PIN XLR MALE TO DUAL 3 PIN XLR FEMALE PRO AUDIO CABLE

- Allows you to split one XLR male to two XLR females
- Molded strain relief for ultimate durability
- Heavy-duty metal shell connectors for a reliable connection



STUDIO Z

PRO AUDIO CABLES



ZPC-24XF14M-25

25Ft 3PIN XLR FEMALE TO 1/4" MALE PLUG

- 24 gauge microphone cable with nickel connector
- Extremely low capacitance for pure signal transparency
- Molded strain relief for ultimate durability
- Durable yet flexible, black PVC outer jacket



ZPC-DXM35-10

DUAL XLR MALE TO 3.5 MALE STEREO

- 10Ft pro audio cable
- Durable yet flexible, black PVC outer jacket
- Oxygen free cable



ZPC-XM35-10

XLR MALE TO 3.5 STEREO RIGHT ANGLE PLUG

- 10Ft Microphone cable
- Durable yet flexible, black PVC outer jacket



ZPC-Y35S14DMN-6

"Y" CABLE 3.5MM STEREO TO DUAL 1/4" MONO

- 6Ft Pro Audio Cable
- Durable yet flexible, black PVC outer jacket



STUDIO Z

PROFESSIONAL ABS LOUDSPEAKERS

DZL-B1245MBT

PROFESSIONAL ABS LOUDSPEAKER

- 2-Way amplified Plastic activate Loudspeaker
- Woofer: 12"
- Voice Coil: 2"
- Magnet: 45 Oz
- Tweeter: 1" Titanium Driver, 9 Oz
- Max Power: 350 Watts
- Voltage: 110/220V, 50/60Hz
- Impedance: 4Ω
- Sensitivity: 94 ± 2dB
- Frequency Response: 50 Hz- 18KHz
- LCD Screen + USB/ SD Player + FM Radio + Echo + Wireless Music Stream + Remote Control + 2- wireless Microphones
- ABS resistant nylon fiber Cabinet
- Mic input with XLR & 1/4" Connector and separate Level Control\
- One line input and output of stereo RCA Connector
- With 12V, 7A Battery and external 12V DC Power
- Wheels and Handle for easy Transportation
- Built-in battery 12V-7 Amp



Two wireless microphones included

DZL-B1545MBT

PROFESSIONAL ABS LOUDSPEAKER

- 2-Way amplified Plastic activate Loudspeaker
- Woofer: 15"
- Voice Coil: 2"
- Magnet: 45 Oz
- Tweeter: 1.3" Titanium Driver, 13 Oz
- Max Power: 600 Watts
- Voltage: 110/220V, 50/60Hz
- Impedance: 4Ω
- Sensitivity: 96 ± 2dB
- Frequency Response: 50 Hz- 18KHz
- LCD Screen + USB/ SD Player + FM Radio + Echo + Wireless Music Stream + Remote Control + 2- wireless Microphones
- ABS resistant nylon fiber Cabinet
- Mic input with XLR & 1/4" Connector and separate Level Control\
- One line input and output of stereo RCA Connector
- With 12V, 7A Battery and external 12V DC Power
- Wheels and Handle for easy Transportation
- Built-in battery 12V-7 Amp



Two wireless microphones included

STUDIO Z

PROFESSIONAL ABS LOUDSPEAKERS

DZC-1540UB

PROFESSIONAL ABS LOUDSPEAKER

- Woofer: 15"
- Voice Coil: 2"
- Magnet: 40 Oz
- Tweeter: 1" Titanium Diaphragm Driver
- Max Power: 350 Watts
- Voltage: 110/220V
- Impedance: 8Ω
- Sensitivity: 98 dB
- Frequency Response: 20 Hz- 20KHz
- LCD Screen + USB/ SD Player + Wireless Music Stream + FM Radio + Remote Control
- Speaker Output for a passive Enclosure
- Aux In for multimedia Devices
- Blue LED Power Indicator
- Wheels and Handle for easy Transportation



DZCMB-1547LUB

PROFESSIONAL ABS LOUDSPEAKER

- Woofer: 15"
- Voice Coil: 2"
- Magnet: 40 Oz
- Tweeter: 1" Titanium Diaphragm Driver
- Max Power: 2000 Watts
- Voltage: 110/220V
- Impedance: 4Ω
- Sensitivity: 96dB
- Frequency Response: 45Hz~20KHz
- LCD Screen+ USB/SD Player + Wireless Music Stream + FM Radio + 48 LEDs (R16, G16, B16)
- Aux In for multimedia Devices
- Wheels and Handle for easy Transportation

INCLUDED:

- 1 Microphone
- 1 Remote Control
- 1 Speaker Stand



STUDIO Z

PROFESSIONAL ABS LOUDSPEAKERS

DZB-830UB

PROFESSIONAL ABS LOUDSPEAKER

- Woofer: 8"
- Voice Coil: 1.5"
- Magnet: 30 Oz
- Tweeter: 1" Titanium Diaphragm Driver
- Max Power: 300 Watts
- Voltage: 110/220V
- Impedance: 8Ω
- Sensitivity: 94 dB
- Frequency Response: 65 Hz- 20KHz
- LCD Screen + USB/ SD Player + Wireless Music Stream + FM Radio + Remote Control
- Speaker Output for a passive Enclosure
- Aux In for multimedia Devices
- Blue LED Power Indicator
- Wheels and Handle for easy Transportation



DZB-1030UB

PROFESSIONAL ABS LOUDSPEAKER

- Woofer: 10"
- Voice Coil: 1.5"
- Magnet: 30 Oz
- Tweeter: 1" Titanium Diaphragm Driver
- Max Power: 350 Watts
- Voltage: 110/220V
- Impedance: 8Ω
- Sensitivity: 94 dB
- Frequency Response: 65 Hz- 20KHz
- LCD Screen + USB/ SD Player + Wireless Music Stream + FM Radio + Remote Control
- Speaker Output for a passive Enclosure
- Aux In for multimedia Devices
- Blue LED Power Indicator
- Wheels and Handle for easy Transportation



STUDIO Z

PROFESSIONAL ABS LOUDSPEAKERS

DZB-1250UB

PROFESSIONAL ABS LOUDSPEAKER

- Woofer: 12"
- Voice Coil: 2.5"
- Magnet: 50 Oz
- Tweeter: 1" Titanium Diaphragm Driver
- Max Power: 500 Watts
- Voltage: 110/220V
- Impedance: 8Ω
- Sensitivity: 96 dB
- Frequency Response: 55 Hz- 20KHz
- LCD Screen + USB/ SD Player + Wireless Music Stream + FM Radio + Remote Control
- Speaker Output for a passive Enclosure
- Aux In for multimedia Devices
- Blue LED Power Indicator
- Wheels and Handle for easy Transportation

STUDIO Z 12" PA woofer delivers the sound you desire by being equipped with a 12 inch high performance low-frequency driver that has a 2.5 inch Voice Coil!



DZB-1550UB

PROFESSIONAL ABS LOUDSPEAKER

- Woofer: 15"
- Voice Coil: 2.5"
- Magnet: 50 Oz
- Tweeter: 1.4" Titanium Diaphragm Driver
- Max Power: 400 Watts
- Voltage: 110/220V
- Impedance: 8Ω
- Sensitivity: 98 dB
- Frequency Response: 20 Hz- 20KHz
- LCD Screen + USB/ SD Player + Wireless Music Stream + FM Radio + Remote Control
- Speaker Output for a passive Enclosure
- Aux In for multimedia Devices
- Blue LED Power Indicator
- Wheels and Handle for easy Transportation

This STUDIO Z 15" DJ CABINET 160 WA delivers the sound you desire by being equipped with a 15 inch high performance low-frequency driver that has a 2.5 inch Voice Coil! They have a crossover design that allow them to be Bi-Amplified or used in Full Range Passive operation. These loudspeaker cabinets have a coverage area of 90 degrees by 60 degrees.



STUDIO Z

PROFESSIONAL ABS LOUDSPEAKERS

DZCMB-1542P

PROFESSIONAL ABS PASSIVE LOUDSPEAKER
WITH STAND AND CONNECTION CABLE

- Woofer: 15"
- Voice Coil: 2"
- Magnet: 40 Oz
- Tweeter: 1" Titanium Driver
- Max Power: 1000 Watts
- Impedance: 8Ω
- Sensitivity: 96dB
- Frequency Response: 45Hz~20KHz
- Wheels and Handle for easy Transportation

INCLUDED:

- 1 Speaker Stand
- 1 14Ga SPKN Cable



This passive cabinet is designed to work
in combination with DZCMB-1543BU

DZCMB-1543BU

PROFESSIONAL ACTIVE LOUDSPEAKER WITH MIC AND STAND

- 2-Way amplified Plastic activate Loudspeaker
- Woofer: 15"
- Voice Coil: 2"
- Magnet: 45 Oz
- Tweeter: 1" Titanium Driver, 9 Oz
- Max Power: 350 Watts
- Voltage: 110/220V, 50/60Hz
- Impedance: 4Ω
- Sensitivity: 94 ± 2dB
- Frequency Response: 50 Hz- 18KHz
- LCD Screen + USB/ SD Player + FM Radio + Echo + Wireless Music Stream + Remote Control + 2- wireless Microphones
- ABS resistant nylon fiber Cabinet
- Mic input with XLR & 1/4" Connector and separate Level Control
- One line input and output of stereo RCA Connector
- With 12V, 7A Battery and external 12V DC Power
- Wheels and Handle for easy Transportation

INCLUDES:

- 2 Wireless Mics
- Floor Stand
- Remote Control



STUDIO Z

PROFESSIONAL PA SYSTEM

SZC-2010

4 CHANNEL 10" PA SYSTEM WITH MICHOPHONES AND CABLES AMPLIFIER

- Input Channels: 4 Mic (XLR)/(1/4" Phono Jack) 1 RCA
- Output Power: 2x100Watts
- THD:<0.1%(@ 1KHz 10W) Tone Controls
- Bass: 100Hz±12dB
- Treble: 10KHz±12dB
- Frequency Response: 20Hz-20KHz±1dB
- Power: 115V/60Hz or 230V/50Hz
- Dimensions(WxDxH): 15.4" x 12.4" x 9.7"
- Weight: 17.3lbs (7.8Kg)
- Treble Bass Effect Volume on each Channel, Master Section, CD/TAPE Effect Master on the Rear Panel, CD/TAPE-Input (RCA Jack) on the Rear Panel
- Accessories: Microphone x 2, Microphone Cable x 2, Speaker Cable x 2

BOX

- 2-Way Configuration with passive filter, 6" x 12" horn tweeter 10" Woofer
- Frequency Response: 60Hz-18KHz
- Nominal Impedance: 8 Ohm
- Rated Power: 200RMS
- Max Power: 400 Watts
- Sensitivity: 95dB(1 Watt/1 Meter)
- Max SPL: 122dB / 1m
- Connectors: 2 x SPK4
- Dimensions: 755 x 380 x 845mm
- Net Weight: 20Kg



SZC-2012

6 CHANNEL 12" PA SYSTEM WITH MICHOPHONES AND CABLES AMPLIFIER

- Input Channels: 6 Mic (XLR)/(1/4" Phono Jack) 1 RCA
- Output Power: 2x150Watts
- THD:<0.1%(@ 1KHz 10W) Tone Controls
- Bass: 100Hz±12dB
- Treble: 10KHz±12dB
- Frequency Response: 20Hz-20KHz±1dB
- Power: 115V/60Hz or 230V/50Hz
- Dimensions(WxDxH): 17.7" x 12.4" x 9.7"
- Weight: 18lbs (8.2Kg)
- Treble Bass Effect Volume on each Channel, Master Section, CD/TAPE Effect Master on the Rear Panel, CD/TAPE-Input (RCA Jack) on the Rear Panel
- Accessories: Microphone x 2, Microphone Cable x 2, Speaker Cable x 2

BOX

- 2-Way Configuration with passive filter, 6" x 12" horn tweeter 12" Woofer
- Frequency Response: 35Hz-27KHz
- Nominal Impedance: 8 Ohm
- Rated Power: 300RMS
- Max Power: 600 Watts
- Sensitivity: 95dB(1 Watt/1 Meter)
- Max SPL: 122dB / 1m
- Connectors: 2 x SPK4
- Dimensions: 845 x 400 x 910mm
- Net Weight: 24Kg



SZC-2015

8 CHANNEL 15" PA SYSTEM WITH MICHOPHONES AND CABLES AMPLIFIER

- Input Channels: 8 Mic (XLR)/(1/4" Phono Jack) 1 RCA
- Output Power: 2x200Watts
- THD:<0.1%(@ 1KHz 10W) Tone Controls
- Bass: 100Hz±15dB
- Treble: 10KHz±15dB
- Frequency Response: 20Hz-20KHz±1dB
- Power: 115V/60Hz or 230V/50Hz
- Dimensions(WxDxH): 20.5" x 12.4" x 9.7"
- Weight: 16.5lbs (7.5Kg)
- Treble Bass Effect Volume on each Channel, Master Section, CD/TAPE Effect Master on the Rear Panel, CD/TAPE-Input (RCA Jack) on the Rear Panel
- Accessories: Microphone x 2, Microphone Cable x 2, Speaker Cable x 2

BOX

- 2-Way Configuration with passive filter, 5" x 15" horn tweeter 15" Woofer
- Frequency Response: 50Hz-18KHz
- Nominal Impedance: 8 Ohm
- Rated Power: 400RMS
- Max Power: 800 Watts
- Sensitivity: 96dB(1 Watt/1 Meter)
- Max SPL: 124dB / 1m
- Connectors: 2 x 1/4" Jack



STUDIO Z

PROFESSIONAL AMPLIFIERS



SPA-3000BT

HYBRID DIGITAL RECEIVER AMPLIFIER

- 100W x 2, 8 Ohm / 130W x 2, 4 Ohm
- AM/FM Quartz Synthesized Tuner
- Auto Station Seek and Store (60 Radio Station Storage)
- Full Function Remote Control
- IPOD/MP3 Input With Cable (3.5mm to 3.5mm Cable, White)
- USB Reader Function
- Inputs: RCA (2 Audio Sources)
- Outputs: Banana Binding Post
- Hybrid digital Receiver Amplifier
- 1 RCA Dedicated for Record Line Output
- 2 Mono RCA Dedicated for Subwoofer Output
- 1 RCA Dedicated for Preamp Output
- Separate Gain Control for Preamp and Subwoofer
- Digital Fluorescent Output Display Meter
- Removable Rack-Mount Brackets
- Dimensions: 19"(W) x 3.5" (H) x 13.2"(D)
- Weight: 16.8 LBS
- 110-220 Switchable



 **Bluetooth**



SPA-5000BT

HYBRID DIGITAL RECEIVER AMPLIFIER

- 180W x 2, 8 Ohm / 250W x 2, 4 Ohm
- AM/FM Quartz Synthesized Tuner
- Auto Station Seek and Store (60 Radio Station Storage)
- Full Function Remote Control
- IPOD/MP3 Input With Cable (3.5mm to 3.5mm Cable, Black)
- USB Reader Function
- Inputs: RCA (2 Audio Sources)
- Outputs: Banana Binding Post
- 1 RCA Dedicated for Record Line Output
- 2 Mono RCA Dedicated for Subwoofer Output
- 1 RCA Dedicated for Preamp Output
- Separate Gain Control for Preamp and Subwoofer
- Digital Fluorescent Output Display Meter
- Removable Rack-Mount Brackets
- Dimensions: 19"(W) x 3.5" (H) x 15.9"(D)
- Weight: 23.3 LBS
- 110-220 Switchable



 **Bluetooth**



STUDIO Z

PROFESSIONAL AMPLIFIERS



SPA-400

- Hybrid digital Receiver Amplifier
- 40W x 2, 8 Ohm / 80W x 2, 4 Ohm
- AM/FM Tuner Function
- Unique Synthetic Glass Panel Design
- Master Channel volume
- Separate bass/ treble control
- 2 MIC Input with Volume/ Tone/ Echo Control
- USB Reader Function with Play/ Pause/ Pre/ next control
- MP3 Input Jack
- 110V/ 220V Switchable



SPA-600BT

HYBRID DIGITAL RECEIVER AMPLIFIER

- 60W x 2, 8 Ohm / 100W x 2, 4 Ohm
- Master Channel volume/bass/treble/ balance control
- Digital AM/FM Tuner with Scan and auto store function
- 30 AM and 30 FM Stations Storage
- USB Reader Function with Play/ Pause/ Pre/ next control
- MP3 Input Jack with Cable
- A/B Speaker Output
- AUX/RECORD Output
- 2 MIC Input with Volume/ bass/treble/Echo Control
- Dimensions: 16.9"(W) x 4.7"(H) x 12.2"(D)
- Weight: 11.2 LBS
- 110V/ 220V Switchable



SPA-2000BT

HYBRID DIGITAL RECEIVER AMPLIFIER

- 75W x 2, 8 Ohm / 90W x 2, 4 Ohm
- AM/FM Quartz Synthesized Tuner
- Auto Station Seek
- IPOD/MP3 Input With Cable (3.5mm to 3.5mm Cable, Black)
- USB Reader Function
- Inputs: RCA (2 Audio Sources)
- Outputs: Banana Binding Post
- 1 RCA Dedicated for Record Line Output
- 2 Mono RCA Dedicated for Subwoofer Output
- 1 RCA Dedicated for Preamp Output
- Separate Gain Control for Preamp and Subwoofer
- Digital Fluorescent Output Display Meter
- Removable Rack-Mount Brackets
- Dimensions: 19"(W) x 3.5" (H) x 13.2"(D)
- Weight: 15.9 LBS
- 110-220 Switchable



SPA-140SEL

4-WAY DUAL-SOURCE, IMPEDANCE-MATCHING SPEAKER SELECTOR WITH ZONE VOLUME CONTROLS

- 900W total Music Power
- 300W total RMS continuous Power handling
- Heavy Duty Transformer based Impedance matching System protects against Power loss
- Left and Right channels are completely isolated for safe Operation with any Amplifier, even bridged Amplifiers
- Quick connect Terminals will accommodate 16 to 22Ga Wire
- Can be connected to two separate Amplifiers via A/B Switch
- Circuit Breaker protected



SPA-160SEL

6-WAY DUAL-SOURCE, IMPEDANCE-MATCHING SPEAKER SELECTOR WITH ZONE VOLUME CONTROLS

- 900W total Music Power
- 300W total RMS continuous Power handling
- Heavy Duty Transformer based Impedance matching System protects against Power loss
- Left and Right channels are completely isolated for safe Operation with any Amplifier, even bridged Amplifiers
- Quick connect Terminals will accommodate 16 to 22Ga Wire
- Can be connected to two separate Amplifiers via A/B Switch
- Circuit Breaker protected



STUDIO Z

POWERED MIXER



SZ-2200U

2 CHANNEL 200W POWERED MIXER W/MP3 & USB INPUT

- 2 Balanced Microphone Inputs Phantom Power
- 2 x 1/4" Line/High Impedance/Balanced Input
- Master Output: 200 Watts RMS 4 Ohms
- With USB 2.0 Terminal and LCD
- 5-Band Graphic Equalizer
- Effect Channel Control
- Tape Input, Rec Output
- Channel Tone Adjust (High/Low+/-15dB)
- AUX/TAPE/Effect Feedback Input
- Master Volume Control
- Phantom +15v
- AC 110/220v selectable



DIMENSION: 14.96" X 9.65" X 7.67"



SZ-4200U

4 CHANNEL 400W POWERED MIXER W/MP3 & USB INPUT

- 4 Balanced Microphone Inputs Phantom Power
- 4 x 1/4" Line/High Impedance/Balanced Input
- Master Output: 400 Watts RMS 4 Ohms
- With USB 2.0 Terminal and LCD
- 5-Band Graphic Equalizer
- Effect Channel Control
- Tape Input, Rec Output
- Channel Tone Adjust (High/Low+/-15dB)
- AUX/TAPE/Effect Feedback Input
- Master Volume Control
- Phantom +15v
- AC 110/220v selectable



DIMENSION: 15.17" X 12.01" X 7.87"



SZ-6200U

6 CHANNEL 600W POWERED MIXER W/MP3 & USB INPUT

- 6 Balanced Microphone Inputs Phantom Power
- 6 x 1/4" Line/High Impedance/Balanced Input
- Master Output: 600 Watts RMS 4 Ohms
- With USB 2.0 Terminal and LCD
- 5-Band Graphic Equalizer
- Effect Channel Control
- Tape Input, Rec Output
- Channel Tone Adjust (High/Low+/-15dB)
- AUX/TAPE/Effect Feedback Input
- Master Volume Control
- Phantom +15v
- AC 110/220v selectable



DIMENSION: 17.32" X 12.01" X 7.87"



SZ-8200U

8 CHANNEL 800W POWERED MIXER W/MP3 & USB INPUT

- 8 Balanced Microphone Inputs Phantom Power
- 8 x 1/4" Line/High Impedance/Balanced Input
- Master Output: 800 Watts RMS 4 Ohms
- With USB 2.0 Terminal and LCD
- 5-Band Graphic Equalizer
- Effect Channel Control
- Tape Input, Rec Output
- Channel Tone Adjust (High/Low+/-15dB)
- AUX/TAPE/Effect Feedback Input
- Master Volume Control
- Phantom +15v
- AC 110/220v selectable



DIMENSION: 20.28" X 12.01" X 7.87"

STUDIO Z

SINGLE/DUAL-CHANNEL PASSIVE DIRECT BOX



DB-01

PROFESSIONAL SINGLE-CHANNEL PASSIVE DIRECT BOX

- Input attenuation: switchable (0dB, -20dB, -40dB)
- Instrument input: 50K unbalanced TS jack
- Parallel(link) out: 50K unbalanced TS jack
- Balanced output: 600Ω balanced XLR jack
- Ground lift: switchable ground lift
- Construction: all steel chassis
- Dimensions: 4.7" x 3" x 1.8"
(120 x 76.5 x 45mm)

This box lets you connect an unbalanced, high impedance signal to a balanced, low-impedance input. It is most often used for plugging a keyboard, electric guitar, or electric bass guitar directly into a mixing console's microphone - level input. It can also be used in DJ applications.



DB-02

PROFESSIONAL DUAL-CHANNEL PASSIVE DIRECT BOX

- Input attenuation: switchable (0dB, -20dB, -40dB)
- Instrument input: 50K unbalanced TS jack
- Parallel(link) out: 50K unbalanced TS jack
- Balanced output: 600Ω balanced XLR jack
- Ground lift: switchable ground lift
- Construction: all steel chassis
- Dimensions: 5.3" x 3.7" x 1.6"
(134 x 95 x 40mm)

This box lets you connect an unbalanced, high impedance signal to a balanced, low-impedance input. It is most often used for plugging a keyboard, electric guitar, or electric bass guitar directly into a mixing console's microphone - level input. It can also be used in DJ applications.



STUDIO Z

REFLEX DRIVERS / REPLACEMENTS KAPTON VOICE COIL



SDRV-KP11

REFLEX DRIVER

- Max Input Power: 100W
- Sound Pressure: 102dB±2dB
- Impedance: 8 Ohms
- Frequency Range: 2KHz – 20KHz
- Voice Coil: 1" KSV
- Magnet: 8.5 Oz
- Common replacement for JBL Driver



SRDP-KP11

REPLACEMENT KAPTON VOICE COIL
FOR SDRV-KP11

- 1" Resin Film Super Diaphragm
- 1" High Temperature Kapton Voice Coil
- Single Pack in gift box



SDRV-R15

REFLEX DRIVER

- Max Input Power: 140W
- Sound Pressure: 106dB±2dB
- Impedance: 8 Ohms
- Frequency Range: 2KHz – 20KHz
- Voice Coil: 1.3" KSV
- Magnet: 12 Oz



SRDP-R15

REPLACEMENT KAPTON VOICE COIL
FOR SDRV-R15

- 1.3" Resin Film Super Diaphragm
- 1.3" High Temperature Kapton Voice Coil
- Single Pack in gift box



SDRV-R23

REFLEX DRIVER

- Max Input Power: 160W
- Sound Pressure: 108dB±2dB
- Impedance: 8 Ohms
- Frequency Range: 2KHz – 20KHz
- Voice Coil: 1.7" KSV
- Magnet: 33 Oz



SRDP-R23

REPLACEMENT KAPTON VOICE COIL
FOR SDRV-R23

- 1.7" Resin Film Super Diaphragm
- 1.7" High Temperature Kapton Voice Coil
- Single Pack in gift box

MUSICAL EQUIPMENT

STANDS

MS-WB812

SPEAKER WALL BRACKET

- Dimension: 11cm
- Weight Capacity: 25 Kg
- Material: Sheet Iron
- Tilt Swivel Feature: Tilt
- Tilt: 20°
- Most 8", 10" and 12" DJ Cabinets



MS-WB1215

SPEAKER WALL BRACKET

- Dimension: 11cm
- Weight Capacity: 25 Kg
- Material: Sheet Iron
- Tilt Swivel Feature: Tilt
- Tilt: 20°
- Most 12" and 15" DJ Cabinets



MS-PE12

TUBE EXTENSION

- Outer Tube(Diameter x Height): 41.7mm x 820mm
- Inner Tube(Diameter x Height): 35mm x 820mm



MUSICAL EQUIPMENT

STANDS

MAR-300

PROFESSIONAL MIXER STAND

- For 18.9 x 16.9inch (480 x 430 mm) DJ Mixer
- TILT: 45° DOWN
- Maximum DJ Mixer Weight: 60kg (132LBS)
- Product Parameter:
H: 34.6inch (880mm)
W: 17.6lbs (8kg)
- Slanting Pipe: 21.7~35.4inch (550-900mm)



MAR-LT100

SPEAKER WALL BRACKET

- Dimension: 11cm
- Weight Capacity: 25 Kg
- Material: Sheet Iron
- Tilt Swivel Feature: Tilt
- Tilt: 20°



MSKB-91

MIXER AND KEYBOARD STAND

- Adjustable Height: 20.9" - 37.8" (530-960mm)
- Bottom Pipe: 18.1" (360mm)
- Top Pipe: 14.2" (360mm)
- Loading Capacity: 110lbs (50Kg)
- Color: Black



MSKB-100

KEYBOARD STAND

- Adjustable Height: 26.8" ~ 39.4"
- Bottom Pipe: 25.2", Top Pipe: 16.1"
- Weight: 4.5Kg



MSKB-200

DOUBLE KEYBOARD STAND

- Adjustable Height: 39.4" ~ 49.6"
- Bottom Pipe: 25.2", Top Pipe: 16.1"
- Weight: 5.8 Kg



MUSICAL EQUIPMENT

STANDS



MS-9

P. A. SPEAKER STAND

- Height Adjustment Grip
- Height: 25.6"~48.0"
(650~1,220mm)
- Weight: 4.9Lbs (2.2kg)
- Supports up to: 110Lbs (50Kg)

MS-10

P.A. SPEAKER STAND

- Stand with P.A. Speaker Holder
- Height Adjustment Grip
- Height: 1000~1880mm
- Weight: 3.1kg
- Weight carrying capacity: 40kg
- Inner tube: $\Phi 35$ mm
- Outer tube: $\Phi 38$ mm
- Tube thickness: 0.7 mm

MS-11

P.A. SPEAKER STAND

- Stand with P.A. Speaker Holder
- Weight: 3.8kg
- Weight carrying capacity: 60kg
- Inner tube: $\Phi 35$ mm
- Outer tube: $\Phi 42$ mm
- Tube thickness: 0.8 mm



DS-201

- Plastic Base for
P. A. Speaker Stands



DS-203

- Aluminum Base for
P. A. Speaker Stands



DS-205

- Iron Base for
P. A. Speaker Stands



DS-303

- Base for D-11

MUSICAL EQUIPMENT

STANDS

D-3

- Floor Stand with Die Cast Base.
- Black finished



F-13

- Long Boom Desk Stand Professional Series.
- Black finished



F-8

- Boom Floor Stand with Die Cast Base.
- Black finished



MS-13

- Microphone Stand with Adjustable angle and height adjustment.
- Black finished



MS-5

- Microphone Stand with Boom Mic Holder and height adjustment.
- Black finished



MS-5CHR

- Microphone Stand with Boom Mic Holder and height adjustment.
- Chrome finished



MUSICAL EQUIPMENT

STANDS

MS-2

MICROPHONE STAND

- Stand with Microphone Holder
- Height Adjustment Grip
- Product Parameter:

Height: 37.8" – 55.1" (661-1680mm)

Weight: 9.9lbs (4.5Kg)

- Stage Microphone



MSQ-27WH

- Finger-Push height adjustment
- Quick Adjustment



MSQ-57

- Microphone Stand with Boom Mic Holder and Quick Grip Height Adjustment



MSQ-57WH

- Microphone Stand with Boom Mic Holder and Quick Grip Height Adjustment



MSQ-89

- Microphone Stand with Adjustable angle and quick grip height adjustment



MUSICAL EQUIPMENT

STANDS

F-915

- Height: 35-62 cm
- ARM Length: 40 cm
- Weight: 1.62 Kg
- PIG Iron Diecasting: 14mm



F-917

- Height: 35-55 cm
- ARM Length: 40 cm
- Weight: 2.542 Kg
- Spray Plastic: Ø180mm



MSSX-103

SAXOPHONE STAND

- Fits alto Saxophone & tenor Saxophone
- Foldaway Stand



TWO MOUNTING
OPTIONS

MS-iTBLT

MULTIMEDIA TABLET HOLDER FOR STANDS

- Fully Adjustable Multimedia Tablet Holder
- Pivot, Tilt, Rotate, Raise and Lower
- Pole Height: 18.5~32cm
- Accommodates Tablets from: 10.7cm to 20cm



MUSICAL EQUIPMENT

STANDS

F-3

- Desk Stand



F-4

- Desk Stand with Die Cast Base



F-6

- Desk stand



F-7M

- Goose Neck Desk Stand
- 8"/21 cm



MSTP-105

- TRUMPET STAND
- Foldaway Stand



MSG-22

GUITAR STAND

- Height: 43cm
- Width: 26cm
- Weight: 1.30Kg
- Compatible with: Electric Guitars, Bass Guitars, Classic Guitars, Acoustic Guitars
- For Different Sizes: 33", 36", 39"



MSG-66

GUITAR STAND

- Rubber band style neck guard to keep instrument secure.
- Folding tripod base.
- Telescoping neck for different length instruments .
- Padded yoke and base brackets to protect your guitar/bass.
- Non-slip rubber feet.
- Perfect for Electric, Acoustic or Bass guitars.



MUSICAL EQUIPMENT

STANDS

MS-GS 6

6 GUITAR DISPLAY STAND

- Height: 2.4M / 7.9'
- Outer Tube (Diameter x Thickness): 30mm x 1.32mm
- Central Tube (Diameter x Thickness): 25.4mm x 1.1mm
- Inner Tube (Diameter x Thickness): 20.2mm x 1.2mm



The guitars shown in the picture are not included.

MSG-303

3 GUITAR DISPLAY STAND

- Safely holds 3 guitar
- Width: 19.7" (50cm)
- Height: 18.9" - 29.5" (48-75cm)
- Weight: 5.1 lbs (2.3Kg)

The guitars shown in the picture are not included.



MSG-505

5 GUITAR DISPLAY STAND

- Safely holds 5 guitar
- Width: 26.7" (70cm)
- Height: 18.9" - 29.5" (48-75cm)
- Weight: 5.7 lbs (2.6Kg)

The guitars shown in the picture are not included.



MUSICAL EQUIPMENT

HOLDERS



A-1S BK

EZ SLIP-IN CLAMP

- Single microphone holder
- Malleable to fit most standard and oversized microphones
- Black color



A-1S WH

EZ SLIP-IN CLAMP

- Single microphone holder
- Malleable to fit most standard and oversized microphones
- White color



A-2

SINGLE MICROPHONE HOLDER

- Spring Type Holder
- Black color



A-3

SINGLE MICROPHONE HOLDER

- Spring Type Holder
- Black color

A-52

2 MIC HOLDER

- Break resistant
- Fits standard microphone stands for 1" and large handles
- Black color



A-54

4 MIC HOLDER

- Break resistant
- Fits standard microphone stands for 1" and large handles
- Black color



MUSICAL EQUIPMENT

HOLDERS / ACCESSORIES



A-5

MICROPHONE CLIP HOLDER MIC
STAND ACCESSORY

- Small size



A-6

MICROPHONE CLIP HOLDER MIC
STAND ACCESSORY

- Large size



A-10

SLIDE TYPE HOLDER


- Copper screw



F-SCREW

ON-STAGE STAND MIC SCREW ADAPTOR

- 5/8 male to 3/8 female screw adaptor for use with mic stands that have European 3/8" threads
- sold individually

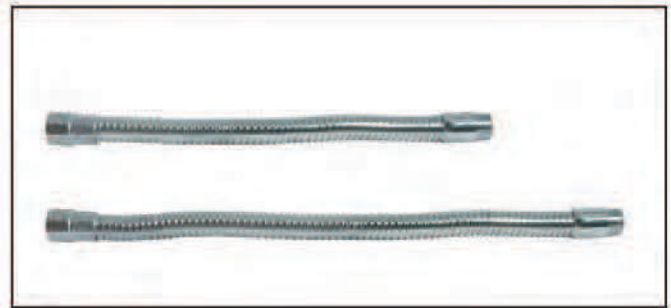

D-8 (13")

D-8-19 (19")

GOOSENECK BASE

- Metal



D-14

MALE GOOSENECK BASE

- Metal



D-15

FEMALE GOOSENECK BASE


- Metal

MUSICAL EQUIPMENT


MACHINE HEADS



AOD-017AP
• Machine Head

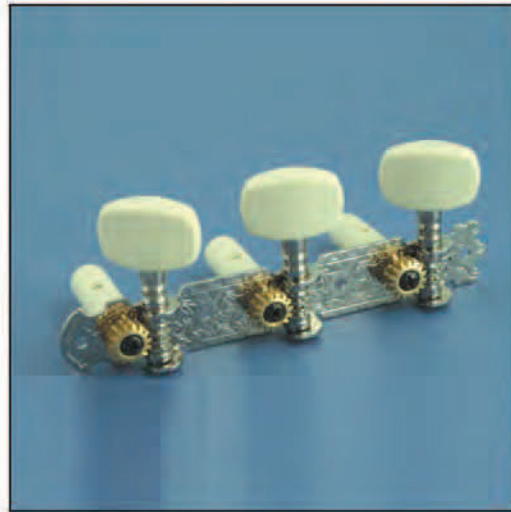

AOD-018CP
• Nickel 3 Machine
Head (long)



AOD-019CP
• Gold 3 Machine
Head (long)



AOS-020B1P
• Gold Plated 3 Machine
Head (short)



AS-016P
• Single Chrome-Plated
Locked Machine Head

MUSICAL EQUIPMENT

GUITAR CAPOS



A007A

ACOUSTIC GUITAR CAPO
• with Black finish



A007B

CLASSIC GUITAR CAPO
• with Metal finish



A007C/BK

CLASSICAL GUITAR CAPO
• with Black finish



A007D/SL-A

ACOUSTIC GUITAR CAPO
• with Polished Finish



A007D/SL-C

CLASSIC GUITAR CAPO
• with Polished Finish



AE7D/SL-A2

TUNING MODE GUITAR
• Tuning Range: B0-87
• A4 Calibration: 440Hz
• Tolerance: +/-1 cent
• Power: 3V CR2032 cell battery x1
• Pick Holder (Acoustic Only)
PICK (not included)

MUSICAL EQUIPMENT

GUITAR STRINGS



A106-H

A106-H-1

A106-H-2

A106-H-3


A106-H-4

A106-H-5

A106-H-6

CLASSICAL GUITAR STRING
• Plastic Bag


A106-H	KIT		
A106-H-1	Clear Nylon	.0285	0.72
A106-H-2	Clear Nylon	.0325	0.83
A106-H-3	Clear Nylon	.041	1.04
A106-H-4	Silver-Plated Copper Wound	.030	0.76
A106-H-5	Silver-Plated Copper Wound	.036	0.91
A106-H-6	Silver-Plated Copper Wound	.044	1.12



A107-N

CLASSICAL GUITAR STRING
• Plastic Bag

A107-N	KIT		
	Clear Nylon	.028	0.71
	Clear Nylon	.032	0.81
	Clear Nylon	.040	1.02
	Silver-Plated Copper Alloy Wound	.030	0.76
	Silver-Plated Copper Alloy Wound	.035	0.89
	Silver-Plated Copper Alloy Wound	.043	1.09



AC136BK-N

CLASSICAL GUITAR STRING
• Black Nylon
• Nylon Core
• Coated Copper Wound
• Proprietary Anti-Rust Coat

AC136BK-N	KIT		
	Black Nylon	.028	0.71
	Black Nylon	.032	0.81
	Coated Copper Alloy Wound	.025	0.63
	Coated Copper Alloy Wound	.029	0.74
	Coated Copper Alloy Wound	.035	0.89
	Coated Copper Alloy Wound	.043	1.09

MUSICAL EQUIPMENT

GUITAR STRINGS

A2012

- Acoustic Guitar Stainless Steel
- Steel Core
- Coated Copper Alloy Wound



A306-SL (Complete Kit)

- A306-SL-1
- A306-SL-2
- A306-SL-3
- A306-SL-4
- A306-SL-5
- A306-SL-6
- A307-SL-3



- Acoustic Guitar, Stainless Steel, Silver Plated, Copper Wound, Extra-Light strings

A2012	KIT	inch	mm
	Stainless Steel	.010	0.25
	Stainless Steel	.010	0.25
	Stainless Steel	.014	0.36
	Stainless Steel	.014	0.36
	Coated Copper Alloy Wound	.022	0.56
	Stainless Steel	.008	0.20
	Coated Copper Alloy Wound	.030	0.76
	Stainless Steel	.012	0.30
	Coated Copper Alloy Wound	.040	1.02
	Stainless Steel	.018	0.46
	Coated Copper Alloy Wound	.050	1.27
	Coated Copper Alloy Wound	.026	0.66


A306-SL		inch	mm
E-1st	Stainless Steel	.011	0.25
B-2nd	Stainless Steel	.015	0.38
G-3rd	Silver-Plated Copper Alloy Wound	.024	0.61
D-4th	Silver-Plated Copper Alloy Wound	.032	0.81
A-5th	Silver-Plated Copper Alloy Wound	.042	1.07
E-6th	Silver-Plated Copper Alloy Wound	.052	1.32

A307-SL		inch	mm
E-1st	Stainless Steel	.011	0.25
B-2nd	Stainless Steel	.015	0.38
G-3rd	Silver-Plated Copper Alloy Wound	.024	0.61
D-4th	Silver-Plated Copper Alloy Wound	.032	0.81
A-5th	Silver-Plated Copper Alloy Wound	.042	1.07
E-6th	Silver-Plated Copper Alloy Wound	.052	1.32

A308-SL (Complete Kit)

- A308-SL-1
- A308-SL-2
- A308-SL-3

- Acoustic Guitar, Stainless Steel, Silver Plated, Copper Wound, Extra-Light strings



A406-L

- Acoustic Guitar, Stainless Steel Bronze Wound, Light strings



A308-SL SUPER LIGHT		
NOTE	INCH	mm
E	.011	0.28
B	.015	0.38
G	.024	0.61
D	.032	0.81
A	.042	1.07
E	.052	1.32



A406-L	KIT	inch	mm
	Stainless Steel	.012	0.30
	Stainless Steel	.016	0.41
	Coated Copper Alloy Wound	.024	0.61
	Coated Copper Alloy Wound	.032	0.81
	Coated Copper Alloy Wound	.042	1.07
	Coated Copper Alloy Wound	.053	1.35

MUSICAL EQUIPMENT

GUITAR STRINGS

A506-SL (Complete Kit)

- A506-SL-1
- A506-SL-2
- A506-SL-3
- A506-SL-4
- A506-SL-5
- A506-SL-6



• Electric Guitar, Stainless Steel, Nickel Round wound, extra-light strings.

A506-SL	KIT		
A506-SL-1	Plated Steel	.009	0.23
A506-SL-2	Plated Steel	.014	0.28
A506-SL-3	Plated Steel	.016	0.41
A506-SL-4	Nickel Alloy Wound	.024	0.61
A506-SL-5	Nickel Alloy Wound	.032	0.81
A506-SL-6	Nickel Alloy Wound	.042	1.07

- A507-SL
- A507-SL-1
- A507-SL-2
- A507-SL-3
- A507-SL-4
- A507-SL-5
- A507-SL-6



• Electric Guitar, Plated Steel, Nickel Alloy Wound, Nickel-Plated Ball-End, Plastic Bag

A507-SL	KIT		
E-1st	Plated Steel	.009	0.23
B-2nd	Plated Steel	.011	0.28
G-3rd	Plated Steel	.016	0.41
D-4th	Nickel Alloy Wound	.024	0.61
A-5th	Nickel Alloy Wound	.032	0.81
E-6th	Nickel Alloy Wound	.042	1.07

- A606(4)-M-1
- A606(4)-M-2
- A606(4)-M-3
- A606(5)-M
- A606(6)-M




• Acoustic Guitar, Stainless Steel, Silver Plated, Copper Wound, Extra-Light strings

A606-M	KIT	inch	mm
	Nickel Alloy Wound	.032	0.81
	Nickel Alloy Wound	.045	1.14
	Nickel Alloy Wound	.065	1.65
	Nickel Alloy Wound	.085	2.16
	Nickel Alloy Wound	.105	2.67
	Nickel Alloy Wound	.130	3.29

A607(4)-M

• Electric Bass Strings
• Steel Core
• Nickel Alloy Wound
• Plastic Bag



A607 (4)-M	KIT	inch	mm
	Nickel Alloy Wound	.045	1.14
	Nickel Alloy Wound	.065	1.65
	Nickel Alloy Wound	.085	2.16
	Nickel Alloy Wound	.105	2.67

A703

• Violin String
• Steel Core
• Nickel Silver Wound
• Plastic Bag



A703	KIT High-Grade	Steel Core, Nickel Silver Wound
	Steel Core, Nickel Silver Wound	Steel Core, Nickel Silver Wound
	Steel Core, Nickel Silver Wound	Steel Core, Nickel Silver Wound
A703A	KIT Middle-Grade	Stainless Steel
	Steel Core, Nickel Silver Wound	Steel Core, Nickel Silver Wound
	Steel Core, Nickel Silver Wound	Steel Core, Nickel Silver Wound
	Steel Core, Nickel Silver Wound	Steel Core, Nickel Silver Wound

A705

A705-1
A705-2
A705-3
A705-4
• Violin String
• Coated Steel Core
• Nickel Chromium Wound
• Plastic Bag



A705	KIT	
	E-1st	Stainless Steel
	A-2nd	Steel Core, Nickel Chromium Wound
	D-3rd	Steel Core, Nickel Chromium Wound
	G-4th	Steel Core, Nickel Chromium Wound

MUSICAL EQUIPMENT

GUITAR STRINGS



AP-12C

- Celluloid Picks
- Constellation



AP-12G

- Projecting Nylon
- Guitar Picks
- Clamshell



AP100A

- Colorful Celluloid Picks
- Assorted colors and thickness
- 100 pcs



AP100N

- PBP Celluloid
- Thumb Picks
- 100 pcs



AP600A

- Colourful Celluloid
- Guitar Picks
- .46mm, .71mm, .81mm
- .96mm, 1.2mm, 1.5mm
- 600 pcs



A010A

Triangle pick holder



A010B

Heart-Shape pick holder

MUSICAL EQUIPMENT

TAMBOURINES



ATB002-BL
ATB002-BLK
ATB002-GR
ATB002-PINK



ATB003-BL
ATB003-RED
ATB003-WH
ATB003-YW

• Fish Tambourine




ATB004-BL
ATB004-BLK
ATB004-GR
ATB004-YW

• Star Tambourine



ATB005-BL
ATB005-BLK
ATB005-GR
ATB005-RED
ATB005-WH
ATB005-YW

• Single-Ring Tambourine



ATB009

• Moon Tambourine



MUSICAL EQUIPMENT

TAMBOURINES

ATM-810BL

ATM-810RD

ATM-810WH

- Hand-Held Tambourine with Metal Jingles
- Most Comfortable and unique design
- Natural wrist shake ever produced
- High-quality metal jingles
- Sonorous and amusing sound
- Careful making
- Tambourine popular among the music lovers



ATM-818BL

ATM-818GR

ATM-818RD

ATM-818WH

- Hand-Held Tambourine with Metal Jingles
- Most Comfortable and unique design
- Natural wrist shake ever produced
- High-quality metal jingles
- Sonorous and amusing sound
- Careful making
- Tambourine popular among the music lovers



ATM-820BL

ATM-820GR

ATM-820RD

ATM-820WH

- Hand-Held Tambourine with Metal Jingles
- Most Comfortable and unique design
- Natural wrist shake ever produced
- High-quality metal jingles
- Sonorous and amusing sound
- Careful making
- Tambourine popular among the music lovers



ATM-830BL

ATM-830GR

ATM-830RD

ATM-830WH

- Hand-Held Tambourine with Metal Jingles
- Most Comfortable and unique design
- Natural wrist shake ever produced
- High-quality metal jingles
- Sonorous and amusing sound
- Careful making
- Tambourine popular a



ATM-831BL

ATM-831GR

ATM-831WH

- Hand-Held Tambourine with Metal Jingles
- Most Comfortable and unique design
- Natural wrist shake ever produced
- High-quality metal jingles
- Sonorous and amusing sound
- Careful making
- Tambourine popular among the music lovers



MUSICAL EQUIPMENT

TAMBOURINES



ATM-DOV-8
• 8" Tambourine



ATM-DOV-10
• 10" Tambourine



ATM-HND8
• 8" Tambourine



ATM-HND10
• 10" Tambourine



ATM-SHI-8
• 8" Tambourine



ATM-SHI-10
• 10" Tambourine



ATM-W6
• 6" Tambourine



ATM-W8
• 8" Tambourine



ATM-W10
• 10" Tambourine

MUSICAL EQUIPMENT

COWBELLS

ACB-05

5" MOUNTABLE COWBELL FOR DRUMSET

- Designed with the drum kit player in mind
- High grade 14-gauge steel
- Rich, cutting sound is low pitched and moderately dry



BCB-05

- Designed with the drum kit player in mind
- High grade 14-gauge steel
- Rich, cutting sound is low pitched and moderately dry
- 5"



ACB-06

6" MOUNTABLE COWBELL FOR DRUMSET

- Designed with the drum kit player in mind
- High grade 14-gauge steel
- Rich, cutting sound is low pitched and moderately dry



BCB-06

- Designed with the drum kit player in mind
- High grade 14-gauge steel
- Rich, cutting sound is low pitched and moderately dry
- 6"



ACB-07

7" MOUNTABLE COWBELL FOR DRUMSET

- Designed with the drum kit player in mind
- High grade 14-gauge steel
- Rich, cutting sound is low pitched and moderately dry



BCB-07

- Designed with the drum kit player in mind
- High grade 14-gauge steel
- Rich, cutting sound is low pitched and moderately dry
- 7"



ACBP-5BL

5" BLUE PERCUSSION

- Plastic Cowbell



ACBP-6RD

5" RED PERCUSSION

- Plastic Cowbell



MUSICAL EQUIPMENT

DRUMSTICKS

DS-M5A

- 5A Wood Tip
- Maple Drumsticks



DS-M7A

- 7A Wood Tip
- Maple Drumsticks



DS-M5A-NL

- 5A Nylon Tip
- Maple Drumsticks



DS-M5A-SM

- 5A Small Wood Tip
- Maple Drumsticks

DS-M7A-NL

- 7A Nylon Tip
- Maple Drumsticks



DS-M5B

- 5B Wood Tip
- Maple Drumsticks



DS-M7B

- 7B Wood Tip
- Maple Drumsticks



DS-OK5A

- 5A Wood Tip
- Oak Drumsticks



DS-OK7A

- 7A Wood Tip
- Oak Drumsticks



DS-OK5A-BK

- 5A Wood Tip
- Oak Black Drumsticks



DS-OK7A-BK

- 7A Wood Tip
- Oak Black Drumsticks



DS-OK5A-NL

- 5A Nylon Tip
- Oak Drumsticks



DS-OK7A-NL

- 7A Nylon Tip
- Oak Drumsticks



MUSICAL EQUIPMENT

BONGOS / CHROMACAST THRONE

DSS-174

- Tube Dia 25mm
- Faceplate Dia 28cm
- Zinc Alloy Plating
- Adjustable Height
- Five Adjustable Positions



DSS-417SCRW

- Tube Dia 29mm
- Faceplate Dia 28cm
- Zinc Alloy Plating
- Adjustable Height
- Adjustable From:
45.5cm(LOWEST)-61cm(HIGHEST)



ABG-10

- Plastic Bongo
- 7" & 8" Plastic Shell



ABG-32

- 7" & 8" Double Color



ABG-40

- 7" & 8" Wooden Shell

MUSICAL EQUIPMENT

TOLEDO GUITARS

GUITAR BAG INCLUDED



Toledo



ACG-3910CEQ-SB

39" ELECTRO ACOUSTIC CUTAWAY GUITAR

- 5 band EQ with mic.
- LCD display screen, chromatic tuner display.
- Power: 1 x 9v battery.
- with 1/4" and XLR socket Output
- Color: Sun Burst




GUITAR BAG INCLUDED



ACG-3910CEQ-WH

39" ELECTRO ACOUSTIC CUTAWAY GUITAR

- 5 band EQ with mic.
- LCD display screen, chromatic tuner display.
- Power: 1 x 9v battery.
- with 1/4" and XLR socket Output
- Color: White

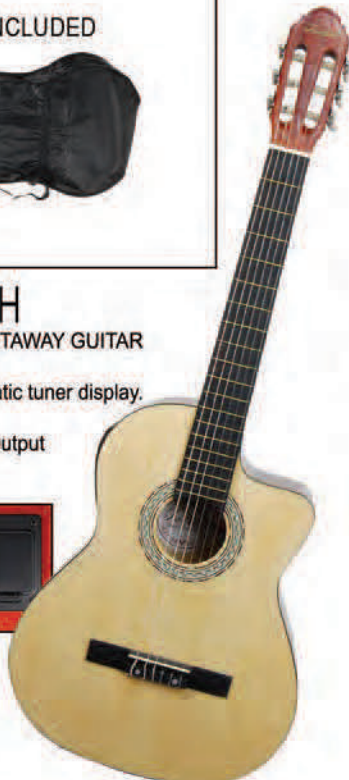

GUITAR BAG INCLUDED



ACG-3910CEQ-YH

39" ELECTRO ACOUSTIC CUTAWAY GUITAR

- 5 band EQ with mic.
- LCD display screen, chromatic tuner display.
- Power: 1 x 9v battery.
- with 1/4" and XLR socket Output
- Color: Yellow



MUSICAL EQUIPMENT

TOLEDO GUITARS

GUITAR BAG INCLUDED



ACG-3910BL

39" ACOUSTIC GUITAR

• Color: Blue



GUITAR BAG INCLUDED



ACG-3910SB

39" ACOUSTIC GUITAR

• Color: Sun Burst



GUITAR BAG INCLUDED



ACG-3910WH

39" ACOUSTIC GUITAR

• Color: White



GUITAR BAG INCLUDED



ACG-3910YH

39" ACOUSTIC GUITAR

• Color: Yellow



MUSICAL EQUIPMENT

ELECTRIC GUITARS & BASS

EB-305BK

5 STRING ELECTRIC BASS

- Construction Bolt-on
- Scale Length: 34"
- Fingerboard: Rosewood
- Radius: 10"
- Frets: 24
- Body: Alder
- Neck: Maple
- Bridge: Die-cast
- Pickups: Humbucking Pickup X 2
- Controls: Master Volume, Pan-Pot, 2-Band EQ



EB-306BK

6 STRING ELECTRIC BASS

- Construction Bolt-on
- Scale Length: 34"
- Fingerboard: Rosewood
- Radius: 10"
- Frets: 24
- Body: Alder
- Neck: Maple
- Bridge: Die-cast
- Pickups: Humbucking Pickup X 2
- Controls: Master Volume, Pan-Pot, 2-Band EQ



EG-101BK

- Electric Guitar
- 3/4 Size
- Powerful pickup
- All wood body
- Steel reinforced bolt-on neck
- Sealed die-cast tuners
- Fully Adjustable bridge
- Guitar strap buttons built in
- Great for beginners, or as a travel guitar
- Built-in internal AMP with 3" speaker
- Includes guitar strap



MUSICAL EQUIPMENT

ELECTRIC GUITARS

EG-202BK

- Electric Guitar
- Body: solidwood
- Neck: maple
- Fingerboard :Rosewood
- Fret: 22 frets
- Pickups:2 covered hum bucking
- Control: 2v 2T & 3 way toggle s/w
- Scale length: 648mm
- Color: Black



EG-303BK

- Electric Guitar
- Body: solidwood
- Neck: maple
- Fingerboard :Rosewood
- Fret: 22 frets
- Pickups:TELE PICKUPS
- Control: 1v 1T & 3 way toggle s/w
- Scale length: 648mm
- Hardware: single rock



EG-CP300RD (Red)

ELECTRIC GUITAR STARTER PACK

- Guitar strap
- Carrying bag
- Chord chart
- 1/4" Guitar cable(10')
- Turning tools
- Tremolo arm
- Guitar picks
- Pitch pipe

ELECTRIC GUITAR:

- Full-size Double Cutaway Electric Guitar with 22 Frets
- 3 Single-coil Pickups
- 5-way Selector Swicth
- Vintatge Bridge with Tremolo System
- Maple Neck and Maple Fingerboard
- Color: Red

TUNER:

- Built-in Microphone

AMPLIFIER:

- 10 Watts Guitar Amplifier
- 5" Speaker
- Input and Headphone Jacks
- Volume, Bass and Treble Controls



MUSICAL EQUIPMENT

VIOLINS


VL-800K

- Neck:maple
- Top:solid spruce
- Body&Side:solid maple
- Back:linden plywood
- Fingerboard:hardwood
- Bridge:maple
- Form case,bow




VL-810K

- Neck:maple
- Top:solid spruce
- Body&Side:solid maple
- Back:linden plywood
- Fingerboard:hardwood
- Bridge:maple
- Form case,bow

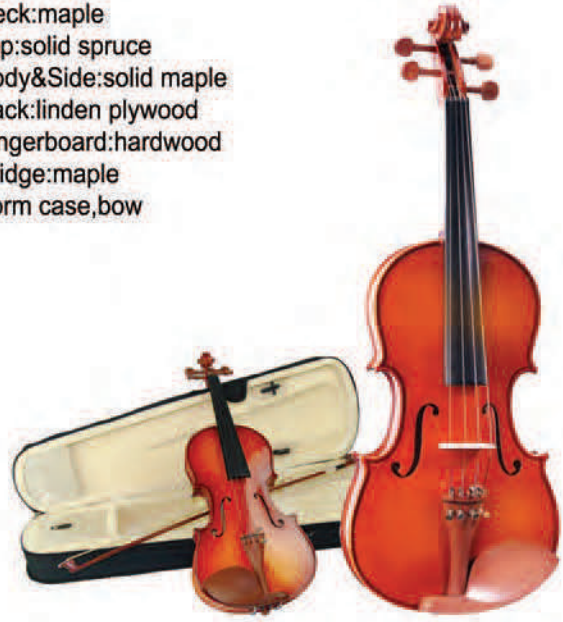

VL-BOW-1

- Body: Paorosa solid wood
- Frong: Ebony
- Double eye (with shell and metal ring)
- Shape: ROUND

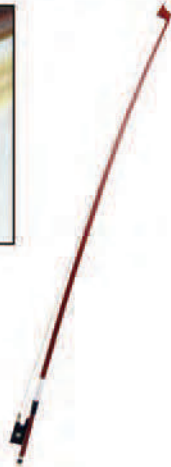

VL-BOW-CCT

- Body: Paorosa solid wood
- Frong: Ebony
- Double Eye (with shell and metal ring)
- Shape: Octagonal



VLB-44MW

- A class violin bridge
- Includes 2 pcs.



MUSICAL EQUIPMENT

EQUALIZERS / PASSIVE DIRECT BOX



EQ-A4T

GUITAR EQUALIZER
• Digital 4-Band equalizer



EQ-A300

GUITAR EQUALIZER
• 3-Band equalizer



EQ-A500

GUITAR EQUALIZER
• 5-Band equalizer



DB-01

PROFESSIONAL SINGLE-CHANNEL PASSIVE DIRECT BOX

- Input attenuation: switchable (0dB, -20dB, -40dB)
- Instrument input: 50K unbalanced TS jack
- Parallel(link) out: 50K unbalanced TS jack
- Balanced output: 600 Ω balanced XLR jack
- Ground lift: switchable ground lift
- Construction: all steel chassis
- Dimensions: 4.7" x 3" x 1.8"
(120 x 76.5 x 45mm)



DB-02

PROFESSIONAL DUAL-CHANNEL PASSIVE DIRECT BOX

- Input attenuation: switchable (0dB, -20dB, -40dB)
- Instrument input: 50K unbalanced TS jack
- Parallel(link) out: 50K unbalanced TS jack
- Balanced output: 600 Ω balanced XLR jack
- Ground lift: switchable ground lift
- Construction: all steel chassis
- Dimensions: 5.3" x 3.7" x 1.6"
(134 x 95 x 40mm)



MUSICAL EQUIPMENT

EQUALIZERS / PASSIVE DIRECT BOX

A1-GT10

- 3 in 1 Guitar, Bass, Chromatic Tuner



MTNR-7CLP

- Digital Clip Tuner
- Signal Receipt Method: MIC & CLIP
- A4 Frequency Range: 435~445Hz
- Tuning Mode: For Guitar, Bass & Violin
- Tuning Range: 0A~7C
- Tolerance: ≤1 cent
- LDC Display: Color Back-Light Display
- Red to Green Status Indicator
- Battery: CR2032
- Size: 53x80x43(mm)
- Weight: 53G



PICKUP-50

- Standard Pickup
- Easy to install to most acoustical instruments



PICKUP-60V

- Violin Pickup



PICKUP-70G

- Acoustic Guitar Pickup



PICKUP-105G

- Acoustic Guitar Pickup
- Can fit 3-11/16 to 4-1/8 (94-105mm) sound hole
- Excellent bass midrange response and soft acoustic tone



GM-130

- Acoustic guitar pickup



EQ-A7545R

- ACOUSTIC GUITAR EQUALIZER
- 4 Band guitar equalizer

MUSICAL EQUIPMENT

INSTRUMENTS / ACCESSORIES

GUIRO-310B

- Percussion instruments
- 15"
- Diameter 3"



GUIRO-412

- Percussion instruments
- 12"
- Diameter 4"



GUIRO-512

- Percussion instruments
- 12"
- Diameter 5"



GUIRO-612

- Percussion instruments
- 12"
- Diameter 6"



ARC-820

- Ivory recorder
- Includes a Bag
- Lyons Recorder Cleaning Rod
- Approximately 12.50" long.



AHM-160

- Harmonica
- Metal & Wood
- Silver



AO41SE-G

- SOUND EGGS
- 1 Unit = 28 pcs.



AO42SE

- SOUND EGGS
- 1 Unit = 2 pcs.



MUSICAL EQUIPMENT

GUITAR STRAP ACCESSORIES

ZGS-1

• Guitar strap



ZGS-7

• Guitar strap



ZGS-8

• Guitar strap



ZGS-9

• Guitar strap



ZGS-10

• Guitar strap



ZGS-P140BK

• Guitar strap



ZGS-P140BL

• Guitar strap



ZGS-P140GR

• Guitar strap



ZGS-P140MI

• Guitar strap



ZGS-P140RD

• Guitar strap



A040-LB

• Guitar Strap



MUSICAL EQUIPMENT

ACCESSORIES



A013-3

- Violin rosin for orchestra or solo work



A013B

- High grade violin-viol-a-cello rosin



A009AP

- Guitar String Winder



CONTENTS

- Water 89.0%
- ISO PARH 5.0%
- Silicone Oil 5.8%
- Jasmine Oil 0.1%
- Pine Oil 0.1%


A039PO-S

- Guitar Polish



GUIRO-BRUSH-12

- Guiro brush
- Length: 305mm/12"

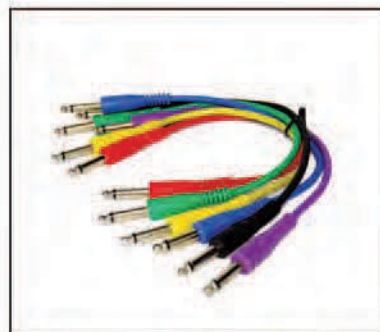

FXC-61414

- Jumper Cables for Guitar Pedals
- 6 Color Coded: red, blue, yellow, green, black & purple

MUSICAL EQUIPMENT

ACCESSORIES



BVO-140

- Value oil
- 1.403



BVL-035

- Value Lubricant
- 0.3503



GB-12EL

- Electrical Guitar Bag non woven fabric pearl cotton



GBN-01CL-39

- 39" Guitar strap



GBN-02CL

- 39" Guitar strap



MICS

MICROPHONES

DM-116D BLACK

DUAL IMPEDANCE

- Black color



DM-18K

DYNAMIC

- Metal Construction
- 600 Ohm
- 60-16KHz @ 1KHz
- -74 ± 3dB



DM-212 BLUE

DYNAMIC

- 600 Ohm
- 60-16K Hz
- -74 ± 3dB



DM-301

DYNAMIC

- Metal Construction
- 600 Ohm
- 60-16KHz @ 1KHz
- -74 ± 3dB



DM-605

DYNAMIC

- Metal Construction
- 600 Ohm
- 60-16KHz @ 1KHz
- -74 ± 3dB



DM-9

DYNAMIC

- 600 Ohm
- 50-16KHz
- -52dB ± 3dB



DMG-01G

METAL WELD, HARD AND DURABLE

- Replaces most common Microphone Grills



S-1

FOAM BALL-TYPE MIC WINDSCREEN

- Set of 5
- Assorted



S-1B

FOAM BALL-TYPE MIC WINDSCREEN

- Set of 5
- Black



MICS

PROFESSIONAL MICROPHONES

DM-28

UNI-DIRECTIONAL DYNAMIC MICROPHONE

- Professional Sound Quality for Vocals and Instruments.
- Unidirectional polar pattern Reduces Pickup of Undesired off-axis Sounds.
- Well suited for on stage Vocal/Instrument use as well as for the Karaoke Enthusiast.
- Impedance: 600 Ohm
- Sensitivity: -52dB \pm 3dB
- Frequency Response: 50 - 18KHz
- Plastic body



DM-38

DYNAMIC MICROPHONE

- Professional Sound Quality for Vocals and Instruments.
- Unidirectional polar pattern Reduces Pickup of Undesired off-axis Sounds.
- Well suited for on stage Vocal/Instrument use as well as for the Karaoke Enthusiast.
- Impedance: 600 Ohm
- Sensitivity: -53dB \pm 3dB
- Frequency Response: 40 - 17KHz)
- Metal body
- Switchless



DM-48

PROFESSIONAL DYNAMIC MICROPHONE

- Professional Sound Quality for Vocals and instruments
- Unidirectional Polar pattern Reduces Pickup of Undesired off-axis Sounds
- Well suited for on-stage Vocal/Instrument use as well as for the Karaoke Enthusiast
- Dynamic Uni-directional Microphone
- Impedance: 600 Ohm
- Sensitivity: -53dB \pm 3dB
- Frequency Response: 40-17KHz



DM-88

PROFESSIONAL DYNAMIC MICROPHONE

- Professional Sound Quality for Vocals and Instruments.
- Unidirectional polar pattern Reduces Pickup of Undesired off-axis Sounds.
- Well suited for on stage Vocal/Instrument use as well as for the Karaoke Enthusiast.
- Impedance: 600 Ohm
- Sensitivity: -53dB \pm 3dB
- Frequency Response: 40 - 18KHz
- Metal body
- Switchless



DM-88WH

PROFESSIONAL DYNAMIC MICROPHONE

- Professional Sound Quality for Vocals and Instruments.
- Unidirectional polar pattern Reduces Pickup of Undesired off-axis Sounds.
- Well suited for on stage Vocal/Instrument use as well as for the Karaoke Enthusiast.
- Impedance: 600 Ohm
- Sensitivity: -53dB \pm 3dB
- Frequency Response: 40 - 18KHz
- White metal body
- Switchless



MICS

PROFESSIONAL MICROPHONES

DM-35B

MEETING MICROPHONE

- Output Impedance: 75 Ohm
- Power Supply: DC 3V / DC 48V
- Reference Sound-Receiving Distance: 20 - 50cm
- Capsule Type: Condenser
- Polar Pattern: Ultra-Cardioid
- Frequency Response: 40Hz - 16KHz
- Sensitivity: -40±2dB



GW-750

UNIDIRECTIONAL

- 30 Meter Range
- 600 Ohm
- 100-10K Hz
- -72 dB
- Includes Receiver, Antenna & Wire



STW-7802

UHF WIRELESS MICROPHONE

(Transmitter) hand-held:

- Transmitter power: <30mW
- Spurious emission: < 40dB (with carrier)
- Battery voltage: AA 1.5V x 2
- Battery life: >10 hours

(Receiver) Desk-Top:

- Operating frequency: UHF band(730-865MHz)
- Oscillation mode: Quartz controlled fixed frequency
- Stability: 2uV@sinad=12 dB
- Max Deviation Range: 50 KHz
- SIN Ratio: >105dB
- T.H.D.: <0.5%@ 1KHz
- Image Rejection: 85 dB Typical
- Spurious rejection: 75dB typical
- Frequency Response: 60Hz-16KHz
- Squelch Control: dual-squelch circuit
- Max Output level: Balanced: 0-400mV, unbalanced: 0-300mV
- Power Supply: External DC Power Supply, 0.4A, 12-15V DC, Auto voltage: 100-240V 50/60Hz
- Dimensions: 7.2" x 4.7" x 1.8" (184 x120 x 46mm)
- Dual Channel fixed frequency wireless microphone
- 14 frequencies available
- Patent mould design for receiver
- Reliable SMT technology
- Dual filter design makes better anti-interference ability
- High performance capsule
- Each channel has individual volume control
- Balanced and line output available



GW-901

SINGLE CHANNEL FM WIRELESS MICROPHONE SYSTEM

- Using VHF 200-270MHz Band to Avert Interfering Frequencies.
- Using Quartz Crystal Oscillating Circuits to Provide a Steady Frequency.
- Specially Designed Compounding Circuit that Strongly Improves S/N Ratio.
- Multi-level Quiet Control Uses the Mutes System to Avoid Signal Interference on Activation and Shut Down.
- Uses Dynamic Cardioid Direct Cartridge for Bright and Clear Sound.
- Carrier Frequency: VHF 200-270MHz
- Stability: <±20ppm
- Dynamic Range: >90dB
- T.H.D.: <0.5%
- Frequency Response: 40Hz-15KHz ± 3dB
- Audio Out: 0-500mV



MICS

PROFESSIONAL MICROPHONES

DIM-620

UNIDIRECTIONAL INSTRUMENT MICROPHONE

- Professional Sound Quantity for Vocals and Instruments.
- Unidirectional Polar pattern Reduces Pickup of Undesired off-axis Sound.
- Well suited for on-stage Vocal/instrument use as well as for the Karaoke Enthusiast.
- Impedance: 250 Ohm \pm 10%
- Sensitivity: -53dB \pm 3dB
- Frequency Response: 40 - 18KHz
- Cable Length: 16' (5m approx)



GW-3002

2 CHANNELS WIRELESS MICROPHONE SYSTEM

- Using VHF 88 - 106MHz Band to Avert Interfering Frequencies
- Impedance: 600 Ohm
- Dynamic Range: >80dB
- Distortion Rate: <1%
- Frequency Response: 80 - 17KHz \pm 3dB
- with Quartz crystal



GW-4004

4 CHANNELS WIRELESS MICROPHONE SYSTEM

- Using VHF 200 - 270MHz Band to Avert Interfering Frequencies.
- Using Quartz Crystal Oscillating Circuits to Provide a Steady Frequency.
- Specially Designed Compounding Circuit that Strongly Improves S/N Ratio.
- Multi-level Quiet Control Circuit Uses the Mute System to Avoid Signal Interference on Activation and Shut Down.
- Uses Dynamic Cardioid Direct Cartridge for Bright and Clear Sound.
- With 1/4" Sockets Conveniently Connects to Any Equipment.



GW-5002

2 CHANNELS FM WIRELESS MICROPHONE SYSTEM

- Using VHF200-270MHz Band to Avert Interfering Frequencies
- Using Quartz Crystal Oscillating Circuits to Provide a Steady Frequency
- Specially Designed Compounding Circuit that Strongly Improves S/N Ratio
- Multi-level Quiet Control Circuit Uses the mute System to Avoid Signal Interference on Activation and Shut Down
- Uses Dynamic Cardioid Direct Cartridge for Bright and Clear Sound
- with 1/4" Socket Conveniently Connects to Any Equipment
- with Quartz crystal



GW-6002

2 CHANNELS WIRELESS, MICROPHONE SYSTEM

- Carrier Frequency: UHF 500-580MHz
- Stability: < \pm 20ppm
- Dynamic range: >98dB
- T.H.D: <0.5%
- Frequency Response: 40Hz-18 KHz \pm 3dB
- Audio Out:
Balanced: 0-700mV
Mix: 0-300mV



GW-7011

2 CHANNELS WIRELESS, MICROPHONE SYSTEM

- Carrier Frequency: UHF 500-580MHz
- Stability: < \pm 20ppm
- Dynamic range: >98dB
- T.H.D: <0.5%
- Frequency Response: 40Hz-18 KHz \pm 3dB
- Audio Out:
Balanced: 0-700mV
Mix: 0-300mV



GW-7011RBP

REPLACEMENT BODY PACKAGE

MICS

PROFESSIONAL MICROPHONES

GW-8002

FM WIRELESS MICROPHONE SYSTEM

- Carrier Frequency: UHF 740 - 840MHz
- Stability: $<\pm 20$ ppm
- Dynamic range: >98 dB
- T.H.D.: $<0.5\%$
- Frequency Response: 40Hz - 18KHz ± 3 dB
- Audio Out: Balanced:
0 - 700mV / Mix: 0 - 300mV



GW-8701EM

PROFESSIONAL UHF WIRELESS MONITOR SYSTEM

- Frequency Range and Transmitter Output Level Band: UD
Frequency Range: 740~770MHz Transmitter Output Level: 10dBm
- Operating Range Under Typical Conditions 50m
- Audio Frequency Response(± 3 dB) 80 Hz ~ 16 KHz
- Dynamic Range >90 dB A-weighted
- Operating Temperature Range -10°C to $+50^{\circ}\text{C}$



GW-9002

FM WIRELESS MICROPHONE SYSTEM

- Using UHF 740-840MHz Band to Avert Interfering Frequencies
- Using Quartz Crystal Oscillating Circuits to Provide a Steady Frequency
- Specially Designed Compounding Circuit that Strongly Improves S/N Ratio
- Multi-level Quiet Control Circuit Uses the Mute System to Avoid Signal Interference on Activation and Shut Down
- Uses Dynamic Cardioid Direct Cartridge for Bright and Clear Sound
- With Both XLR and 1/4" Sockets Conveniently Connects to Any Equipment
- Carrier Frequency: UHF 740-840MHz
- Stability: $<\pm 20$ ppm
- Dynamic Range: >98 dB
- T.H.D.: $<0.5\%$
- Frequency Response: 40Hz-18KHz ± 3 dB
- Audio Out: 0-400mV(Balanced: 0-2V)



GW-9004

4 CHANNELS FM WIRELESS MICROPHONE SYSTEM

- Carrier Frequency: UHF 740-840MHz
- Stability: $<\pm 20$ ppm
- Dynamic Range: >95 dB
- T.H.D.: $<0.5\%$
- Frequency Response: 40Hz-18KHz ± 3 dB
- Audio Out: 0-400mV(Balanced: 0-2V)



MICS

REPLACEMENT VOICE COIL



CD-A1

FOR DM-301

- Pattern: Uni-directional
- Frequency Response: 50~14KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A2

FOR GW-8002

- Pattern: Uni-directional
- Frequency Response: 40~18KHz
- Sensitivity: -53dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A3

FOR PG48

- Pattern: Uni-directional
- Frequency Response: 50~ 18KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 500 Ω \pm 10%



CD-A4

FOR DM-301

- Pattern: Uni-directional
- Frequency Response: 50~15KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A5

FOR DM-301

- Pattern: Uni-directional
- Frequency Response: 40~18KHz
- Sensitivity: -54dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A6

FOR PG48

- Pattern: Uni-directional
- Frequency Response: 50~ 15KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-6

VOICE COIL

- for DM-116 and DM-116D



CD-A9

FOR DM-18K

- Pattern: Uni-directional
- Frequency Response: 40~15KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A10

FOR DM-PG58

- Pattern: Uni-directional
- Frequency Response: 50~18KHz
- Sensitivity: -55dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A11

FOR DM-605

- Pattern: Uni-directional
- Frequency Response: 50~16KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A12

FOR DM-212

- Pattern: Uni-directional
- Frequency Response: 50~14KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A13

FOR SM-28

- Pattern: Uni-directional
- Frequency Response: 40~18KHz
- Sensitivity: -53dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A8H

FOR DM-38

- Pattern: Uni-directional
- Frequency Response: 50~18KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-A8L

FOR GW-6002

- Pattern: Uni-directional
- Frequency Response: 50~18KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-B1

FOR GW-901, GW-7011, GW-6002

- Pattern: Uni-directional
- Frequency Response: 50~18KHz
- Sensitivity: -56dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-B2

FOR GW-4004

- Pattern: Uni-directional
- Frequency Response: 40~19KHz
- Sensitivity: -52dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%



CD-B3

MICROPHONE VOICE COIL

- Pattern: Uni-directional
- Frequency Response: 40~19KHz
- Sensitivity: -52dB \pm 3dB
- Output Impedance: 600 Ω \pm 10%

Disco Light

STROBE LIGHTS / LEDS



ZYP-31

LED PIN SPOT LIGHT

- Voltage/frequency: AC 110V/60Hz
- Lighting source: 3W LED x 1 LED bulb (white)
- Power consumption: 5W
- Operating environment: indoor use
- Suitable for mirror balls



ZYP-118

LED STAGE LIGHT

- Light source: 18 x 1W / 6 x RGB
- Source lifetime: rated 50,000 hours
- Power supply: 100-240V/50-60Hz
- Power rating: 24W
- Play mode: Auto/Sound/DMX Master-slave
- DMX channel: 7
- Dimensions: 7.5" x 5.5" x 7.5" (190 x 140 x 190mm)
- Gross weight: 2.03lbs (0.92Kg)

ZYP-543

LED STAGE LIGHT

- Light Source: 54x3W
- Source Lifetime: Rated 50000 hours
- Power Supply: 100~240V, 50~60Hz
- Power Rating: 180W
- Play mode: Auto/Sound/DMX Master-Slave
- DMX Channel: 8
- Dimensions: 10" x 10" x 14.4" (255x255x295mm)
- Gross Weight: 6.2 lbs (2.8Kgs)



ZYF4-5192

LED FOUR EYES LIGHT

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 20W
- Lighting source: 5mm LED x 192 pcs
- Control mode: DMX 512, music, automatic, master/slave.



ZYF-S54


LED SHELL LAMP

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 30W
- Lighting source: 5W LED x 4 LED bulbs (red, green, blue, white)
- Control channel: 8CH
- Control mode: DMX 512, music, automatic, m/slave
- Operating environment: indoor use

ZYLB-10252-28

LED STAGE LIGHT

- Voltage/frequency: 100-240V/50-60Hz
- Lighting source: 252 LED/84 x RGB
- LED section: 4 sections
- Power consumption: 28W
- Control mode: automatic, sound, DMX, master-slave
- DMX channel: 7
- Light angle: 30°
- Effect: color-mixing wash wall effect
- Dimensions: 39.8" x 2.4" x 2.4" (1010 x 60 x 60mm)
- Gross weight: 5.51Lbs (2.5Kg)
- Standard configuration: power cable

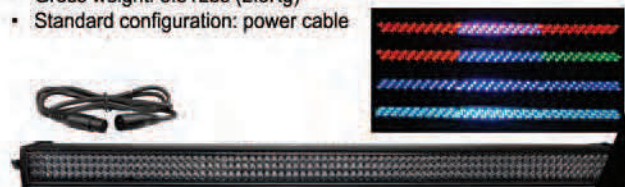

Disco Light

STROBE LIGHTS / COLORFUL STROBES



ZYP-147RGB-D

LED CHARGER COLOR KING


- Voltage: AC 100-110V, 220-240V
- Power consumption: 30W
- Lighting source: 10mm diodes, 147 LED bulbs (red, green, blue)
- Control mode: DMX 512
- Operating environment: indoor use



ZYST-562L-BL

LED COLORFUL STROBE

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 8W
- Lighting source: 5mm LED diodes, 62 LED bulbs
- Control mode: sound control
- Operating environment: indoor use
- BLUE color.

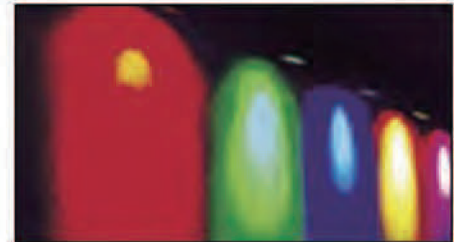

ZYST-562L-GR

LED COLORFUL STROBE

- Voltage/frequency:
AC 110V/60Hz
- Power consumption: 8W
- Lighting source: 5mm LED diodes, 62 LED bulbs
- Control mode: sound control
- Operating environment:
Indoor use
- GREEN color.



ZYST-562L-RD

LED COLORFUL STROBE

- Voltage/frequency:
AC 110V/60Hz
- Power consumption: 8W
- Lighting source: 5mm LED diodes, 62 LED bulbs
- Control mode: sound control
- Operating environment:
Indoor use
- RED color.



ZYST-562L-WH

LED COLORFUL STROBE

- Voltage/frequency:
AC 110V/60Hz
- Power consumption: 8W
- Lighting source: 5mm LED diodes, 62 LED bulbs
- Control mode: sound control
- Operating environment:
Indoor use
- WHITE color.




ZYST-562L-YL

LED COLORFUL STROBE

- Voltage/frequency:
AC 110V/60Hz
- Power consumption: 8W
- Lighting source: 5mm LED diodes, 62 LED bulbs
- Control mode: sound control
- Operating environment:
Indoor use
- YELLOW color.

Disco Light


STROBE LIGHTS / COLORFUL STROBES

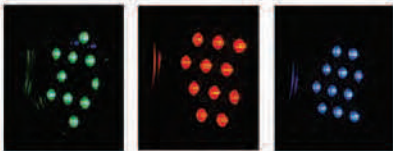

ZYP-336

LED PINSPOUT LIGHT

- Voltage: AC 110V/ 60Hz
- Lighting Source: 3W LED x 1 PC (White)
- Power Consumption: 5W
- Suitable for Mirror Balls
- Operating Environment: Indoor Use



ZYST-118

18 PCS LED STROBE LIGHT


- Voltage: 110V/60Hz
- Power Consumption: 18W
- Lighting Source: 18PCSx1W(R,G,B) LED
- Control Mode: Automatic, Sound Activated
- Sensitivity Adjustable
- Working Environment: Indoor use



ZYST-524L

LED MINI STROBE LIGHT

- Voltage: 110V/220V ,
- Frequency: 50-60Hz
- Power Consumption: 5W,
- Lamp: 5mm LED diodes, 24 pcs
- Brightness adjustable model or sound controlled model.
- Size: 160x160x180mm Weight: 0.55KG



ZYSP-13BL

ZYSP-13GR


ZYSP-13RD

ZYSP-13WH

ZYSP-13YW

LED RAIN LIGHT BLUE COLOR

- Voltage: AC 110V/60Hz
- Power : 6V5W
- Lighting Source: 1 x 3W High Brightness LED
- Basic Colors: RED, GREEN, BLUE, YELLOW, WHITE
- Control Mode: Dimming Desk



Disco Light

LED LIGHTS



ZYB-32

LED MINI COLOR BALL

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 10W
- Lighting source: 10mm LED diodes, 39 LED bulbs (red, green, blue, white)
- Motor: 220V 5rpm
- Control mode: automatic
- Operating environment: indoor use



ZYB-34

LED LASER TWIN BALL

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 20W
- Lighting source: 10mm LED diodes, 72 LED bulbs (red, green, blue)
- Motor: 12V 26rpm
- Control mode: automatic
- Operating environment: indoor use



ZYB-36UB

LED CRYSTAL BALL WITH MUSIC PLAYER WITH BUILT IN SPEAKER

- Light Source: 6 x 3W RGB LED
- Source Lifetime Rated 18000 Hours
- 2-Way Rotation
- Built-in Speaker
- Power Supply: 110V/50Hz
- Power Rating: 25W
- Operating Mode: Auto/Sound/BT
- SD card input and USB port for sound controlled operation



ZYB-21072

LED LASER TWIN BALL

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 20W
- Lighting source: 10mm LED diodes, 72 LED bulbs (red, green, blue)
- Motor: 12V 26rpm
- Control mode: automatic
- Operating environment: indoor use



ZYMh-78

MINI MOVING HEAD

- Light Source: 7x8W, 4-in-1 RGBW
- Power Supply: 100-240V AC, 50/60Hz
- Rated Power: 100W
- Control Mode: Sound/Auto/DMX/Master-Slave
- DMX Channel: 9/14
- Scanning Angle: Pan: 540°, Til: 270°
- Widely used in small stage, KYV, Bar, Disco Bar, Home Party, Wedding Party, Entertainment Show, etc.
- Dimension: 6.9" x 6.9" x 9.3" (175 x 175 x 235mm)
- Weight: 6 lbs (2.7 Kg)

Disco Light

LED LIGHTS



RED: 1W/3W 24pcs
GREEN: 1W/3W 28pcs
BLUE: 1W/3W 28pcs
WHITE: 1W/3W 28pcs

ZYMH-3108

LED MOVING HEAD LIGHT

- Rated voltage: AC100V-240V, 50/60HZ
- Power Rating: 150AV/350AV
- Channel: 12 standard DMX512 control channel
- Lamp: High-power lamp which is import from foreign country
- Standard of the switch power: AC Output: DC 28V
Current Output: 6A/13A
- Standard of the fan: volume: 90*90*25-60960*25-DC120V/0.12A
- Standard of the fuse: the fuse of the bottom:
3.15A/250V-5A/250V 5*20MM
- Size: 425mm-295mm-400mm
- Lamp: RED: 1W/3W 24pcs
GREEN: 1W/3W 28pcs
BLUE: 1W/3W 28pcs
WHITE: 1W/3W 28pcs



ZYMHM-524

LED MINI BABY SPOT LIGHT

- Rated Voltage: AC 110V
- Rated Frequency: 60Hz
- Power Consumption: 30W
- Control Mode: LCD display, DMX 512,
- sound activated, automatic, master/slave



ZYF-554

LED SMALL MUSHROOM LAMP

- Voltage: AC 110V/220V
- Frequency: 50Hz -60Hz
- Power: 50w
- Diodes Quantity: 4 pcs diodes(9W RGB LED)
- Channels: 4 Channels ,
- Control signal: Standard DMX-512 signal



ZYF-5122

LED MUSHROOM LAMP

- Voltage/frequency: AC 110V/220V
- Frequency: 50-60Hz
- Power consumption: 30W
- Lighting source: 5mm LED diodes,
122 LED bulbs (red, green, blue)
- Control channel: 4CH
- Control mode: DMX 512, music,
automatic, master/slave
- Operating environment: indoor use

Disco Light


LED LIGHTS



ZYX-9402RGB

LED COLORFUL BEAM LIGHT

- Voltage/frequency: AC 110-220V/50-60Hz
- Power consumption: 50W
- Lighting source: 9W LED x 4 LED bulbs (red, green, blue)
- Control channel: 4CH
- Control mode: DMX 512, music, automatic, master/slave
- Operating environment: indoor use

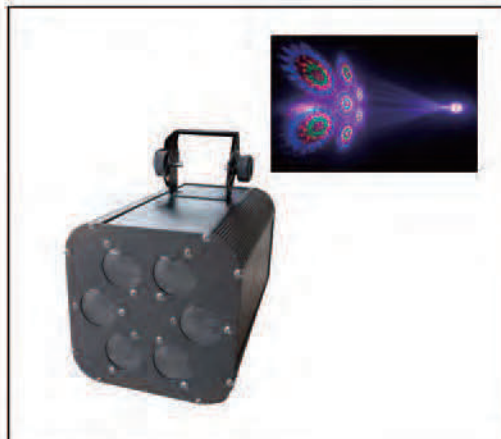

ZYX-9403RGB

LED GLAMOROUS LIGHT

- Voltage/frequency: AC 110V/60 Hz
- Power consumption: 50W
- Lighting source: 9W LED x 4 LED bulbs (red, green, blue)
- Control channel: DMX 512, music, automatic, master/slave
- Operating environment: indoor use



ZYX-9405RGB

LED MUSHROOM LIGHT

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 50W
- Lighting source: 9W LED x 4 LED bulbs (red, green, blue)
- Control channel: 4CH
- Control mode: DMX 512, music, automatic, master/slave
- Operating environment: indoor use



ZYX-9408RGB

LED MUSHROOM LIGHT

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 50W
- Lighting source: 9W LED x 4 LED bulbs (red, green, blue)
- Control channel: 4CH
- Control mode: DMX 512, music, automatic, master/slave
- Operating environment: indoor use

Disco Light

LED LIGHTS / LASERS

NL-DL03LED

3 IN 1 DISCO LIGHT

- Disco Light 3 in 1
- Lights are detachable
- Dimmer control for music and speed of light LED
- Indoor use only
- 110V



NL-DL06LED

6 IN 1 DISCO LIGHT

- Disco Light 6 in 1
- Lights are detachable
- 282PCS
- Dimmer control for music and speed of light LED
- Indoor use only
- 110V-60Hz



ZYLB-10260

LED CHARGE COLOR

- Voltage/Frequency: 110V-240V 50-60Hz
- Power Consumption: 50W , Fuse: 3A
- LED: 260PCS intensive brightness LED Work Life: Over 100,000 hours , Basic Color: Red, Green, Blue



ZYLB-5198

LED DIMMER STROBE LIGHT

- Voltage: AC220V-240V
- Frequency: 50Hz
- Power consumption: 30W
- Channels: 4 Channels
- Control signal: Standard DMX-512 signal
- Function Model: DMX-512 controlled



ZYL-114RG

LASER KALEIDOSCOPE

- Kaleidoscope of various patterns
- True colorful patterns such as bubbles, flowers, flying butterflies and many more
- Patterns move to the beat alternating between red and green
- Colorful patterns display in accordance with music
- Sound/auto control
- Laser Power:
Red: 100mW, Green: 25-45mW
- Input Power: DC 5V, 1A
- Dimension: 5.1" x 6.3" x 2.6"
(130x160x65mm)
- Weight: 2lb (0.9Kg)

Disco Light

LASERS



ZYL-AM202BL

LASER DISPLAY SYSTEM

- Laser diode: blue
- Laser supply: AC 100-240V, 50Hz
- Laser power: 500mW 445nm
- Scanner angle: $\pm 15^\circ$
- Dimensions: 250 x 236 x 146mm
- Net/gross weight: 2.9/3.1kg
- Control mode: sound, automatic, DMX control, PC software.
- Peculiarity: running under the mode of DMX, audio and auto.
- Effect: displays animation patterns by the following motions: blanking, zoom (horizontal, vertical or graphic's movement along the two directions by in phase or asynchronous), offset, rotate, wave, dot-line mode, strobe.



ZYL-252BLUE

DOUBLE HEAD BLUE LASER

- Laser diode: blue
- Laser supply: AC 100-240V
- Laser power: 400-550mW
- Scanner angle: $\pm 1^\circ$
- Control mode: DMX 512, sound, automatic
- Dimensions: 308 x 210 x 160mm
- Net/gross weight: 2.5/2.7kg
- Effect: displays more than 50 light beams and patterns, displaying laser patterns specified by international laser display association, rotating color fan, time and space tunnel and fairy flowers (can be programmed with customers)



ZYL-AM102GR

LASER DISPLAY SYSTEM

- Laser diode: green
- Laser supply: AC 100-240V, 50/60Hz
- Laser power: 90-120mW 532nm
- Scanner angle: $\pm 30^\circ$
- Dimensions: 236 x 218 x 137.3mm
- Net/gross weight: 3.0/3.2kg
- Control mode: sound, automatic, single pattern by DMX control
- Peculiarity: running under the mode of DMX, audio and auto
- Effect: displays animation patterns by the following motions: blanking, zoom (horizontal, vertical or graphic's movement along the two directions by in phase or asynchronous), offset, rotate, wave, dot-line mode, strobe.



ZYL-300R

LASER STAGE LIGHT

- Power Supply: 100-240V AC, 50/60Hz
- Laser power: Red > 300mW,
- Scanner Angle: $\pm 18^\circ$
- Dimensions: 7.4" x 6.9" x 4.7" (187 x 176 x 120mm)
- Weight: 2.65Lbs (1.2Kg)
- Sound/Auto control
- Can project more than 100 different laser beams and different patterns like: a wide single red laser beam, rotating color fan, space tunnel and many more.
- Different patterns can continuously strobe or rotate
- Suitable for Bars, Performing Arts, KTV, Disco hall

Disco Light

LASERS / LEDS / FOG MACHINES

ZYL-101

MINI LASER STAGE LIGHT

- Projects over 5000 Laser Beams and motion effects
- Boundless fireflies are projected as stars in the sky
- Widely used in Family Parties, suitable for toy and unique gift etc.
- Sound/Auto/Strobe control
- Speed/Sensitivity Adjustable
- Laser Power: Red \geq 60mV, Green \geq 8mV
- Input Power: DC 5V, 1A
- Dimension: 4.7" x 3.7" x 1.9" (120x94.5x49mm)
- Weight: 0.77lb (0.35Kg)



ZYL-103

MINI LASER STAGE LIGHT

- Projects over 20 holiday emotions, Like: Snow Man, Flowers, Christmas Trees, Smiling Faces, Cupids Arrow and Several more
- Widely used in Restaurant, Hotel, Shop, Hall, Bar & Family Parties
- Sound/Auto/Strobe control, the external potentiometer can adjust grating rotation speed
- Scanner angle: $\pm 45^\circ$
- Laser Power: Red \geq 50mV, Green \geq 20mV
- Input Power: DC 5V, 1A
- Dimension: 5.1" x 3.6" x 2" (130x92x51mm)
- Weight: 0.88lb (0.4Kg)



ZYP-154

LED STAGE LIGHT

- Voltage: AC100-240V, 50-60Hz
- Power consumption: 120W
- Light source: 54 x 1W high brightness RGBW LEDS (R12, G18, B18, W6)
- Lamp life: 6-10 ten thousand hours
- Color: 16.7 million kinds of color mixing
- Control mode: DMX512, master/slave, auto, sound activated
- Control channels: 8CH
- Weight: 3.3Lbs (1.5KG)
- Dimensions: 8.7" x 8.7" x 9.1" (220 x 220 x 230mm)
- ABS plastic



ZSM-403SLED

400W LED FOG MACHINE

- Voltage: 110V, 50Hz
- LED Color: 3PCs 1W RGB 3 in 1
- Power Consumption: 400W
- Heat-Up time: 5 Minutes
- Tank Capacity: 0.3L
- Projection Distance: 3.5M
- Smoke Output: 14M³ / Min
- Control Mode: Wired Remote Control
- Weight: 1.8Kg
- Dimensions: 290x150x140mm



Disco Light

FOG MACHINES



ZSM-400ST

SMOKE MACHINE

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 400W
- Control mode: remote control
- Warm-up time: 7 min



ZSM900ST

SMOKE MACHINE

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 900W
- Tank capacity: 1.5L
- Control mode: Wire control, remote control



ZSM1500U DMX

UP-SHOOTING SMOKE MACHINE

- Voltage/frequency: AC 110V/60Hz
- Power consumption: 1500W
- Control mode: wire control, remote control, DMX
- Tank capacity: 2L
- Approx. smoke projection: 12 meters
- Approx. smoke output: 2,000 cubic ft./min
- Warm-up time: 10 min



ZSM1500ST

SMOKE MACHINE

- Voltage/frequency: AC 110-220V/50-60Hz
- Power consumption: 1500W
- Control mode: wire control, remote control
- Tank capacity: 2L
- Approx. smoke projection: 12 meters
- Approx. smoke output: 2,000 cubic ft./min
- Warm-up time: 10 min



Disco Light

FLUIDS

TB-100

BUBBLE FLUID

- Compatible with water-based machines.
- 1 gallon (3.785L)



TF-25

FOG FLUID

- Compatible with water-based machines.
- 1 quart (946L)



TF-100

FOG FLUID

- Compatible with water-based machines.
- 1 gallon (3.785L)



TFS-2OZ-LM

FLUID SCENT

- Lime mint.
- 2 fl. oz. (60mL)



TFS-2OZ-MM

FLUID SCENT

- Mojito mint.
- 2 fl. oz. (60mL)



TFS-2OZ-PM

FLUID SCENT

- Pepper mint.
- 2 fl. oz. (60mL)



Disco Light

STROBE / MIRROR BALL / MOTOR



GTS-1200 (BULB)
GTS-1200LED (LED)
LED STROBE LIGHT
• 110V



B-1200
XENON REPLACEMENT
BULB for GTS-1200



GTS-1300 (BULB)
GTS-1300LED (LED)
20 WATT STROBE LIGHT
• Adjustable speed hanging bracket
• 110V



ZMB-12 (12" Mirror Ball)

ZMB-16 (16" Mirror Ball)

ZMB-20 (20" Mirror Ball)

SINGLE COLOR MIRROR BALL WITH MOTOR

- Polyfoam inner ball
- ABS center core
- Available in 12", 16", 20"



ZMB-CL 12 (12" Mirror Ball)

ZMB-CL 16 (16" Mirror Ball)

ZMB-CL 20 (20" Mirror Ball)

MIRROR BALL WITH MOTOR

- Polyfoam inner ball
- ABS center core
- Multi-color (red, blue, golden yellow)
- Available in 12", 16", 20"



ZMR-3MTR

MIRROR BALL MOTOR

- Power: 110-120V, 50/60Hz, 4W
- Motor speed: 2.5-3 RPM
- Fits up to 12" & 16"



Disco Light

MIRROR BALLS / MOTORS

TLS-150

DISCO LIGHT STAND

- Min. height: 1.5m
- Max. height: 3.6m
- Weight: 3.3 kg (7 lbs)



TLS-275

DISCO LIGHT STAND


- Min. height: 1.5m
- Max. height: 6.6m
- Weight: 5 kg (11 lbs)



TLS-350

PORTABLE TRUSS SYSTEM

- Min. height: 1.7m
- Max. height: 3m
- Weight: 1.9 kg (4 lbs)

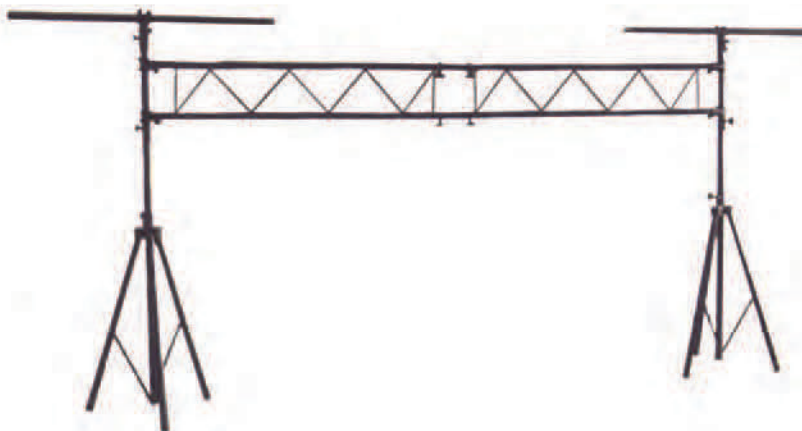

ZY-CL3548-80K

DISCO LIGHT CLAMP


- Diameter: 35mm to 48mm
- Supports up to 80kg (176 lbs)



ZY-CL4252-100K

DISCO LIGHT CLAMP

- Diameter: 42mm to 52mm
- Supports up to 200kg (440 lbs)

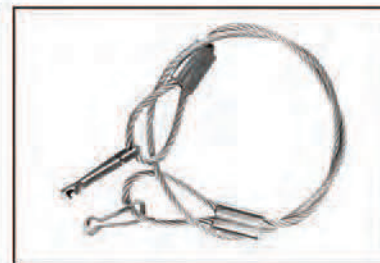

ZYC-WIRE

LIGHTING SAFETY WIRE.

- Secures lighting effects to rigging.
- Professionally finished with eyeleted hook and loop, covered cable ends.
- Silver finish.

Disco Light

POWER ACCESSORIES



ZEZ-8008

8 CHANNEL ON/OFF DISCO LIGHT CONTROL

- Switching Pack
- Connector Cable
- 8 Channels with ON/OFF Control
- Flash ON/OFF Button for each channel
- Switch Pack features eight 3-prong Switching plugs and 1 uninterrupted Power plug
- Super-Sized momentary switches
- Larger ON/OFF Button
- Input Voltage: 110V 60Hz
- Rated Power: 30W
- ON/OFF Fuse: 3A
- Plug Fuse: 15A



ZYC-DMX512

PROFESSIONAL LIGHTING DMX CONTROLLER

- Voltage: AC110V/60Hz
- Electric Current: No Less Than 300mA
- Power Consumption: 5W
- External Power Transformer
- Fast Programming, Memorizes the program, LCD Display, easy Operation
- Standard DMX 512 signal
- MID: IN/OUT, Built-IN Mic Input
- This controller has 8 outlets /192 DMX 512 Channels
Output it can control up to 12 moving Lights
(EACH Outlets has 16 Channels)



ZPC-8000

RACK MOUNT POWER STRIP

- Voltage: 110V/60Hz
- Includes 8 Outlets
- Offers 15 Amp AC Power Distribution
- Rack Mountable Using 1 Rack Space (1U)

POWER PRODUCTS

RECHARGEABLE BATTERIES



4 AMPS - 6 VOLTS

RB4-6

- Nominal Voltage (V): 6
- Nominal Capacity (20H.R) (AH): 4.5
- Length:(in)2.76 (mm)70 • Width:(in)1.89 (mm)48
- Height:(in)3.98 (mm)101 • With Terminal: (in)4.21 (mm)107
- Weight: (Lbs) 1.63 (kgs) 0.74



7 AMPS - 12 VOLTS

RB7-12

- Nominal Voltage (V): 12
- Nominal Capacity (20H.R) (AH): 7
- Length:(in)5.95 (mm)151 • Width:(in)2.56 (mm)65
- Height:(in)3.7 (mm)94 • With Terminal: (in)3.94 (mm)100
- Weight: (Lbs) 4.96 (kgs)2.25



8 AMPS - 6 VOLTS

RB8-6

- Nominal Voltage (V): 6
- Nominal Capacity (20H.R) (AH): 8
- Length:(in)5.95 (mm)151 • Width:(in)1.97 (mm)50
- Height:(in)3.7 (mm)94 • With Terminal: (in)3.94 (mm)100
- Weight: (Lbs) 3.41 (kgs) 1.55



9 AMPS - 12 VOLTS

RB9-12 (Replacement for ER-770)

- Nominal Voltage (V): 12
- Nominal Capacity (20H.R) (AH): 9
- Length:(in)5.95 (mm)151 • Width:(in)2.56 (mm)65
- Height:(in)3.7 (mm)94 • With Terminal: (in)3.94 (mm)100
- Weight: (Lbs) 5.3 (kgs)2.40



10 AMPS - 6 VOLTS

RB10-6

- Nominal Voltage (V): 6
- Nominal Capacity (20H.R) (AH): 10
- Length:(in)5.95 (mm)151 • Width:(in)1.97 (mm)50
- Height:(in)3.7 (mm)94 • With Terminal: (in)3.94 (mm)100
- Weight: (Lbs) 4.17 (kgs)1.89



10 AMPS - 12 VOLTS

RB10-12

- Nominal Voltage (V): 12
- Nominal Capacity (20H.R) (AH): 10
- Length:(in)5.95 (mm)151 • Width:(in)3.9 (mm)99
- Height:(in)3.74 (mm)95 • With Terminal: (in)3.97 (mm)101
- Weight: (Lbs) 8.6 (kgs)3.9



12 AMPS - 12 VOLTS

RB12-12

- Nominal Voltage (V): 12
- Nominal Capacity (20H.R) (AH): 12
- Length:(in)5.95 (mm)151 • Width:(in)3.9 (mm)99
- Height:(in)3.74 (mm)95 • With Terminal: (in)3.97 (mm)101
- Weight: (Lbs) 8.6 (kgs)3.9



17 AMPS - 12 VOLTS

RB17-12

- Nominal Voltage (V): 12
- Nominal Capacity (20H.R) (AH): 17
- Length:(in)7.13 (mm)181 • Width:(in)2.99 (mm)76
- Height:(in)6.57 (mm)167 • With Terminal: (in)6.57 (mm)167
- Weight: (Lbs) 14.32 (kgs)6.5

POWER PRODUCTS

BATTERIES



RB 1-9

REPLACEMENT 9V

- Rechargeable battery for ER-3700
- AC 110-220V

1 AMPS - 9 VOLTS



RB6-2.8

SEALED LEAD-ACID RECHARGEABLE BATTERY

2.8 AMPS - 6 VOLTS



RB-670B

SEALED LEAD-ACID RECHARGEABLE BATTERY

- 6V
- 7.0 Ah
- Cycle use: 7.20V - 7.50V
- Standby use: 6.75V - 6.90V
- Max charging current: 2.10A

7 AMPS - 6 VOLTS



RB4-1

RECHARGEABLE BATTERY

- 4V, 1.0Ah
- Cycle use: 4.80V-5.00V
- Standby use: 4.50V-4.60V
- Max. charging current: 0.27A

7 AMPS - 4 VOLTS



RB4-3

RECHARGEABLE BATTERY

- 4V, 3.0Ah
- Cycle use: 4.80V-5.00V
- Standby use: 4.50V-4.60V
- Max. charging current: 0.90A

3 AMPS - 4 VOLTS



RB4-12

RECHARGEABLE BATTERY

- 4 Amp 12 Volt

4 AMPS - 12 VOLTS

POWER PRODUCTS

BATTERIES



RB4.5-12

FOR STAND-BY USE: Charging Voltage:
6V (6.8-6.9) 12V (13.6-13.7)

FOR CYCLE USE: Charging Voltage:
6V (7.3-7.5) 12V (14.6-15.0)

• Charging Current (A): 0.1C-0.25C

• "C" means Ah value of battery rated capacity

4.5 AMPS - **12** VOLTS



RB40-12

RECHARGEABLE BATTERY

• 40 Amp 12 Volt

40 AMPS - **12** VOLTS



RB65-12

RECHARGEABLE BATTERY

• Maintenance - Free

• 12V - 65Ah

65 AMPS - **12** VOLTS



ER-471-RB

REPLACEMENT BATTERY

• for ER-471

2 AMPS - **6** VOLTS



ER-771-RB

REPLACEMENT BATTERY

• for ER-771

2 AMPS - **12** VOLTS



ER-991-RB

REPLACEMENT BATTERY

• for ER-991

2 AMPS - **12** VOLTS

POWER PRODUCTS

VOLTAGE REGULATORS

AR-UV

UV METER

- For all Nippon America voltage regulators



AR-500 (500 Watts)

AR-1000 (1000 Watts)

AR-2000 (2000 Watts)

AR-3000 (3000 Watts)

AR-5000 (5000 Watts)

VOLTAGE REGULATOR

- Input: 180-260V, 75-130V
- Output: 110V/220V
- Phase: single
- Frequency: 50/60Hz



AVRAI-2000C

2KVA AUTOMATIC VOLTAGE REGULATOR

- Toroidal type transformer
- Wide input voltage range: 80-260V
- Dual output: 110V AC and 220V AC at the same time
- Advanced CPU control circuit
- Automatic 10 second countdown delay function integrate
- Full protection design: high voltage/low voltage/high temperature/short circuit
- Accurate output regulation: $\pm 8\%$

AVRAI-5000C

5KVA AUTOMATIC VOLTAGE REGULATOR

- Toroidal type transformer
- Wide input voltage range: 80-260V
- Dual output: 110V AC and 220V AC at the same time
- Advanced CPU control circuit
- Automatic 10 second countdown delay function integrate
- Full protection design: high voltage/low voltage/high temperature/short circuit
- Accurate output regulation: $\pm 8\%$



POWER PRODUCTS


AUTOMATIC VOLTAGE REGULATORS



ASERV-1000C

1KVA AUTOMATIC VOLTAGE REGULATOR


- Servo motor transformer
- Wide input voltage range: 80-260V
- Dual output: 110V AC and 220V AC at the same time
- Advanced CPU control circuit
- Automatic 10 second countdown delay function integrate
- Full protection design: high voltage/low voltage/high temperature/short circuit
- Accurate output regulation: $\pm 3\%$

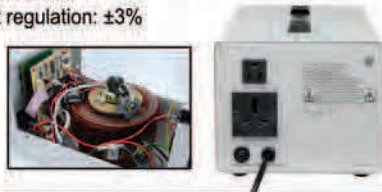

ASERV-2000C

2KVA AUTOMATIC VOLTAGE REGULATOR

- Servo motor transformer
- Wide input voltage range: 80-260V
- Dual output: 110V AC and 220V AC at the same time
- Advanced CPU control circuit
- Automatic 10 second countdown delay function integrate
- Full protection design: high voltage/low voltage/high temperature/short circuit
- Accurate output regulation: $\pm 3\%$

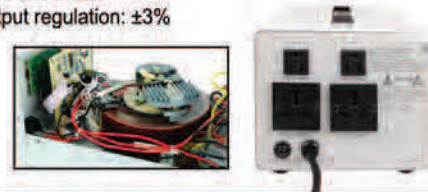

ASERV-3000C

3KVA AUTOMATIC VOLTAGE REGULATOR

- Servo motor transformer
- Wide input voltage range: 80-260V
- Dual output: 110V AC and 220V AC at the same time
- Advanced CPU control circuit
- Automatic 10 second countdown delay function integrate
- Full protection design: high voltage/low voltage/high temperature/short circuit
- Accurate output regulation: $\pm 3\%$



ASERV-5000C

5KVA AUTOMATIC VOLTAGE REGULATOR

- Servo motor transformer
- Wide input voltage range: 80-260V
- Dual output: 110V AC and 220V AC at the same time
- Advanced CPU control circuit
- Automatic 10 second countdown delay function integrate
- Full protection design: high voltage/low voltage/high temperature/short circuit
- Accurate output regulation: $\pm 3\%$



POWER PRODUCTS

DC POWER SUPPLY / AUTOMATIC VOLTAGE REGULATORS



DPWS-3012DS

30 AMP DC SWITCHING POWER SUPPLY

- Input voltage: 110AC, 60Hz
- Output voltage: 13.8VDC, adjusts voltage between 9.0V and 15.0V
- Output voltage regulation: <2%
- Protection: short-circuit, automatic current limiting over 30A
- Output current: 30A (max) 20A (continuous)
- Fuse: 8A
- Meter: output voltage and current, back-lit
- Dimensions: 155 x 70 x 205mm
- Weight: approx. 1.5Kg



DPWS-5012DS

50 AMP DC SWITCHING POWER SUPPLY

- Input voltage: 110AC, 60Hz
- Output voltage: 9.15VDC regulated or 13.8V DC
- Output voltage regulation: <2%
- Protection: short-circuit, automatic current limiting over 50A
- Output current: 50A (max) 38A (continuous)
- Fuse: 8A
- Meter: single volt/current meter, back-lit
- Dimensions: 195 x 85 x 280mm
- Weight: approx. 1.5Kg



ATVR-500 (500 VA)

ATVR-1000 (1000 VA)

ATVR-2000 (2000 VA)

VOLTAGE REGULATOR

- Input: 80-140V/120-240V
- Output: 110/220V
- Frequency: 50-60Hz
- Delay function



ATVR-5000 (5000 VA)

ATVR-8000 (8000 VA)

ATVR-10000 (10000 VA)

VOLTAGE REGULATOR

- Input: 80-140V/120-240V
- Output: 110V/220V
- Frequency: 50/60Hz
- Delay function

POWER PRODUCTS

DC REGULATED POWER



DSPS-5012V

50 AMP DC SWITCHING POWER SUPPLY

- Adjustable output voltage range: 5-15V DC
- Adjustable output current range: 10-50A DC
- Protection: short circuit, overload, internal over-temperature, surge, input under-voltage
- Output voltage regulation: <1%
- Efficiency: >85%
- Low ripple



DSPS-10012V

100 AMP DC SWITCHING POWER SUPPLY

- Output voltage range: 5-15V DC
- Output current range: 20-100A DC
- Protection: short circuit, overload, internal over-temperature, surge, input under-voltage
- Output voltage regulation: <1%
- Efficiency: >85%
- Low ripple



DVP-2712

DC POWER SUPPLY

- 25 amp, 27 amp surge
- Converts to 13.8V DC
- Low ripple
- Built-in surge protection



DVP-3212

DC POWER SUPPLY

- 30 amp, 32 amp surge
- Converts to 13.8V DC
- Low ripple
- Built-in surge protection



DVP-712 (110V)

DVP-220-712 (220V)

DC POWER SUPPLY

- 5 amp, 7 amp surge
- Converts to 13.8V DC
- Low ripple
- Built-in surge protection



DVP-512LJ (5 Amp, 7 Amp Surge)

DC POWER SUPPLY WITH LIGHTER JACK

- Converts to 13.8V DC
- Low ripple
- Built-in surge protection

POWER PRODUCTS

DC REGULATED POWER



DVP-512 (110V)

DVP-220-512 (220V)

- DC power supply
- 3 amp, 5 amp surge
- Converts to 13.8V DC
- Low ripple
- Built-in surge protection



DVP-515 (110V)

- 5 amp surge
- Converts to 1.5V-15V DC
- Low ripple
- Built-in surge protection
- Voltage adjustment switch



DVP-1212 (110V)

DVP-220-1212 (220V)

- 10 amp, 12 amp surge
- Converts to 13.8V DC
- Low ripple
- Built-in surge protection



DVP-2212 (110V)

DVP-220-2212 (220V)

- DC power supply
- 20 amp, 22 amp surge
- Converts to 13.8V DC
- Low ripple
- Built-in surge protection

DVP-305VR

VARIABLE DC POWER SUPPLY

- Applicable for school, small hobbyist, laboratory, repair center and more
- Provides a circuit overload protection, reverse polarity protection and short circuit protection
- PCB construction by SMD adhesive sheet element technology, highly reliable
- Fine and coarse adjustment of regulated current and voltage values from 0-30V and 0-5A for multiple uses
- Auto cooling fan turns on when temperature reaches 50°C (115°F)
- All metal construction and compact design, features elegant appearance and power saving
- Power: 150W
- Display: 3 digits green LED x 2 Set
- Display error of current: $\pm 1.0\%$ + 2 digits
- Constant Voltage: Output Voltage: 0-30V Line regulation: 0.01%+3mV Load regulation: 0.01%+5mV Ripple voltage: 1.0mV (RMS)
- Constant Current: Output current: 0-5A Line regulation: 0.2%+3mA Load regulation: 0.2%+3mA Ripple current: 3.0mA (RMS)
- Input Voltage: AC 110V $\pm 10\%$, 60Hz
- Weight: 11.7 lbs (5.3Kg)
- Dimensions: 11" x 5.4" x 6.3" (280 x 136 x 160mm)



DV-337CL

- AC/DC adapter with lighter jack
- Input: 110V AC
- Output: 12V, 1A DC
- Compact style
- Wall mount

POWER PRODUCTS

STEP UP & DOWN TRANSFORMER



TUD-100 (100 Watts)

TUD-200 (200 Watts)

TUD-300 (300 Watts)

TUD-500 (500 Watts)

TUD-1000 (1000 Watts)

TUD-1500 (1500 Watts)

TUD-2000 (2000 Watts)

TRANSFORMER

- One socket
- Carrying handle
- 2 adapter plug
- With input voltage selector (110V/220V)
- No grounding
- Removable heads for safety, in order to eliminate a live wire.



TUD-3000 (3000 Watts)

TUD-5000 (5000 Watts)

TRANSFORMER

- Two socket
- With double power cord
- Carrying handle
- No grounding
- Removable heads for safety, in order to eliminate a live wire.

This series of step up/down voltage transformers offer you a safe, reliable, affordable, and convenient solution to converting voltages from 110/120 volts up to 220/240 volts or from 220/240 volts down to 110/120 volts for both home use and industrial applications.



TVS-100 (100 Watts)

TVS-200 (200 Watts)

TVS-300 (300 Watts)

TVS-500 (500 Watts)

TRANSFORMER

- One socket
- Carrying handle
- With three-prong plugs
- With input voltage selector (110V/220V)
- Two free spare fuses
- With grounding
- IEC socket for grounded connection and elimination of live wire.

TVS-1000 (1000 Watts)

TVS-1500 (1500 Watts)

TVS-2000 (2000 Watts)



TVS-3000 (3000 Watts)

TVS-5000 (5000 Watts)

TRANSFORMER

- Two socket
- With double power cord
- Carrying handle
- With grounding
- IEC socket for grounded connection and elimination of live wire.

POWER PRODUCTS

STEP UP & DOWN TRANSFORMER / VOLTAGE CONVERTERS



TUD-10000 (10,000 WATTS)

- STEP UP & DOWN TRANSFORMER
- 10000 step up and down transformer
 - Two socket
 - With double power cord
 - Carrying handle
 - With grounding



TVS-10000 (10,000 WATTS)

- STEP UP & DOWN TRANSFORMER
- 10000 step up and down transformer
 - Two socket
 - With double power cord
 - Carrying handle
 - With grounding



TC-AC-100

REPLACEMENT AC CORD FOR
NIPPON AMERICA TRANSFORMERS



TC-50D

VOLTAGE CONVERTER

- 50W
- Step down 220v / 240v to 110v/120v



TC-50U

VOLTAGE CONVERTER

- Steps up 110V/120V to 220V/240V
- 50W



TC-70D

VOLTAGE CONVERTER "DELUXE"

- Steps down 220V to 110V
- 50W




TC-90

INTERNATIONAL VOLTAGE CONVERTER

- Input: AC 110V/220V or 220V/240V
- Output: AC 220V/240V or 110V/220V
- 60W

POWER PRODUCTS

MATCHING TRANSFORMER & INVERTERS



LP-360 (16V, 120ma)

LP-421 (6-0-6V, 0.3A)

LP-423 (9-0-9V, 0.5A)

LP-426 (6-0-6V, 0.5A)

LP-427 (6-0-6V, 1A)

LP-428 (6-0-6V, 2A)

LP-430 (6-0-6V, 4A)

LP-433 (9-0-9V, 1A)

LP-435 (9-0-9V, 1.5A)

LP-437 (9-0-9V, 2A)

TRANSFORMERS

- Universal
- Center taps
- 110V/220V
- 9-0-9V, 2A



LP-520 (12-0-12V, 10A)

LP-570 (12-0-12V, 0.5A)

LP-573 (12-0-12V, 1A)

LP-575 (12-0-12V, 2A)

LP-577 (12-0-12V, 3A)

LP-580 (12-0-12V, 4A)

LINE MATCHING TRANSFORMER

- Universal
- Center taps
- 110V/220V
- 12-0-12V, 3A

LP-578

SPEAKER LINE TRANSFORMER

- 12-0-12V, 4A
- Universal
- Center taps
- 110/220V



PI-70U

POCKET SIZE AC/DC CAR INVERTER

- 70W continuous power with 140W peak
- Adjustable side connecting plate for the DC plug fits in different cigarette lighter
- 110V output receptacles
- Built-in thermal protection and overloading
- USB socket



USB
Power Port

POWER PRODUCTS

INVERTERS / VOLTAGE TRANSFORMERS

PI-200

HIGH PERFORMANCE
POWER INVERTER

- 200W continuous power with 400W peak
- Used in cars, trucks, RV's, boats, and aircrafts
- Ideal for emergency power outages due to storms and blackouts
- AC power outlet with ON/OFF switch
- Easy to read instructions manual enclosed



PI-400

CAR POWER INVERTER

- Power output: 400W continuous, 800W peak
- Used in cars, trucks, RV's, boats and aircrafts
- Ideal for emergency power outages due to storms and blackouts
- AC power outlet with ON/OFF switch
- Easy to read instructions manual enclosed



PI-800

CAR POWER INVERTER

- Power output: 800W continuous, 1600W peak
- Input voltage: DC 12V
- Output voltage: AC 110V
- Mobile power source for cars, SUV's, trucks, RV's and boats
- Ideal for emergency power failures



PI-1500

CAR POWER INVERTER

- Output Voltage Range: 110-125Volt AC RMS
- Input Voltage Range: 10.5-15 Volt DC
- No Load Current Draw: $\leq 1500\text{mA}$
- Max Continuous Power: 1500 Watts
- Surge Capability (Peak Power): 3000 Watt (0.3 second)
- Waveform: Modified Sine Wave
- AC Receptacle: Triple



DC12-2405

DC TO DC VOLTAGE TRANSFORMER

- Input voltage: DC 24V
- Output voltage: DC 12V
- Max. current: 5A
- Fuse: 5A



DC12-2415

DC TO DC VOLTAGE TRANSFORMER

- Input voltage: DC 24V
- Output voltage: DC 12V
- Max. current: 15A
- Fuse: 15A



DC12-2430

DC TO DC VOLTAGE TRANSFORMER

- Input voltage: DC 24V
- Output voltage: DC 12V
- Max. current: 30A
- Fuse: 30A



POWER PRODUCTS

DC REGULATED POWER

PI-DCDC-2412-10

24V DC TO 12V DC VOLTAGE CONVERTER

- Output Power: 10Amp(Continuous) 15 Amp Max
- Standby Current: \leq 0.02A
- Input Voltage: DC 20V~30V
- Output Voltage: DC 12V~13.8V
- Efficiency: >90%
- Cooling: By Air Convection
- Fuse: 10A x 1PC
- Dimensions(LxWxH):110x87x42mm
- Net Weight: 0.45Kg



PI-DCDC-2412-20

24V DC TO 12V DC VOLTAGE CONVERTER

- Output Power: 20Amp(Continuous) 30 Amp Max
- Standby Current: \leq 0.07A
- Input Voltage: DC 20V~30V
- Output Voltage: DC 12V~13.8V
- Efficiency: 85~90%
- Over Load: Circuit Protection
- Input Fuse: 20A
- Dimensions(LxWxH):182x115x62mm
- Net Weight: 0.8Kg



PI-DCDC-2412-30

24V DC TO 12V DC VOLTAGE CONVERTER

- Output Power: 30Amp(Continuous) 45 Amp Max
- Standby Current: \leq 0.08A
- Input Voltage: DC 20V~30V
- Output Voltage: DC 12V~13.8V
- Efficiency: 85~90%
- Over Load: Circuit Protection
- Input Fuse: 30A
- Dimensions(LxWxH):222x115x62mm
- Net Weight: 0.95Kg



PI-DCDC-2412-40

24V DC TO 12V DC VOLTAGE CONVERTER

- Output Power: 40Amp(Continuous) 60 Amp Max
- Standby Current: \leq 0.08A
- Input Voltage: DC 20V~30V
- Output Voltage: DC 12V~13.8V
- Efficiency: 85~90%
- Over Load: Circuit Protection
- Input Fuse: 40A
- Dimensions(LxWxH):222x115x62mm
- Net Weight: 1.0Kg



PI-DCDC2412-100

24V DC TO 12V DC VOLTAGE CONVERTER

- Output Power: 100Amp(Continuous), 130Amp Max
- Standby Current: \leq 1.10A
- Input Voltage: DC 20V~30V
- Output Voltage: DC 12V~13.8V
- Efficiency: 85~90%
- Thermal Protection: 65°C +/- 5°C
- Input Polarity Reverse: Diode Protection
- Output Polarity Reverse: Circuit Protection
- Output Short: Circuit Protection
- Over Heating: Circuit Protection
- Over Load: Circuit Protection
- Input Fuse: 4x30A
- Dimensions(L x W x H): 365x165x79mm
- Net Weight: 3.03Kg



POWER PRODUCTS

POWER ACCESSORIES



20-115-21U

1 AC OUTLET & DUAL USB PORTS
WALL OUTLET CHARGING CENTER
FOR USB ELECTRONICS

- AC 125V, 15A, 1875W, 60Hz
- Converts 1 AC outlet to 1 AC outlet and dual USB port
- ABS Resistance burning (94V-0) housing
- 2 ports USB total 2.1A
- ETL Approved



20-3245-21U

WALL OUTLET CHARGING CENTER FOR
USB ELECTRONICS

- AC Rating: 15A/125V/1875W
- Max. Spike Voltage: 550V
- Clamping Voltage: 550V
- 245J Surge Suppressor to Protect Sensitive Electronic Equipment
- USB 1.1A + 1.0A



20-6450-31U

POWER STRIP CHARGING CENTER
FOR USB ELECTRONICS

- AC Rating: 15A/125V/1875W
- Max. Spike Voltage: 550V
- Clamping Voltage: 550V
- 450J Surge Suppressor to Protect Sensitive Electronic Equipment
- Length: 3'
- USB 2.1A + 1.0A
- For indoor use and dry locations
- Use for portable electronics, video game console



22-6450-31U

WALL OUTLET CHARGING CENTER
FOR USB ELECTRONICS

- AC Rating: 15A/125V/1875W
- Max. Spike Voltage: 550V
- Clamping Voltage: 550V
- 450J Surge Suppressor to Protect Sensitive Electronic Equipment
- USB 2.1A + 1.0A
- 6 AC Outlets & Dual USB Ports



POWER PRODUCTS

POWER ACCESSORIES

13-414

6 OUTLET AC POWER STRIP


- High impact, fire-retardant plastic housing
- Outlets: 6 "U" ground
- Power supply: 14AWG x 3C SJT
- Length: 3'
- Switch: lighted approach switch
- Max rating: 15A/120V AC/60Hz/1800 Watts
- **90 JOULES** surge suppressor to protect sensitive electronic equipment
- For indoor use and dry locations



13-6400

6 OUTLET AC POWER STRIP

- High impact, fire-retardant plastic housing
- Outlets: 6 "U" ground
- Power supply: 14AWG x 3C SJT
- Length: 2'
- Switch: lighted approach switch
- Max. rating: 15A/120V AC/60Hz/1800 Watts
- **400 JOULES** surge suppressor to protect sensitive electronic equipment
- For indoor use and dry locations



14-516

6 OUTLET GROUNDED WALL SOCKET

- 110V
- Ideal for home offices



14-512

3 OUTLET GROUNDED WALL SOCKET

- 110V
- Converts single 3-prong outlet to three 3-prong outlets

16-516S

6 OUTLET WALL SOCKET

- High Impact, Fire-Retardant Plastic Housing
- Outlets: 6 "U" Ground
- Max Rating: 15A / 125V AC/60Hz/1875W
- 1000 Joules Surge Suppressor to protect sensitive Electronic Equipment
- For indoor use only and dry locations
- Can swivel to redirect Power and safely slide all your furniture back
- Creates extra space where you need it most



14-519

3 OUTLET SWIVELING GROUNDED WALL SOCKET

- 110V
- Swiveling design ideal for tight spaces



14-509

3 OUTLET WALL SOCKET

- 110V



POWER PRODUCTS

UNIVERSAL AC/DC ADAPTERS



DVG-505

MULTI-OUTLET UNIVERSAL AC/DC ADAPTER

- Current: 500mA
- Input: 110/220V
- Output: 1.5, 3, 4.5, 6, 7.5, 9, 12V
- 6 detachable output plugs



DVG-1005

MULTI-OUTLET UNIVERSAL AC/DC ADAPTER

- Current: 100mA
- Input: 110/220V
- Output: 1.5, 3, 4.5, 6, 7.5, 9, 12V
- 6 detachable output plugs



DV-1500SQ

MULTI-OUTLET UNIVERSAL AC/DC ADAPTER

- Current: 1500mA
- Input: 110/220V
- Output: 3, 4.5, 6, 7.5, 9, 12, 15V



DV-2000

UNIVERSAL AC/DC ADAPTER

- Current: 2000mA
- Input: 110/220V
- Output: 3, 4.5, 6, 7.5, 9, 12, 15V
- Round pin



DV-2050CEL

UNIVERSAL AC/DC ADAPTER

- Current: 2000mA
- Input: 110/220V
- Output: DC 5V, 2A
- Universal 5V 2AMP Tablet and Smartphone Charger with 5 tips



DV-3467

UNIVERSAL AC/DC ADAPTER

- Current: 300mA
- Input: 110/220V
- Output: 3, 4.5, 6, 7.5, 9, 12V

DV-5100A

UNIVERSAL AC/DC ADAPTER

- Current: 500mA
- Input: 90/240V, 50/60Hz
- Output: 3, 4.5, 6, 7.5, 9, 12V
- Short circuit protection
- Thermal and overload cut-off
- 6 detachable output plugs



DV-5467

UNIVERSAL AC/DC ADAPTER

- Current: 500mA
- Input: 110/220V
- Output: 3, 4.5, 6, 7.5, 9, 12, 15V
- Extra plug for Walkman



DV-5467EU

UNIVERSAL AC/DC ADAPTER

- Current: 500mA
- Input: AC 110/220V
- Output: DC 1.5, 3, 6, 7.5, 9, 12V
- Extra plug for Walkman

POWER PRODUCTS

UNIVERSAL AC/DC ADAPTERS



AC-003RA

4FT AC POWER CORD WITH RIGHT ANGLE PLUGS

- Allows mounting of the TV closer to the wall so there is no gap.



CCC-DC4

4 Connector Cable

- Compatible with:
DVCA-24
DVCA548



CCC-DC8

8 Connector Cable

- Compatible with:
DVCA-24
DVCA548



DVCA-24

AC ADAPTER

- Input: AV 100-240V, 50/60Hz
- Output: DC 12V, 2A
- Power: 24W
- 2 A Output
- Connector Size: 5.5 x 2.5mm



DVCA-548

AC TO DC ADAPTER

- Input: AV 100-240V, 0.32-0.75A, 50/60Hz
- Output: DC 12V, 5A
- Power: 60W
- 5 A Output
- Connector Size: 5.5 x 2.5mm



DV-1000

MULTI-OUTLET UNIVERSAL AC/DC ADAPTER

- Current: 1000mA
- Input: 110/220V
- Output: 1.5, 3, 4.5, 6, 7.5, 9, 12V

POWER PRODUCTS

UNIVERSAL POWER ADAPTERS



DV-1012TV

AC POWER ADAPTER

- Current: 1000mA
- Input: 120V, 60Hz
- Output: 12V
- Used for TV's



DV-1035TV

AC ADAPTER

- Input: 110VAC, 60Hz
- Output: 13.5V
- Current: 1000mA
- Dual polarity
- Use for TV
- Plug: 5 mm



DV-700MX

AC POWER ADAPTER

- Current: 700mA
- Input: 120V, 60Hz
- Output: 18V



DVK-3D

VIDEO GAME AC/DC ADAPTER

- Input: 100-240V, 50-60Hz
- Output: 12V
- Current: 500mA
- Plug: 5mm

DVK-5D

VIDEO GAME AC ADAPTER

- Input: 120V, 50Hz
- Output: 12VDC
- Current: 1500mA
- Plug: 5mm



POWER PRODUCTS

UNIVERSAL ADAPTERS



DV-1700

UNIVERSAL AC/DC ADAPTER

- Input: 100-140VAC, 50Hz
- Output: 3, 4.5, 6, 7.5VDC, AT, ST,
- Current: 1700mA
- 6 detachable output plugs



DVA-2435F

PORTABLE POWER SUPPLY WITH TV DOWN CONVERTER OUTPUT PLUGS

- Single voltage AC/DC adapter
- Input: 110-220VAC
- Output: 24VDC, AT, ET, BS & SAA input plugs
- Current: 350mA

DVA-500E

UNIVERSAL AC/DC ADAPTER

- Current: 1000mA
- Input: 110/220V
- Output: 1.5, 3, 4.5, 6, 7.5, 9, 12VDC, AT & ET input plugs
- 6 detachable output plugs

DVA-1000E

UNIVERSAL AC/DC ADAPTER

- Current: 1000mA
- Input: 110/220V
- Output: 1.5, 3, 4.5, 6, 7.5, 9, 12VDC, AT & ET input plugs
- 6 detachable output plugs



DVAS-1200

SWITCHING POWER ADAPTER

- Input: 200-250VAC
- Output: 3, 4.5, 5, 6, 7.5, 9, 12VDC, AT, ET, & ST input plugs
- Current: 1200mA
- 6 detachable output plugs



DVSW-2000

SWITCHING POWER ADAPTER

- Input: 90-240VAC
- Output: 3, 5, 6, 7.5, 9, 12VDC
- Current: 2000mA

POWER PRODUCTS

UNIVERSAL ADAPTERS



DLPT-902USB

90W AUTOMATIC UNIVERSAL
AC ADAPTER FOR LAPTOP

- USB port charges for smart phone, MP3, MP4, iPad, iPhone, Tablet PC, PDA and other related Devices with standard USB Output.



DLPT-903USB

90W AUTOMATIC UNIVERSAL
AC ADAPTER FOR LAPTOP

- Input: AC 100-240V, 1.8A, 50/60Hz (Max)
- Output: DC 15-20V, 6A (Max)



DLPT-1201USB

AUTOMATIC UNIVERSAL CAR/HOME
CHARGING (120W)

- Charge your notebook with this compact 120W Universal
- AC/DC Power Supply and Charger!



120W
POWER ADAPTER

ACER

COMPAQ

DELL

HP

IBM

SONY

TOSHIBA

LENOVO

FUJITSU

This charger provides up to 120 watts of power, and included 8 power tips that are compatible with most popular laptops and portable devices.

POWER PRODUCTS

ELECTRONIC PROTECTORS



PROTECT-AC

AIR CONDITIONER/FREEZER PROTECTOR

- For air conditioner, freezer, ice maker, and washing machine
- Over-voltage disconnection
- 3-minute safety cycle
- 3 mode LED indicator
- Detachable ground pin
- 3600 watts
- 2 HP
- AC 110V



PROTECT-AC220

AIR CONDITIONER/FREEZER PROTECTOR

- For air conditioner, freezer, ice maker, and washing machine
- Over-voltage disconnection
- 3-minute safety cycle
- 3 mode LED indicator
- Detachable ground pin
- 3600 watts
- 2 HP
- AC 220V



PROTECT-ELE

GENERAL ELECTRONIC PROTECTOR

- For TV's, video game systems, microwave ovens, computers, and audio systems
- Protects against problems originating in the AC electric line
- High and low voltage disconnection: low 90V, high 130V
- 10-second safety cycle
- 1800 watts
- Input: AC 115V, 60Hz, 15A
- AC 110V



PROTECT-RF

REFRIGERATOR PROTECTOR

- For all types of domestic refrigerators
- Over-voltage disconnection
- 3-minute safety cycle
- 3 mode LED indicator
- Detachable ground pin
- 1800 watts
- 1/2 HP
- AC 110V

POWER PRODUCTS

ELECTRONIC PROTECTORS

**FOTO
PENDIENTE**

PROTECT-D-ELEC2

GENERAL ELECTRONIC PROTECTOR

- For TV's, video game systems, microwave ovens, computers, and audio systems
- Protects against problems originating in the AC electric line
- High and low voltage disconnection: low 90V, high 130V
- 10-second safety cycle
- 1800 watts
- Input: AC 115V, 60Hz, 15A
- AC 110V
- 2 outlets

**FOTO
PENDIENTE**

**FOTO
PENDIENTE**

PROTECT-1208E

AUTOMATIC VOLTAGE REGULATOR

- For TV's, video game systems, microwave ovens, computers, and audio systems
- Protects against problems originating in the AC electric line
- High and low voltage disconnection: low 86V, high 138V
- Safety cycle switch with 3 settings: 2 seconds, 10 seconds, and 30 seconds
- 600 watts
- Input: 115V, 50/60 Hz auto-sensing
- LED status indicator for Boost, Overheat, and Buck
- 8 outlets

**FOTO
PENDIENTE**

POWER PRODUCTS

AC ADAPTERS



AC-282M

3 PIN AC EXTENSION PLUG OR
JACK PANEL MOUNT

- Male



P-510

FLAT PIN PLUG TO
ROUND PIN SOCKET



P-510D

DELUXE FLAT PIN PLUG TO
ROUND PIN SOCKET



P-510D-C

AC ADAPTER

- Input: 110-220V
- Output: 10A 250V
- Copper connectors



P-513

ROUND PIN PLUG TO FLAT PIN SOCKET



P-514

3-PRONG PLUG TO 2-PRONG OUTLET

- Permits "U" ground
- Orange color



P-514G

3-PRONG PLUG TO 2-PRONG OUTLET

- Permits "U" ground
- Grey color

POWER PRODUCTS

FOREIGN PLUG ADAPTER



P-517

MULTI-ADAPTER

- Adapts American outlets to most foreign plugs



P-519

EUROPEAN ADAPTER



P-521

FLAT PIN TO MULTI-PLUG ADAPTER

- Adapts American outlets to most foreign plugs



P-522

ROUND PIN TO MULTI-PLUG ADAPTER

- Adapts American outlets to most foreign plugs



AC-006 

FLAT PIN UNIVERSAL AC
CHEATER CORDS

- 6'
- For tape players



AC-010 

FLAT PIN UNIVERSAL AC
CHEATER CORDS

- 6'
- For tape players

POWER PRODUCTS

POWER CORDS



AC-2380 
FLAT PIN UNIVERSAL AC
CHEATER CORDS
• 6'
• For tape players




AC-011 
FLAT PIN UNIVERSAL AC
CHEATER CORDS
• 6'
• For tape players




AC-2206 
• Round pin universal AC cheater cords
• 6'
• For tape players




AC-012 
FLAT PIN FIGURE 8 AC
POWER CORD
• 6'
• Fits Panasonic, JVC, Sanyo & Fisher



AC-003 
MICKEY MOUSE TYPE GROUNDED
AC CHEATER CORD
• 6'
• Ideal for laptops and portable
projectors



AC-006HQ 
FLAT PIN UNIVERSAL AC CHEATER
CORD FOR TAPE PLAYERS
• 6'
• 18 ga
• For tape players



AC-088
A/C CORD WITH SPADE TERMINALS



CMC-200
APPLIANCE ELECTRICAL CORD
• Connector made of ABS and Bakelite for
resistance to extreme heat.
• Cable: 2*38*0.14 CCA
• OD: 3.8*7.6
• 10A 250V
• 6FT



IPC-200
IRON POWER CORD
• 6.5'
• Cotton, Brass
• Tinny Copper 99%

POWER PRODUCTS

BATTERY CHARGERS



LBCH-12M

DOUBLE INSULATED

- Thermal Overload Safety
- Electronic LED Display
- CE Approved
- For 12V Car, Motorcycle & Lawnmower Batteries
- 6/12V, 12 Amp



LBCH-612SW

6/12V, 6 AMP

- Blade Type Fuse
- Overload Protection



LBCH-6M

DOUBLE INSULATED

- Power Supply
- Thermal Overload Safety
- Electronic LED Display
- CE Approved
- For 12V Car, Motorcycle & Lawnmower Batteries
- 6/12V, 6 Amp



LBCH-6PL

AUTOMATIC BATTERY CHARGER

- 6A Automatic Charging
- Fully protects against sparks, short circuit and overheating
- Suitable for all types of 12 V Lead Acid Batteries between 20-110 AH
- LED display shows changes on the status indicator
- Automatically switches to maintenance mode when battery is fully charged
- Reverse polarity warning

LBCH-80M

THERMAL OVERLOAD SAFETY

- Electronic LED Display
- CE Approved
- For 12V Car, Motorcycle & Lawnmower Batteries
- 12V, 20 Amp



POWER PRODUCTS

EMERGENCY ACCESSORIES

EL-189R (with car adapter)

HANDY LIGHT WITH FM SCAN RADIO

- 6V/4.5Ah sealed lead-acid battery
- Bulb: 9W
- 5 hours of illumination
- Rechargeable and automatic light up



EL-189RDL

HANDY LIGHT WITH FM SCAN RADIO

- AC power: 110-220V
- Charging time: approx. 20-24 hours
- Duration time: approx. 20 hours (24 LED light), approx. 18 hours (radio)
- Rechargeable battery: 6V/4Ah sealed lead-acid



EL-1830RD (with car adapter)

RECHARGEABLE EMERGENCY FLUORESCENT LAMP

- FM scan radio
- Bulb: 10W x 3 fluorescent tubes
- 6V/4Ah sealed lead-acid rechargeable battery
- Green LED: power indicator
- Red LED: charge indicator overcharge and over discharge protection



EL-603D

CAMPING LANTERN

- 24 pcs bright LED
- Uses 4 D-size batteries
- Waterproof
- With handle and hanging hook



EL-3360L

RECHARGEABLE BRIGHT LED EMERGENCY LIGHT

- AC power: 110/220V
- Charging time: approx. 20-24 hours
- Duration time: approx. 22 hours (1 line), approx. 12 hours (2 lines), approx. 8 hours (3 lines)
- Rechargeable battery: 4V/2.8Ah sealed lead-acid



RMQT-301

ELECTRO SWAT

- It is safe for indoor or outdoor use, convenient hygienic insect terminator.
- Comes in Red, Yellow, Blue and Green



This Product requires 2 AA 1.5V Batteries (not included). The Electro Swat emits no smell, uses no poisonous or harmful material.

POWER PRODUCTS

ENERGY ACCESSORIES

EL-7005L

RECHARGEABLE HANDY LIGHT

- AC Power: 110-220V
- Charging Time: Approx. 12-15 Hours
- Duration Time: Approx 4 Hours
- Rechargeable Battery: 4V 0.4AH Sealed Lead-Acid Rechargeable Battery
- LED: 5x1500MCD, 110 Degree Bright LED Torch



EL-8003L

RECHARGEABLE HANDY LIGHT

- 4V 3Ah rechargeable lead-acid battery
- 12 x 1500MCD
- 110° bright LED



ELD-9827

LED WORK LIGHT

- 72 red LED for caution
- Super luminosity: 5000mcd
- Battery: AA 1200mAh 3.6V
- Mini work light: 20 LED
- Super luminosity: 13000mcd
- Battery: AAA 800mAh 3.6V
- Adaptor: 9V 300mA



ERT-667

REFLECTING TRIANGLE

- Warns oncoming traffic
- Great resource for roadside emergency
- Highly reflective orange plastic allows day and night use



POWER PRODUCTS

ENERGY ACCESSORIES

ELD-9004

RECHARGEABLE LED WORK LIGHT

- Full charge provides up to 5 hours of lighting
- No messy wires on the workshop floor
- Impact resistant polycarbonate lens
- Impact resistant ABS housing
- Cool and efficient operation 360° swivel hanging hook
- Unit is shatterproof, shock & water resistant (rubberized exterior)
- Ergonomically designed handle with on/off button switch
- Unit has a wall and/or desk mount recharging station



ELD-9838

30 LED WORK LIGHT

- Super luminosity: 13000mcd
- Torch: 1 LED (1 watt)
- Battery: 6 x AAA 800mA 3.6V
- Adaptor: 9V 300mA



ELD-9827

LED WORK LIGHT

- 72 red LED for caution
- Super luminosity: 5000mcd
- Battery: AA 1200mAh 3.6V
- Mini work light: 20 LED
- Super luminosity: 13000mcd
- Battery: AAA 800mAh 3.6V
- Adaptor: 9V 300mA



ERT-667

REFLECTING TRIANGLE

- Warns oncoming traffic
- Great resource for roadside emergency
- Highly reflective orange plastic allows day and night use



POWER PRODUCTS

ACCESSORIES

GR-507D

- Gas regulator with double hook
- Inlet Pressure: 1530~30Kpa
- Outlet Pressure: 2.75k ±0.499Kpa
- Gas Flow: 0.6m³/h
- Lock up Pressure: ≤3.43Kpa



GR-HP20LPG-4

PROPANE REGULATOR HIGH PRESSURE LPG
BBQ GAS BURNER HOSE 20 PSI.

- The regulator is adjustable up to 20 PSI
- 3/8" Flare Swivel Fitting



GRG-669

GAS REGULATOR

- Has a level indicator
- Inlet pressure: 1530-30Kpa
- Outlet pressure: 2.75k±0.499Kpa
- Gas flow: 0.6m³/h
- Lock up pressure: <3.43Kpa



GR-707

GAS REGULATOR

- Inlet pressure: 1530-30Kpa
- Outlet pressure: 2.75k±0.499Kpa
- Gas flow: 0.6m³/h
- Lock up pressure: <3.43Kpa

TPS-946

SOLAR TRICKLE CHARGER

- Helps to manage battery drain for 12V batteries
- Package: 12 pcs/carton (foam + color inner carton + outer carton)
- Outer carton size: 46.7 x 32.5 x 33cm
- Gross weight: 22kg



POWER PRODUCTS

BATTERY ACCESSORIES



NB-2
9-VOLT BATTERY SNAPS
WITH WIRE LEADS



NB-440B
30A BATTERY CLIP
• Black



NB-440R
30A BATTERY CLIP
• Red



NB-480
2 BATTERY CLIPS TO
CIGARETTE LIGHTER JACK



NB-550 BLK (Black)
NB-550 RED (Red)
50 AMP BATTERY CLIP
• Available in black and red



NB-660 BLK (Black)
NB-660 RED (Red)
60 AMP BATTERY CLIP
• Available in black and red



NB-770
70 AMP BATTERY JUMPER CABLE
• Available in black and red



NB-880
80 AMP BATTERY JUMPER CABLE
• Available in black and red



NP-210
CIGARETTE LIGHTER
PLUG TO 2 F JACKS

POWER PRODUCTS

LED BULBS



Cool White

ELED27-2CW

- 110V
- 2W
- Color Temperature: 6000°K Cool
- Lumens: 200
- Life: 20000hrs
- Base: E27
- Dimensions: Ø45 x 69mm



Warm White

ELED27-2WW

- 110V
- 2W
- Color Temperature: 3000°K Warm
- Lumens: 200
- Life: 20000hrs
- Base: E27
- Dimensions: Ø45 x 69mm



Cool White

ELED27-3CW

- 100V-240V (Auto-Voltage)
- 3W
- Color Temperature: 5700°K Cool
- Lumens: 300
- Life: 20000hrs
- Base: E27
- Dimensions: Ø60 x 110mm



Warm White

ELED27-3WW

- 100V-240V (Auto-Voltage)
- 3W
- Color Temperature: 2700°K Warm
- Lumens: 300
- Life: 20000hrs
- Base: E27
- Dimensions: Ø60 x 110mm



Cool White

ELED27-6CW

- 100V-240V (Auto-Voltage)
- 6W
- Color Temperature: 5700°K Cool
- Lumens: 500
- Life: 20000hrs
- Base: E27
- Dimensions: Ø60 x 110mm



Warm White

ELED27-6WW

- 100V-240V (Auto-Voltage)
- 6W
- Color Temperature: 2700°K Warm
- Lumens: 500
- Life: 20000hrs
- Base: E27
- Dimensions: Ø60 x 110mm

POWER PRODUCTS

ENERGY BULBS



EWBL-113-2U

65W ENERGY SAVING LIGHT BULB

- 13W consumption
- Daylight color
- 110V



EWBL-113-T3

65W ENERGY SAVING LIGHT BULB

- 13W consumption
- Daylight color
- 110V



EWBL-115-T3

75W ENERGY SAVING LIGHT BULB

- 15W consumption
- Daylight color
- 110V



EWBL-120-2U

100W ENERGY SAVING LIGHT BULB

- 20W consumption
- Daylight color
- 110V



EWBL-120-T3

100W ENERGY SAVING LIGHT BULB

- 20W consumption
- Daylight color
- DC 12V



EWBL-120-T4

100W ENERGY SAVING LIGHT BULB

- 20W consumption
- Daylight color
- 110V

POWER PRODUCTS

ENERGY ACCESSORIES



EWBL-12V9-T3

45W ENERGY SAVING LIGHT BULB

- 9W consumption
- Daylight color
- DC 12V



EWBL-125-T4

125W ENERGY SAVING LIGHT BULB

- 25W consumption
- Daylight color
- 110V



EWSL-125-T3

25W ENERGY SAVING SPOT LIGHT

- 110-120V/50-60Hz
- Color temperature: 6400K
- Lumens: 1150
- Life: 8000 hrs.
- Base: E27
- Dimensions: 160 x 120mm (LxA)



RFL-205

REPLACEMENT FLUORESCENT BULB FOR EL-205

- 20W, 23"



RFL-2300

REPLACEMENT FLUORESCENT BULB FOR EL-2300

- 10W, 10"



RFL-189R

REPLACEMENT BULB

- 10W, 10"

HOME SECURITY

CAMERAS & ACCESSORIES



DT200

VANDAL PROOF DOME CAMERA

- Compact 1/4" Color CCD board camera provides exceptional picture image
- Polycarbonate dome camera with metal plate
- Smoked camera housing provides unobtrusive appearance
- Rotate camera 360° and or tilt camera 90° for optimal angle selection
- Built-in automatic back light compensation.



MDT2000

SIMULATED DOME CAMERA

- Professional outlook design simulated dome camera with Flashing LED provides a real authentic look. IP44 housing, ideal for mounting the camera in-door or out-door, to prevent thieves and vandals.
- Flashing LED and connection cable
- Operates by 4 x AA-cells batteries. Will last more than 6 months
- Weatherproof IP44 Casing ideal for outdoor use
- Packaging: Clam Shell
- Pcs/ctn: 10 Pieces
- Gross Weight: 3.3Kg
- Carton Size: 51.5x23.5 x 18.5 (L x W x H)

CCCBL-25 (25')

CCCBL-50 (50')

CCCBL-75 (75')

CCCBL-100 (100')

CCCBL-150 (150')

CCCBL-250 (250')

CLOSED CIRCUIT TELEVISION EXTENSION CABLE

- Siamese Cable
- Solid Copper Conductor for Less Voltage Drop and Better Signal Over Longer Distances
- All in one video and power cable
- Plug and plug ready
- Cable functions for bnc or rca connection.
- BNC Male Connections On video Cable
- Male Jack, Plug Female On DC Power Cable
- Double Shielded with Aluminum Foil Insulation and Braiding
- Different Adaptors to Connect Lengths of Cable Together or to Connect to An RCA Jack



HOME SECURITY

ACCESSORIES



CC-TERM12SK

CCTV 12V TERMINAL

- Male DC jack connector plug for CCTV Security Camera
- No more cutting and soldering
- Simply screw your cable and just plug it in

CCTV -DC JACK w/SCREW 2.1 X 5



CCCTV-DC JACK

CCCTV -DC JACK

- Male DC jack connector plug for CCTV Security Camera
- No more cutting and soldering
- Simply screw your cable and just plug it in

CCCTV -DC JACK w/SCREW 2.1 X 5



CC-VB2000CB

1 CHANNEL PASSIVE VIDEO TRANSCIEVER WITH CABLE

- Video Transmission via UTP CAT5 Cable
- 10%~20% Wire Costs saved
- Full-motion CCTV Video at Distances up to 2000'(600M)
- Outstanding Interference Rejection and transient Protection
- Male BNC allows Connection directly to the Camera or DVR
- No Power required
- UP to 3000' (1KM) with active Receiver or Hub



CC-VB2000RA

1 CHANNEL RIGHT ANGLE PASSIVE VIDEO TRANSCIEVER

- Video Transmission via UTP CAT5 Cable
- 10%~20% Wire Costs saved
- Full-motion CCTV Video at Distances up to 2000'(600M)
- Outstanding Interference Rejection and transient Protection
- Male BNC allows Connection directly to the Camera or DVR
- No Power required
- UP to 3000' (1KM) with active Receiver or Hub



CC-VB2000T

1 CHANNEL PASSIVE VIDEO TRANSCIEVER

- Video Transmission via UTP CAT5 Cable
- 10%~20% Wire Costs saved
- Full-motion CCTV Video at Distances up to 2000'(600M)
- Outstanding Interference Rejection and transient Protection
- Male BNC allows Connection directly to the Camera or DVR
- No Power required
- UP to 3000' (1KM) with active Receiver or Hub



CC-VB-AUDPTZ

CCTV RJ45 CAT5 Cable Video + Power Balun

- BNC HD Passive Transceiver Pair
- Transmits video, audio and power signals over a single UTP cable
- Video transmission distance: 1300 feet
- Audio & power transmission distance: 328 feet
- BNC connector for video, RCA for Audio and 2.1 DC plug for power
- Compact size for easy installation

HOME SECURITY

CLOSED CIRCUIT TELEVISION

CC-DIN-BNC

CAMERA CABLE

- CCTV DIN conversion to BNC



PTC-3

FEMALE BC CABLE

- 2.1mm



PTC-4

MALE BC CABLE

- 2.1mm



CCC-DC4

4 CONNECTOR CABLE

- Compatible with:
DVCA-24
DVCA548



CCC-DC8

8 CONNECTOR CABLE

- Compatible with:
DVCA-24
DVCA548



DVCA-24

AC ADAPTER

- Input: AV 100-240V, 50/60Hz
- Output: DC 12V, 2A
- Power: 24W
- 2 A Output
- Connector Size: 5.5 x 2.5mm



DVCA-548

AC TO DC ADAPTER

- Input: AV 100-240V, 0.32-0.75A, 50/60Hz
- Output: DC 12V, 5A
- Power: 60W
- 5 A Output
- Connector Size: 5.5 x 2.5mm



HOME SECURITY

CLOSED CIRCUIT TELEVISION



CCSL-25

CLOSED CIRCUIT TELEVISION
• 25 Ft.

RG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference.

Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF)



CCSL-100

CLOSED CIRCUIT TELEVISION
• 100 Ft.

RG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference.

Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF)



CCSL-150

CLOSED CIRCUIT TELEVISION
• 150 Ft.

RG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference.

Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF)



HOME SECURITY

CLOSED CIRCUIT TELEVISION



CCSL-25WHT

CLOSED CIRCUIT TELEVISION EXTENSION CABLE

- 25 Ft.
- White color

CCTV ECONOMY EXTENSION CARG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference. Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF).



CCSL-50WHT

CLOSED CIRCUIT TELEVISION EXTENSION CABLE

- 50 Ft.
- White color

CCTV ECONOMY EXTENSION CARG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference. Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF).



CCSL-100WHT

CLOSED CIRCUIT TELEVISION EXTENSION CABLE

- 100 Ft.
- White color

CCTV ECONOMY EXTENSION CARG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference. Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF).



CCSL-150WHT

CLOSED CIRCUIT TELEVISION EXTENSION CABLE

- 150 Ft.
- White color

CCTV ECONOMY EXTENSION CARG59 Siamese cable is a heavily shielded cable which contains both the video (COAX) cable and the power cable (18 gauge 2 conductor) in one jacket. The advantages to using this cable is that its more durable, and you can run it long distances without interference. Includes 2 BNC -> RCA Male adapters in case your camera uses RCA connectors (component video) instead of BNC (RF).



HOME SECURITY

ACCESSORIES



CCPS-1210-9C

9 CHANNEL CCTV CAMERA

- Power Supply - 12VDC - 12Amps
- Input Voltage: AC100~240V 50~60Hz
- Output Voltage: DC12V
- ADJ: 11~14V
- Output Current: I(01~09)=10A(120Watts)
- Peak Value of Power: 145 Watts(DC12V 12Amp)



CCPS-1212-16C

16 CHANNEL CCTV CAMERA

- Power Supply - 12VDC - 12Amps
- Input Voltage: AC100~240V 50~60Hz
- Output Voltage: DC12V
- ADJ: 11~14V
- Output Current: I(01~16)=10A(150Watts)
- Peak Value of Power: 170 Watts(DC14V 12Amp)



GTS-018

MINI MOTION DETECTOR

- Emits Chime or Alarm for Use as Passive Door Bell or Security Alarm.



GTS-999-25

PASSIVE INFRA RED ALARM/VISITOR CHIME

- 24 Hours A Day Reliable Safety & Convenience D.I.Y.
- Design Requires No. wiring keypad access code control
- Reliable passive infra-red detection
- 10 meter range with 89° detection angle
- Built-in powerful alarm siren up to 120 dB
- Intruder alert before entry



976LR

IONIZATION SMOKE & FIRE ALARM

- Quick Find Alarm Locator
- Silence/Test Button
- Tamper Resistant Alarm
- Audible Low Battery Warning Signal
- Quick Change Battery Installation



USI-1227L

SMOKE & FIRE ALARM

- Low Battery Audible Indicator
- Mounting Hardware Included
- Large ring mounting bracket
- Fast and easy installation
- Test button

HOME SECURITY

DOORBELLS



WDB-500M

WIRELESS DOORBELL

- 52 Optional stereophonic music
- 300M radio transmission distance
- Extreme low-power consumption
- Four-level adjustable volume
- Exquisite exterior design
- Rated voltage: AC 110-220V 50/60Hz
- Volume: 20-85dB
- Power consumption of transmitter: <10mW
- Working frequency: 315MHz – 433.92MHz



GTS-022A

DIGITAL DOORBELL

- Cordless design
- Range approximately 80 meters
- Preset tunes
- Easy to install

WDB-300C

WIRELESS DOORBELL

- Size: Receiver: 80x27.5x87mm / Transmitter: 41x18x71mm
- Net Weight: Receiver: 105g / Transmitter: 35g
- Color: White
- Receiver Working Voltage: AC 110V 50Hz/60Hz
- Transmitter Battery: 12V 23A
- Plug of Receiver: USA Plug
- Sound Volume Range: 25-85dB
- Transmitter Power Consumption: <10mw
- Transmitter Working Voltage: 12V
- Working Frequency: 433MHz±2MHz
- Receiver Standby Current: <1.0mA
- Modern gloss finish suits home or office décor, easy wireless installation
- High frequency transmitter with advance code-matching technology ensure the error rated under 1/120000
- 52 selectable melodies
- 300m/984' transmission range
- Consumes less than 3 watts of power
- Water Resistant design



WDB-700CA

PIR SENSOR WIRELESS DOORBELL

- Easy for installation
- Used as Doorbell, Guest Welcome & Alarm
- 32 Melodies
- Sense Range: Max 8M
- Beam Angle: 90°
- Application: Store, Home, Office



Included: 12V
Transmitter Battery




HOME SECURITY

SOLAR MOTION LIGHTS

GTS-900-79

SOLAR MOTION LIGHT

- Solar panel: poly silicon 6V 3W
- Li-ion battery: 3.7V 4400mAh
- The light source power: 3W
- Solar charging time: 8Hrs
- Working Hours: More than 12 hours
- Induction distance: 6 to 12m
- Protection grade: Ip65
- Product size: 260*160*110mm
- Weight: 520g
- 6-12m sensing distance Ultra bright LED
- High-efficiency solar panel

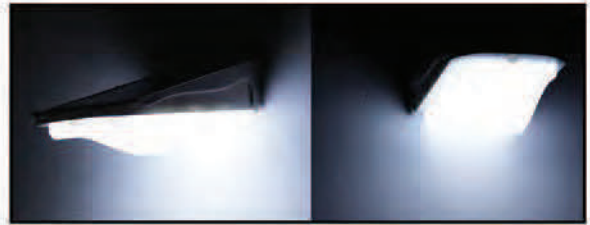

GTS-900-77

SOLAR MOTION LIGHT

- Solar panel: 0.55W, 17% efficiency
- Li-ion battery: 3.7V 900mAh
- Switch inside for saving power during shipment
- LED: 16pcs, SMD 3528
- Lumens: 100lm
- Led span life: 50,000Hrs
- Solar charging time: 8Hrs
- Lighting mode: Dark/DIM/bright, DIM: weak lighting for saving power, Bright: motion activate for lighting
- Auto identify day or night
- Protect function: Over charging, over discharging, over current, short circuit
- Li-ion battery span life: 500 circles
- Solar panel span life: more than 5 years
- Metal body, Never fades
- Waterproof and heatproof

