

HP10028 - DOUBLE AIR HORN




Product Description

Operation medium Decibel rating at 6 m [20 ft] Fundamental Frequency Operating Temperature Range Weight

Operating air Pressure Materials Finish Actuation Type Air Inlet Port Air 125 db @ 6.89 bar (gauge) [100 psig] 1800-3550 Hz -40°C to 120°C [-40°F to 248°F] 0.6 kg [1.4 lbs]

3.45-10.34 bar (gauge) [50-150 psig] Cast Aluminum and Thermoplastic Chrome Manual, or Solenoid 1/4 (-4) NPT

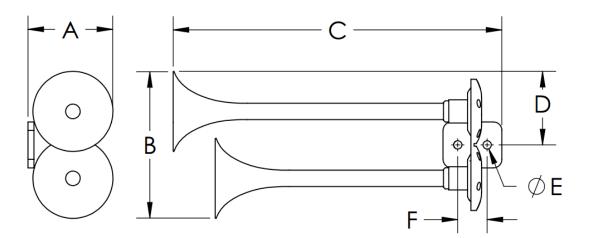

A - Width	B - Height	C – Length	D - Height	E – Mounting Holes	F – Bolt Spacing
95 mm	175 mm	360 mm	87.20	9.5 mm	35 mm
[3.74 in]	[6.89 in]	[14.57 in]	[3.43 in]	[0.38 in]	[1.38 mm]

All information contained in this document is for reference only, subject to change without notice