



Technical Data Sheet

Permatex® Heavy Duty Rubberized Undercoating

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® Heavy Duty Rubberized Undercoating is specially formulated to protect automotive underbodies from corrosion. The product dries to a firm, flexible, tack-free film has good abrasion resistance and effective sound-deadening properties. Rubberized for maximum thickness, durability and flexibility.

PRODUCT BENEFITS


- Seals
- Resists chipping
- Insulates

TYPICAL APPLICATIONS

- Automotive frames and under-bodies
- Rocker panels
- Wheel wells
- Rust holes
- Gutters, roofs, drain systems
- Driveway cracks
- Post preserving

DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. For best results, apply to clean, dry surfaces.
3. Tap bottom of can to loosen the ball agitator. Shake can for 2 minutes. For best results, aerosol can should be at room temperature before spraying.
4. Apply a uniform coating holding the can 10 to 12 inches from the surface to be coated.

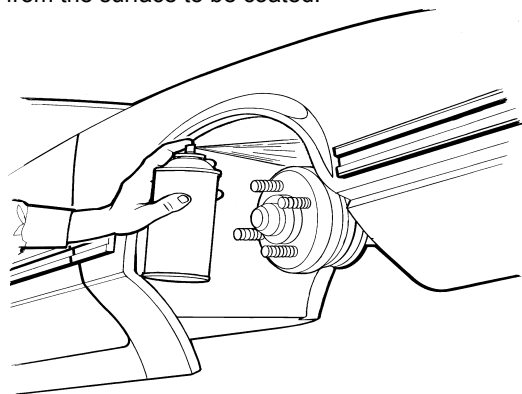

5. Multiple coatings are effective. Allow 15 to 20 minutes between coats. Recommend a minimum of 2 coats.

Note: Avoid spraying product on exhaust system.
This product is NOT considered paintable.

1. Turn can upside-down and spray to clear nozzle.
2. Excess material can be removed with mineral sprits.
3. Clean hands with Permatex® brand hand cleaners.

PROPERTIES OF MATERIAL

| | Typical Value |
|------------------------------|--|
| Chemical Type | Rubber |
| Appearance | Brown to black flim |
| Odor | Alcohol |
| Flash Point | Aerosol, contents under pressure, consult MSDS |
| NFPA 704 Flammability Rating | 4 (Highly Flammable) |

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

| Part Number | Container Size |
|---------------|--------------------|
| 81833 (135EA) | 20 oz. aerosol can |

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.