



# PROFILE


PERFORMANCE

## INSTALL GUIDE

### HI-LENS PROJECTOR

**WARNING:** By reading this document, I agree it is only to be used as an educational guide. Profile Performance nor its distributors make guarantees on any finished results, nor are they to be held responsible for any damage, misuse, or personal injuries. Use at your own risk. If you are unable to clearly understand and adapt the information below, professional installation is recommended.

#### WHAT'S INCLUDED




1x HI-LENS PROJECTOR



1x HARDWARE BAG

#### ASSEMBLY PROCESS

Slide on the silicone grommet, with the flat side facing backward so that the grommet fits snugly over the back of the projector. Fit the projector through the hole in the headlight reflector. Fit the best fitting of the three provided adapter plates for the reflector (H4, H7, and H11 styles are included). Fit the lock nut and tighten until snug.

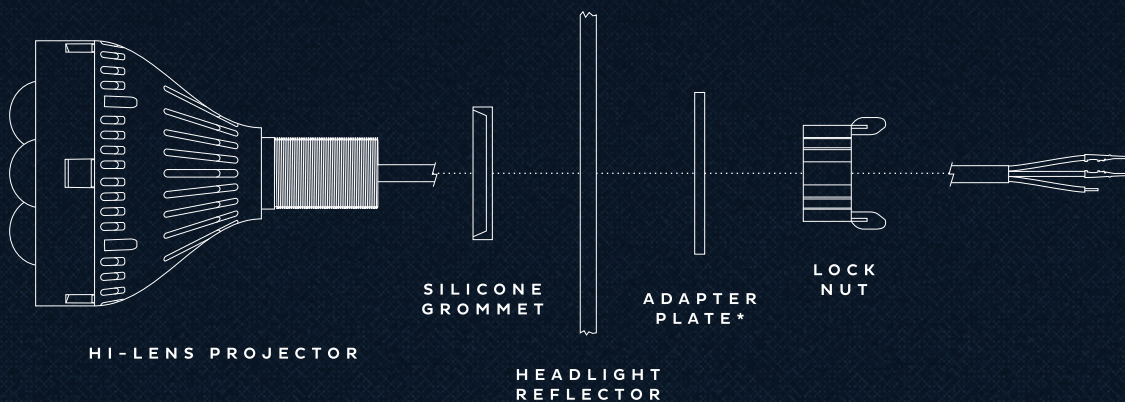


\*H4, H7, OR H11 STYLE



## WIRING PROCESS

For wiring to a 9005 high beam connector, fit the two pinned wires into the provided plastic 9005 male connector as shown below. The bare white wire can be tapped into a 12V+ of your choice for the DRL function. The DRL function requires a ground to function, not solely 12V+ input.

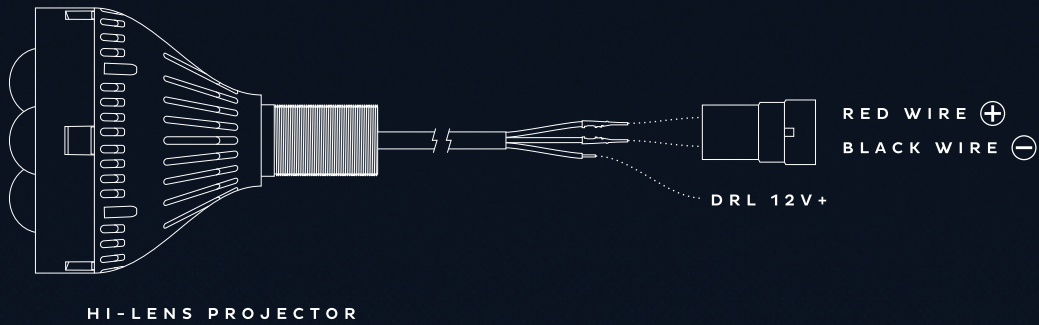

- END -

