

Installation Instructions

97-06 Jeep Wrangler TJ
04-06 Jeep Wrangler LJ



I-FRT-01

Factory Replacement Top

For proper installation and best possible fit, please read all instructions BEFORE you begin.

Important Safety Information



NOTE: Installation of the top in warm weather is optimal for ease of installation. Ideal installation temperature should not be less than 70° (21C). Initial installation is the most difficult as the fabric has not been stretched. The top will loosen slightly with use and warm temperature. Allow about at least an hour for the initial installation. ***Please follow instructions for ease of installation and correct fit.***

Contents

- (1) Soft top fabric skin
- (2) Rear quarter windows
- (1) Rear window

Tools Required



Safety Goggles



Phillips Head Screwdriver

1

NOTE: Actual application may vary slightly from illustrations.

Remove the quarter windows and rear window. Remove the tailgate bar from the rear window. The tailgate bar will be reused with the new top. Release the plastic window strips that retain the top above the front doors. Release the windshield latches on front header. **Do not fold the top back at this time.**



2

Release the rear corners of the top. Pull down and out on the rear corners to remove the fabric from the belt rail. Repeat this procedures for both sides.



3

Remove the (4) Phillips head screws on the rear bow using a (#2) Phillips head screwdriver. Do not use power tools. Set the screws aside as they will be used to attach the new top.



NOTE: Actual application may vary slightly from illustrations.


4

Unfasten the hook and loop retainer that secures the top to the bow located above the roll bar. It may be necessary to lower the top at this time to aid in the removal.



5

Lower the soft top and bow assembly. With the top collapsed on the rear of the vehicle, remove the screws that fasten the soft top fabric to the bottom of the header. Set the screws aside as they will be used to attach the new top.

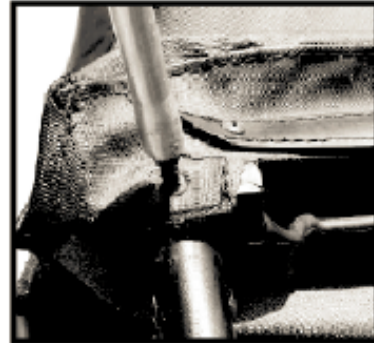

6

Remove the old top from the frame. Drape the new soft top over the back of the vehicle. Locate the front edge of the top with the plastic strip sewn on. Wrap the front edge around the header with the plastic strip facing upward. Attach the front edge of the top to the bottom side of the header using the screws removed earlier.



7

With the assistance of a second person, raise the top and bow assembly in the up position. Lock the header to the windshield. With the top laying loosely over the bow assemblies, re-attach the fabric to the bows using the screws removed earlier. The fabric on the rear bow wraps under from the back side of the bow toward the front of the vehicle.



8

Re-attach the hook and loop retainer around the front bow and middlebow.



9

Insert the rear corners of the soft top into the belt rail on the rear of the vehicle.



10

Insert the rear corners of the soft top into the belt rail on the rear of the vehicle.



11

Install the side windows and rear window onto the top. Replace the tailgate bar into the rear window.



12

Secure the top above the doors by inserting the plastic retainer strips into the door surround. Your new top installation is now complete.



Care and Cleaning

Convertible tops and accessories require special care if you want to get the maximum usage and enjoyment from them. The following recommendations, if followed carefully, can extend the life of your top or accessory.

Hand wash using a mild non-detergent soap such as ivory. Use a non-abrasive cloth or sponge. Rinse thoroughly. Do not wash in direct sunlight and avoid automatic car washes. When your top is clean, we recommend using "Ragg Topp" or "303 Protectant" on both the vinyl top and windows. This product contains a sunscreen that helps protect from the sun's damaging rays. Stay away from products containing alcohol, as it will cause the fabric and windows to lose their elasticity, thus reducing the life of your top or accessory.

Direct sunlight and heat are the biggest enemies of the windows. Park in the shade whenever possible. If you must park in the sunlight, rotate the direction that you park every few days so all windows get even exposure.

Our tops are designed so that you may roll up and/or store the rear curtain and side curtains. To prevent scratching of the windows, be sure that windows are completely clean and free of dust particles. Even a little dirt will badly scratch the windows. You may want to use a soft cloth when rolling up or storing your windows. Heat may build up on rolled up windows, so be sure to unroll them frequently. If you roll up the windows at the beginning of summer and leave them, they may be ruined by fall.

Do not open or roll up windows at temperatures below 45 degrees F this could cause them to crack or break.

Zipper Care

DO NOT use pliers or other tools to pull on zippers. If the zipper requires more force than pulling with your fingers something is most likely out of alignment or improperly installed. Be sure the top is up to a temperature of 70 deg., and that the components are installed correctly and in the correct sequence to ensure protection of the zipper.

Zippers require periodic cleaning and lubrication to ensure longevity and ease of use. Clean by wiping with a towel soaked in soap and water, DO NOT USE HARSH CHEMICALS. Zipper lubricants are available at sporting goods stores and online for wetsuits. An occasional use will keep the zipper slides operating as new.

Congratulations!

You have purchased one of the many quality Rampage branded products offered by Lund International. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



The material that your product is made from can be recycled. Please also consider recycling the packaging that your product came in.



LUND
INTERNATIONAL

Learn more about soft tops and hard tops we have.