


SURFACE MOUNTED THIRD BRAKE LIGHT REAR VIEW CAMERA

RVS-917

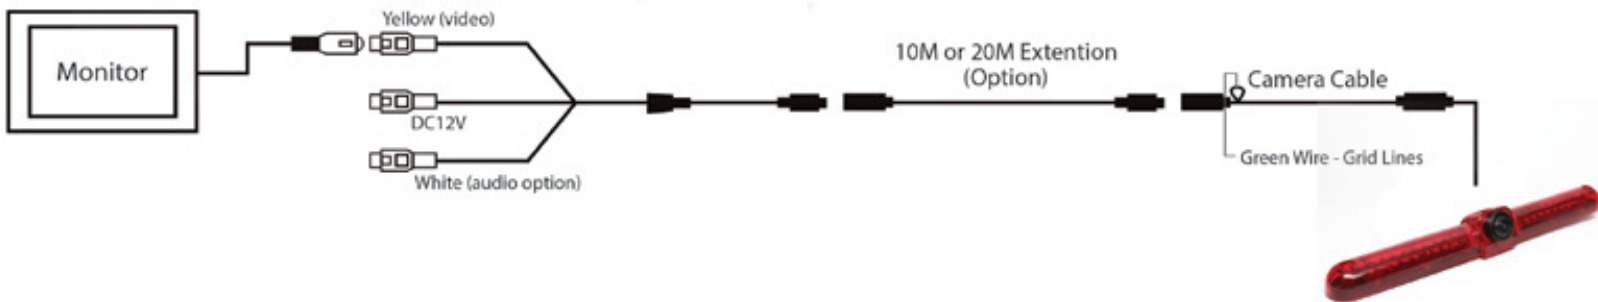

**REAR VIEW
SAFETY**

A Safe Fleet Brand

SPECIFICATIONS

CAMERA	MT9V139
SENSOR FORMAT	728 (H) X 560 (V)
PICTURE ELEMENTS	307,200 PIXELS
NTSC/PAL	720 (H) X 480 (V) 720 (H) X 576 (V)
OPTICAL FORMAT	1/4 INCH
GAMMA CORRECTION	R=0.45 TO 1.0
IMAGE SENSOR	480 TV LINES
LENS	2.1MM
VIEW ANGLE	130°
SYNC SYSTEM	INTERNAL SYNCHRONIZATION
NIGHT VISION	YES
USABLE ILLUMINATION	0.3 LUX
POWER SOURCE	DC 12V (+/-10%)
S/N RATIO	MORE THAN 48DB
ELECTRONIC IRIS	1/50, 1/60-1/100,000SEC
VIDEO OUTPUT	1VP-P, 75 Ω
IR SWITCH CONTROL	CDS AUTOMATIC CONTROL
VIBRATION RATING	10G
OPERATING TEMPERATURE	-40°C - 50°C / RH 95% MAX
STORAGE TEMPERATURE	-40°C - 60°C / RH 95% MAX
NET WEIGHT	11 OZ

130° Viewing Angle

Ultra wide angle



Night Vision

With very little ambient light provides a great picture at night



IP68 Rating

Protected against complete, continuous submersion in water



Brake Light Housing

Replaces the third brake light, for a factory-like install



Brake Lights Included



UNIVERSAL THIRD BRAKE LIGHT CAMERA

Our Universal Third Brake Light Camera mounts to any flat service making for a very clean install.

It comes with a viewing angle of 130 degrees and it's MT9V139 lens provides an image quality of 480 TV lines.

Night vision is supported and with even a very limited amount of ambient light, this camera will provide a crystal clear image. With an IP68 weatherproof rating this camera will be fit to ride out any storm and boasts a 10G vibration rating as well as aircraft grade cable connections.

Learn more about other cameras & driver safety products by Rear View Safety on our website.