


# Installation Instruction for GM 4L80E Transmission Harness with Temperature Sensor

1. Remove old wire harness from valve body.
2. Install new Rostra wire harness.
3. Plug-in connectors as shown in the figure below

**NOTE: Use this wiring harness as is with temperature sensor. If existing, leave the current temperature sensor in the valve body unconnected. There is not connector for this sensor.**

EXISTING TEMPERATURE SENSOR ON SOME EARLY MODELS.  
**NOTE: LEAVE IN VALVE BODY, NO WIRE CONNECTION NECESSARY**

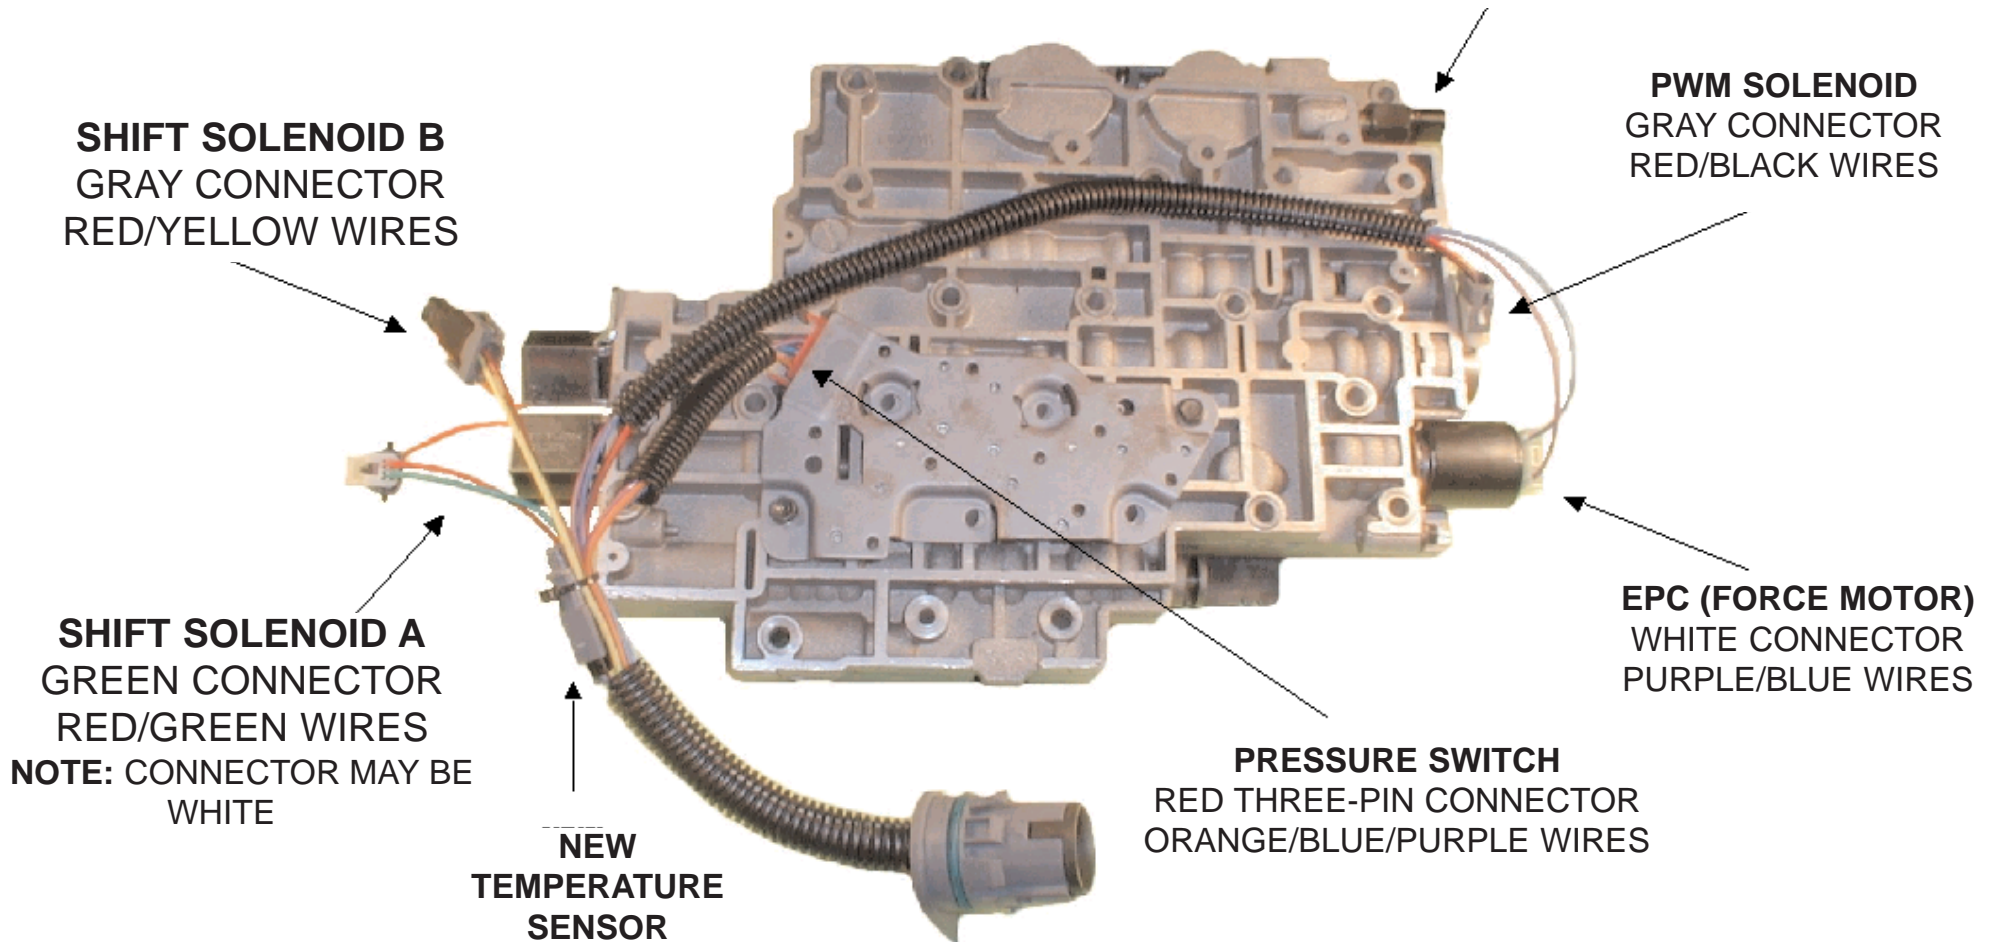

**NOTE: FOR PRE 1993 VEHICLES, EXTERNAL HARNESS MUST BE CONVERTED TO LATER STYLE CONNECTOR USING ROSTRA PART #350-0033, 4L80E EXTERNAL HARNESS REPAIR KIT**