


17415

US stock number	17415
Design	HM21
Lip material	R
SKF Bore Tite Coating	

Dimensions

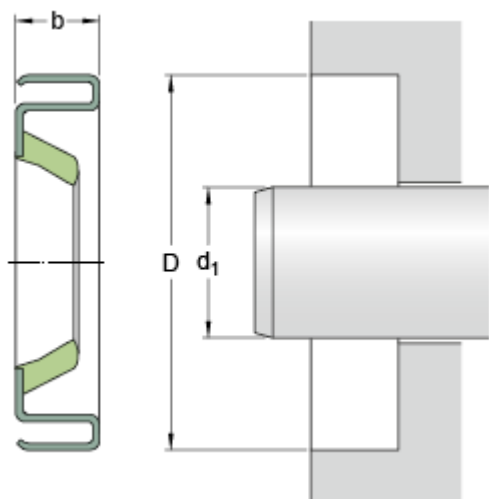

d_1	44.45	mm
D	65.05	mm
b	6.35	mm

Application and operating conditions

Pressure differential	max.	0.07	MPa
Operating temperature	min.	-40	°C
Operating temperature	max.	100	°C
Operating temperature, short period	max.	120	°C
Rotational speed	max.	4297	r/min
Shaft surface speed	max.	10	m/s