

INSTALLATION & CARE

2007-2014 GMC YUKON PROJECTOR HEADLIGHT INSTALLATION INSTRUCTION

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED


1/4" Ratchet	10 mm Socket	7 mm Socket	6" Socket Extension
			
Plastic Fastener Remover			
			

PRODUCT NUMBER


2LHP-DEN07-G2-TM
2LHP-DEN07JM-G2-TM
2LHP-DEN07G-G2-TM
2LHP-DEN07BK-G2-TM



LET'S START THE INSTALLATION

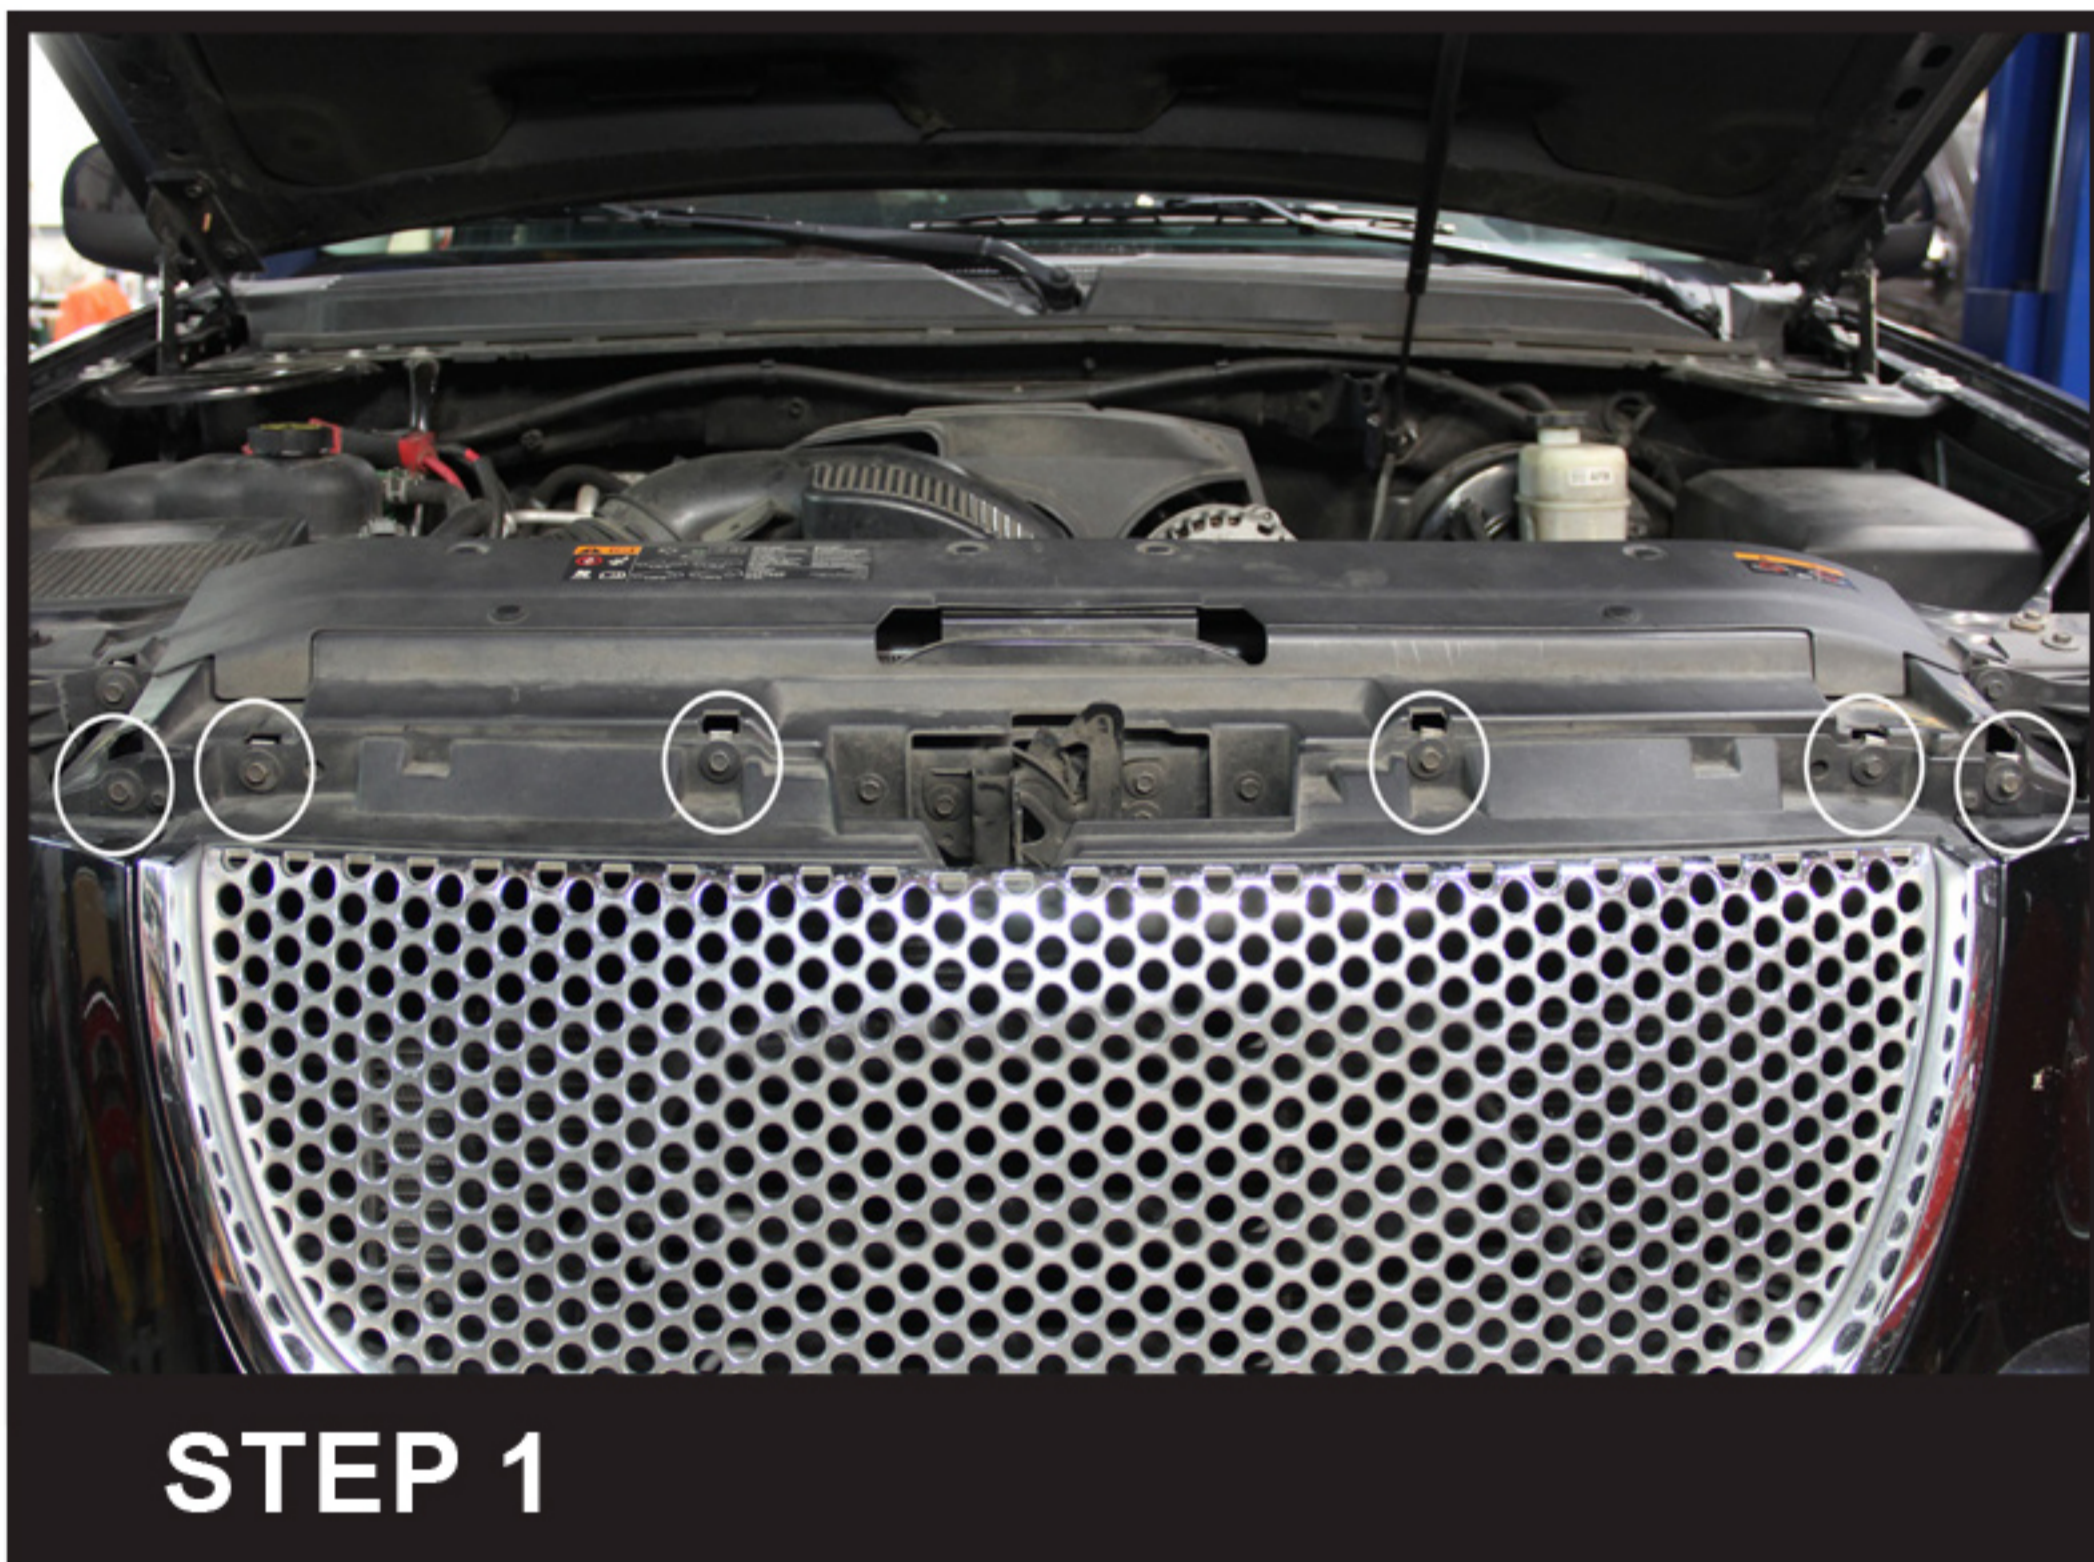

Remove the six 10mm bolts on top of the front grille

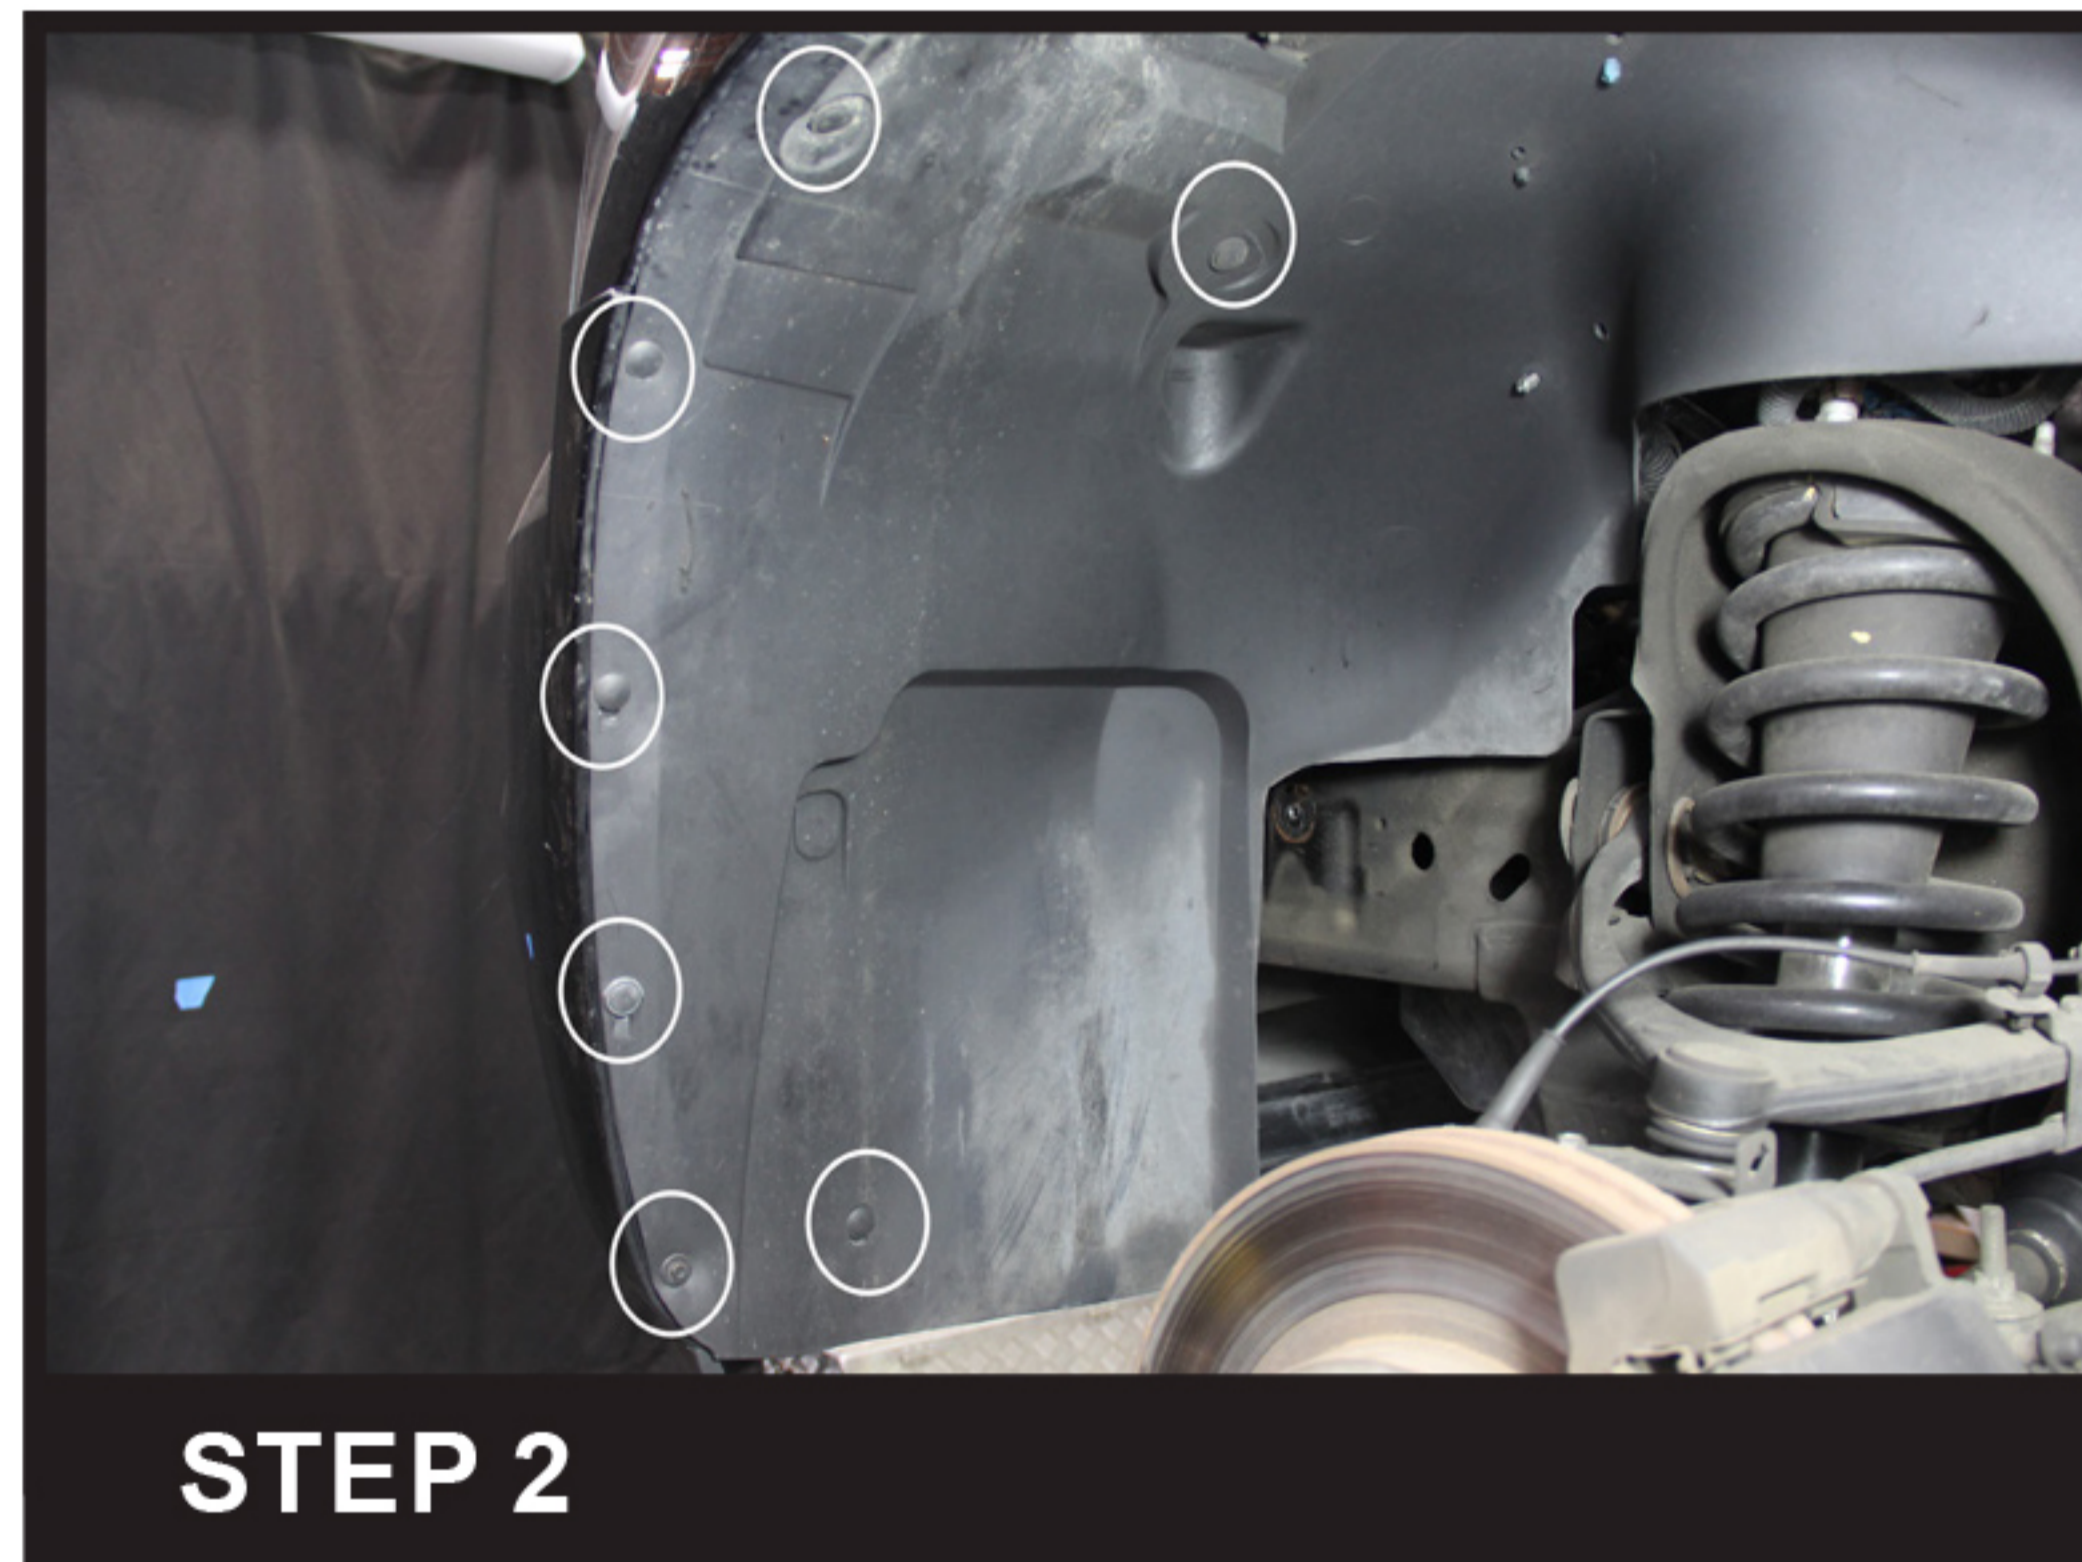

Remove the six clips and the 7mm bolt on the wheel fender liner



Remove the two 10mm front bumper mounting bolts



Remove the 10mm headlight bolt at the bottom of the headlight



Remove the two 10mm headlight bolts at the top of the headlight




Unseat the factory headlight housing



STEP 7

Disconnect the headlight harness and remove the factory headlight housing

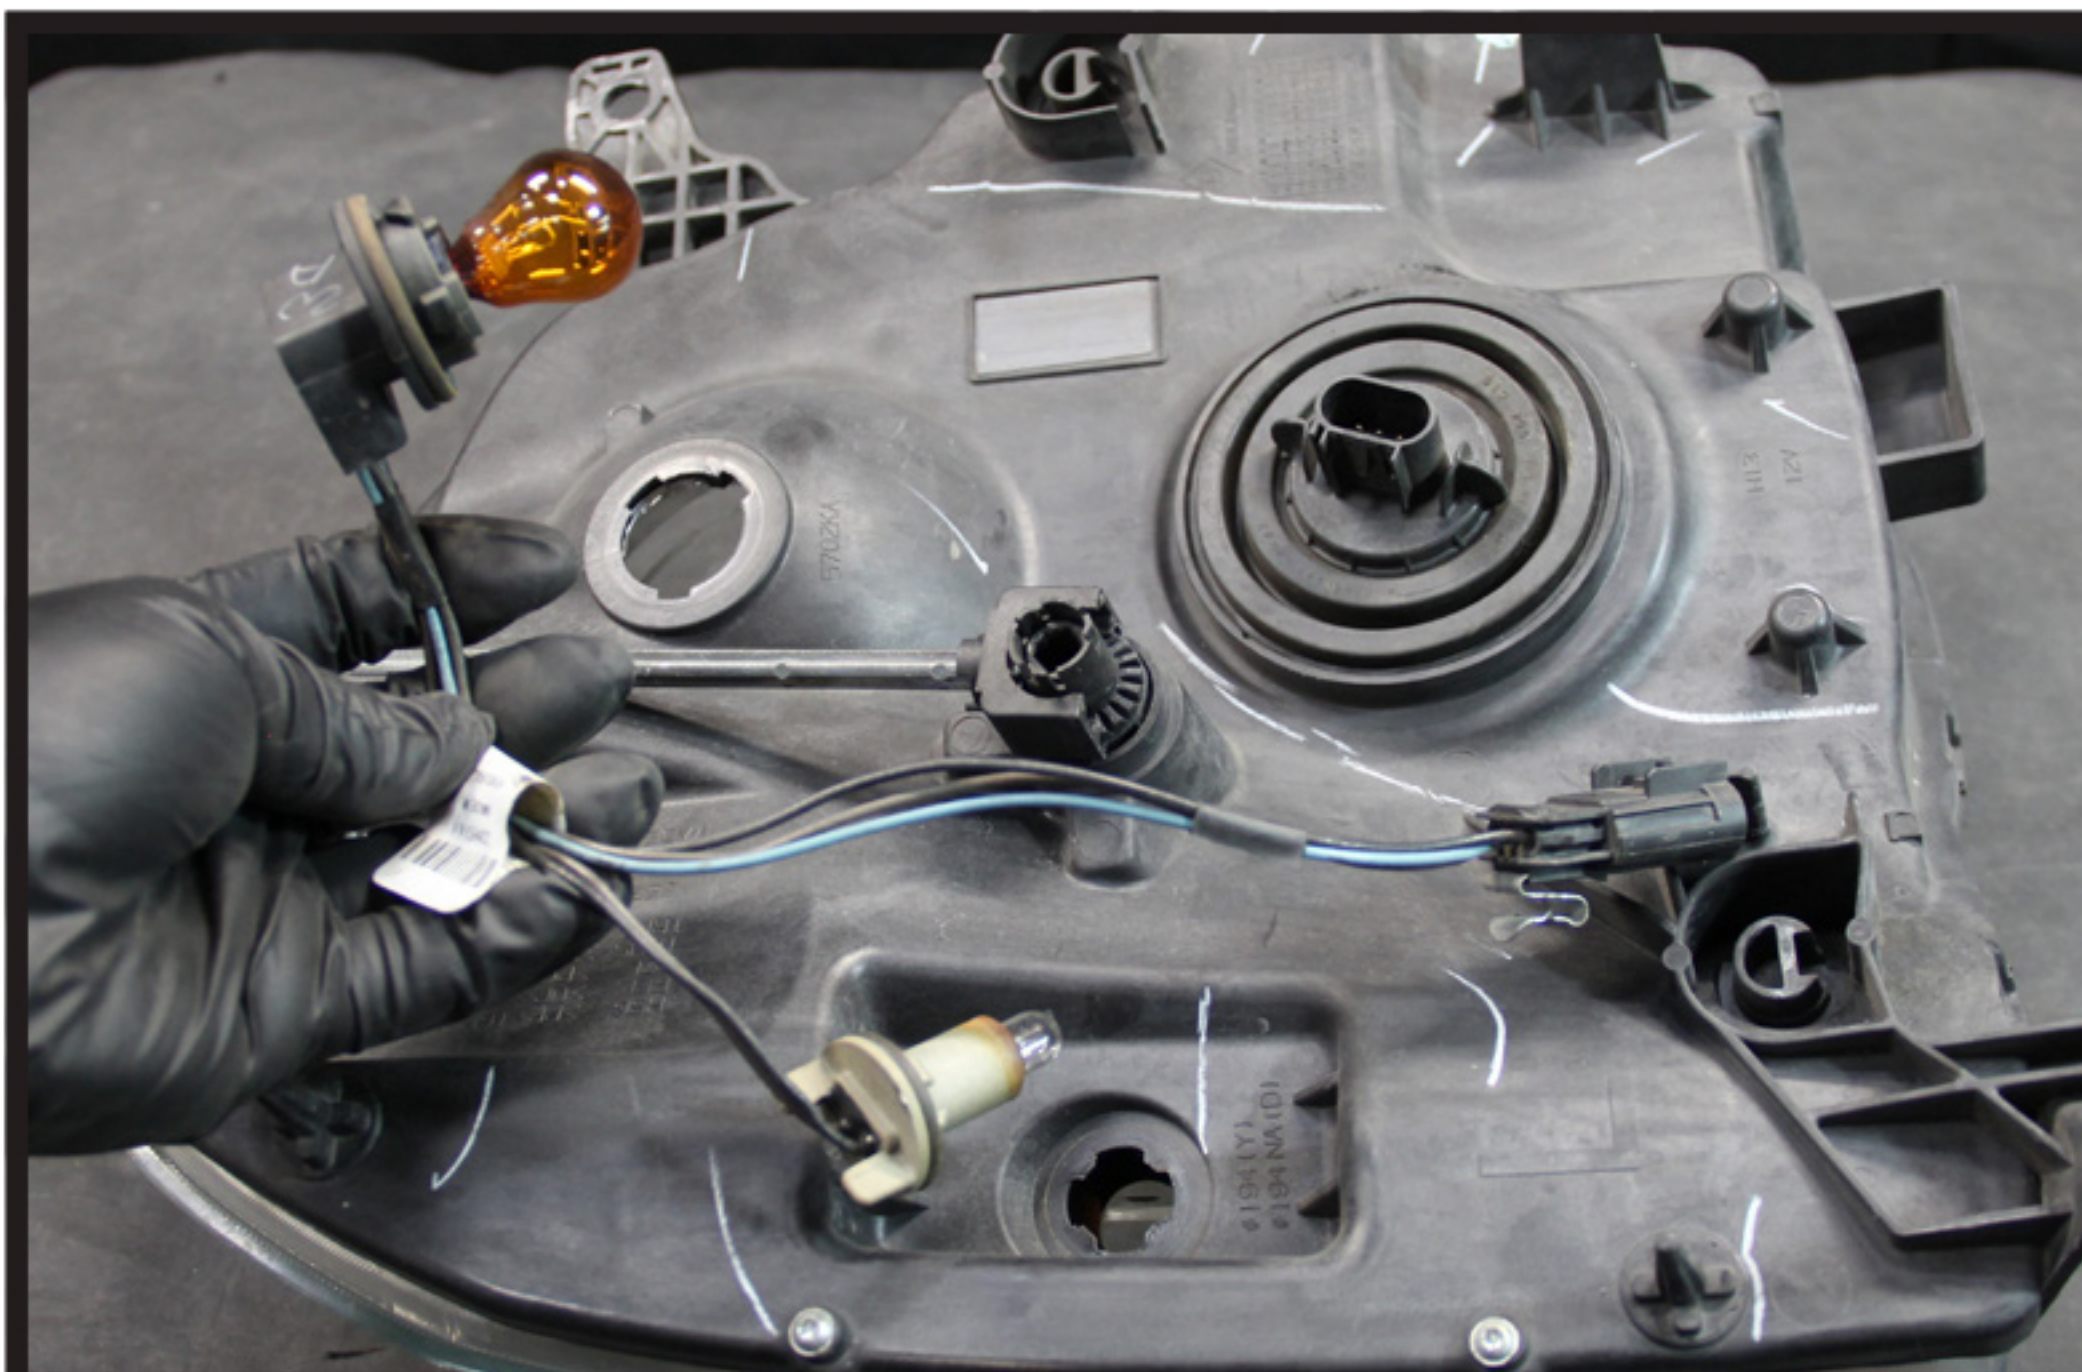

STEP 8

Remove the headlight harness from the factory headlight housing



STEP 9

Remove the parking light bulb and the signal light bulb from the socket



STEP 10

Insert the signal light connector from the new headlight housing to the socket, (+) to (+) and (-) to (-)



STEP 11

Insert the parking light connector from the new headlight housing to the socket, (+) to (+) and (-) to (-)



STEP 12

Install the headlight harness to the new headlight housing




STEP 13

Connect the headlight harness



STEP 14

Seat the new headlight assembly in place

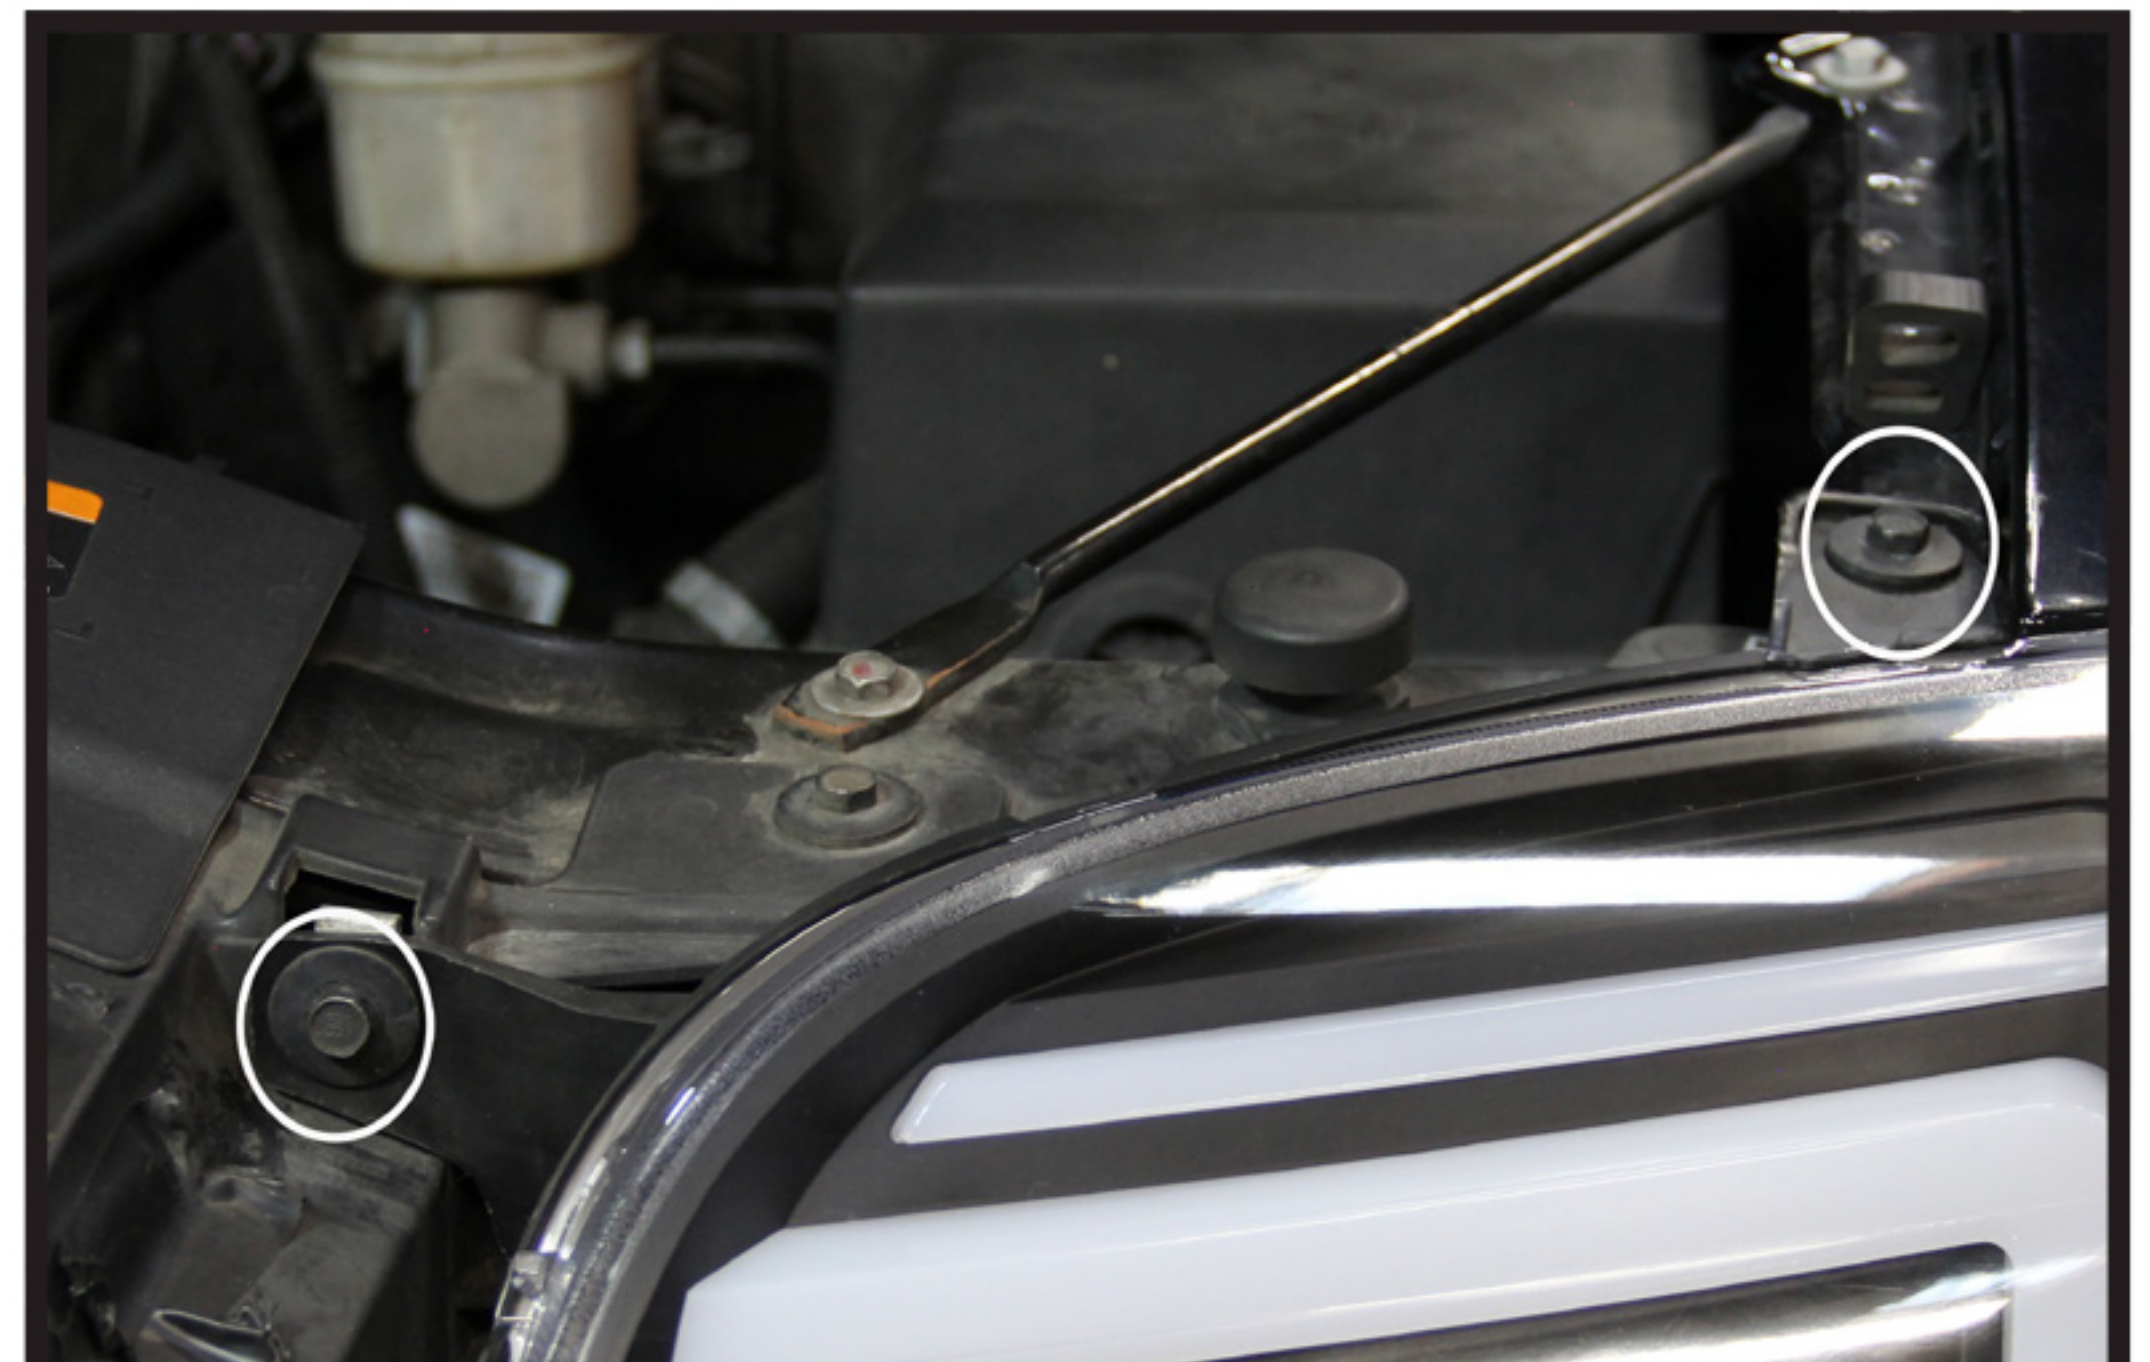

STEP 15

Reinstall the two 10mm headlight bolts at the top of the headlight




STEP 16

Reinstall the 10mm headlight bolt at the bottom of the headlight




STEP 17

Reinstall the two 10mm front bumper mounting bolts

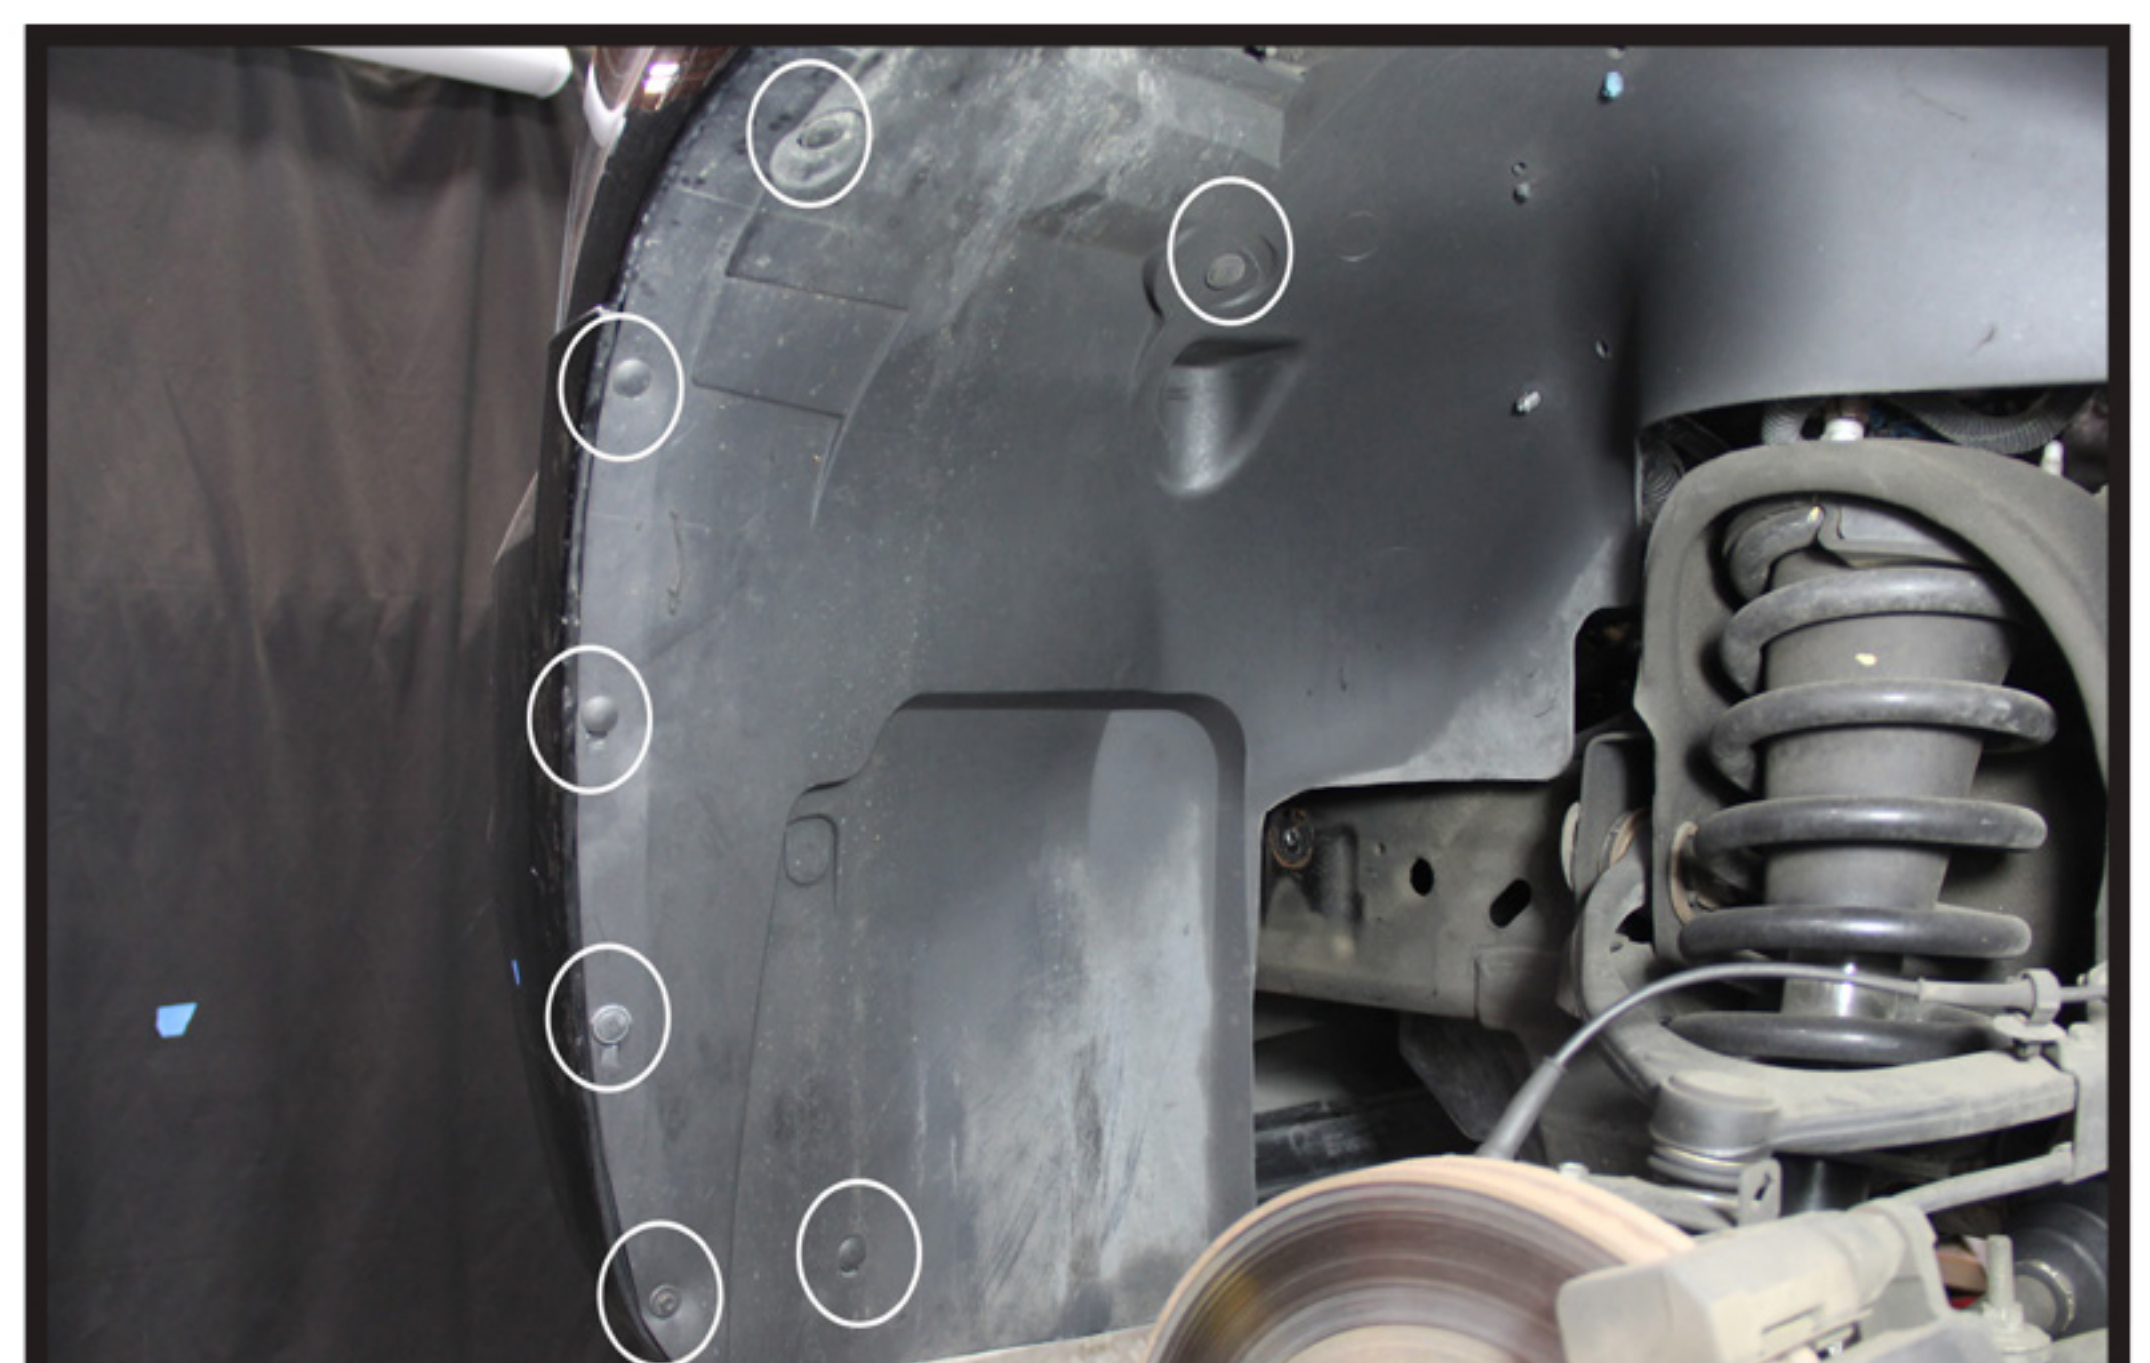


STEP 18

Reinstall the six clips and the 7mm bolt on the wheel fender liner

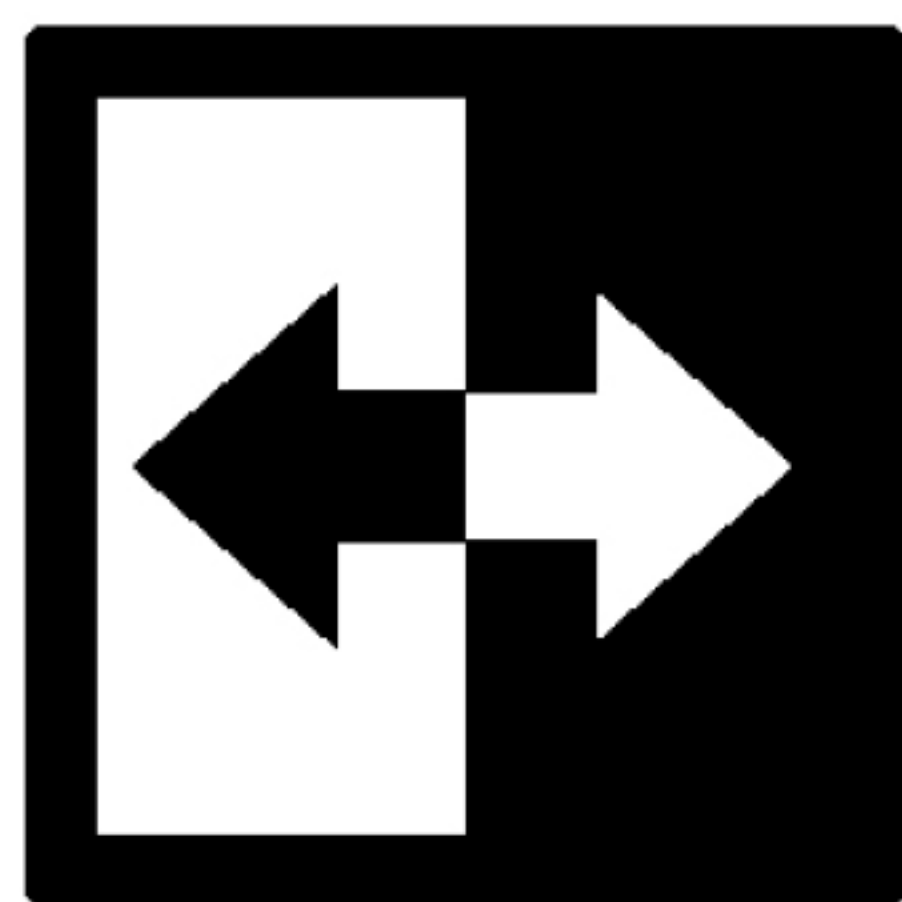

STEP 19

Please repeat the steps from 2 to 18 for the opposite side

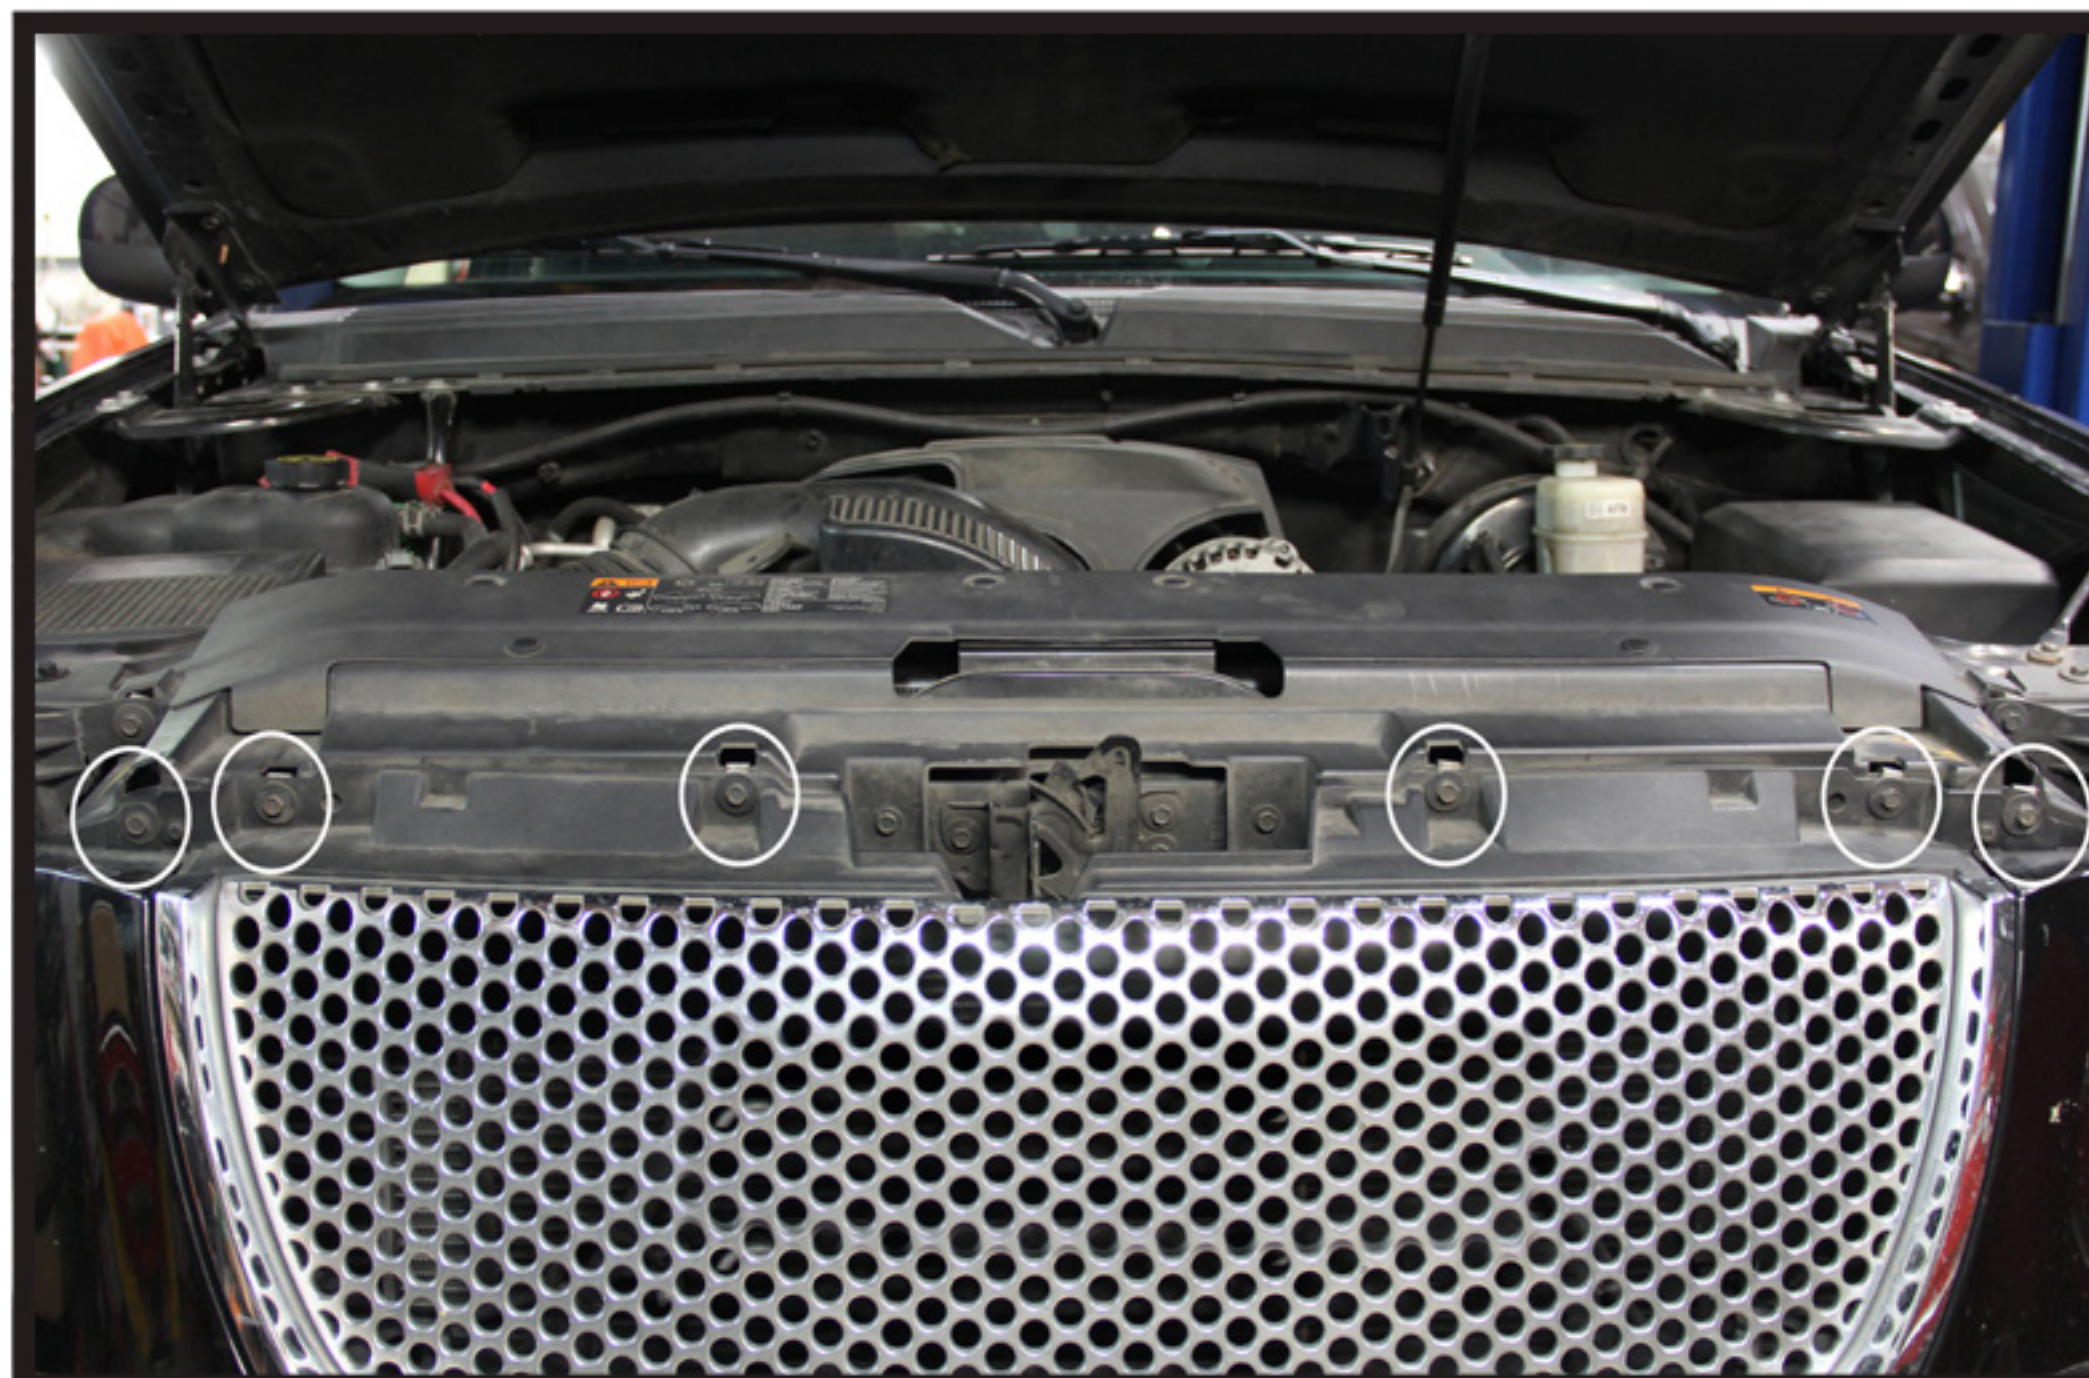

STEP 20

Reinstall the six 10mm bolts on top of the front grille



STEP 21

Close the hood to complete the installation




INSTALLATION & CARE

2007-14 GMC YUKON PROJECTOR HEADLIGHT INSTALLATION INSTRUCTION

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2007-14 GMC YUKON PROJECTOR HEADLIGHT INSTALLATION INSTRUCTION

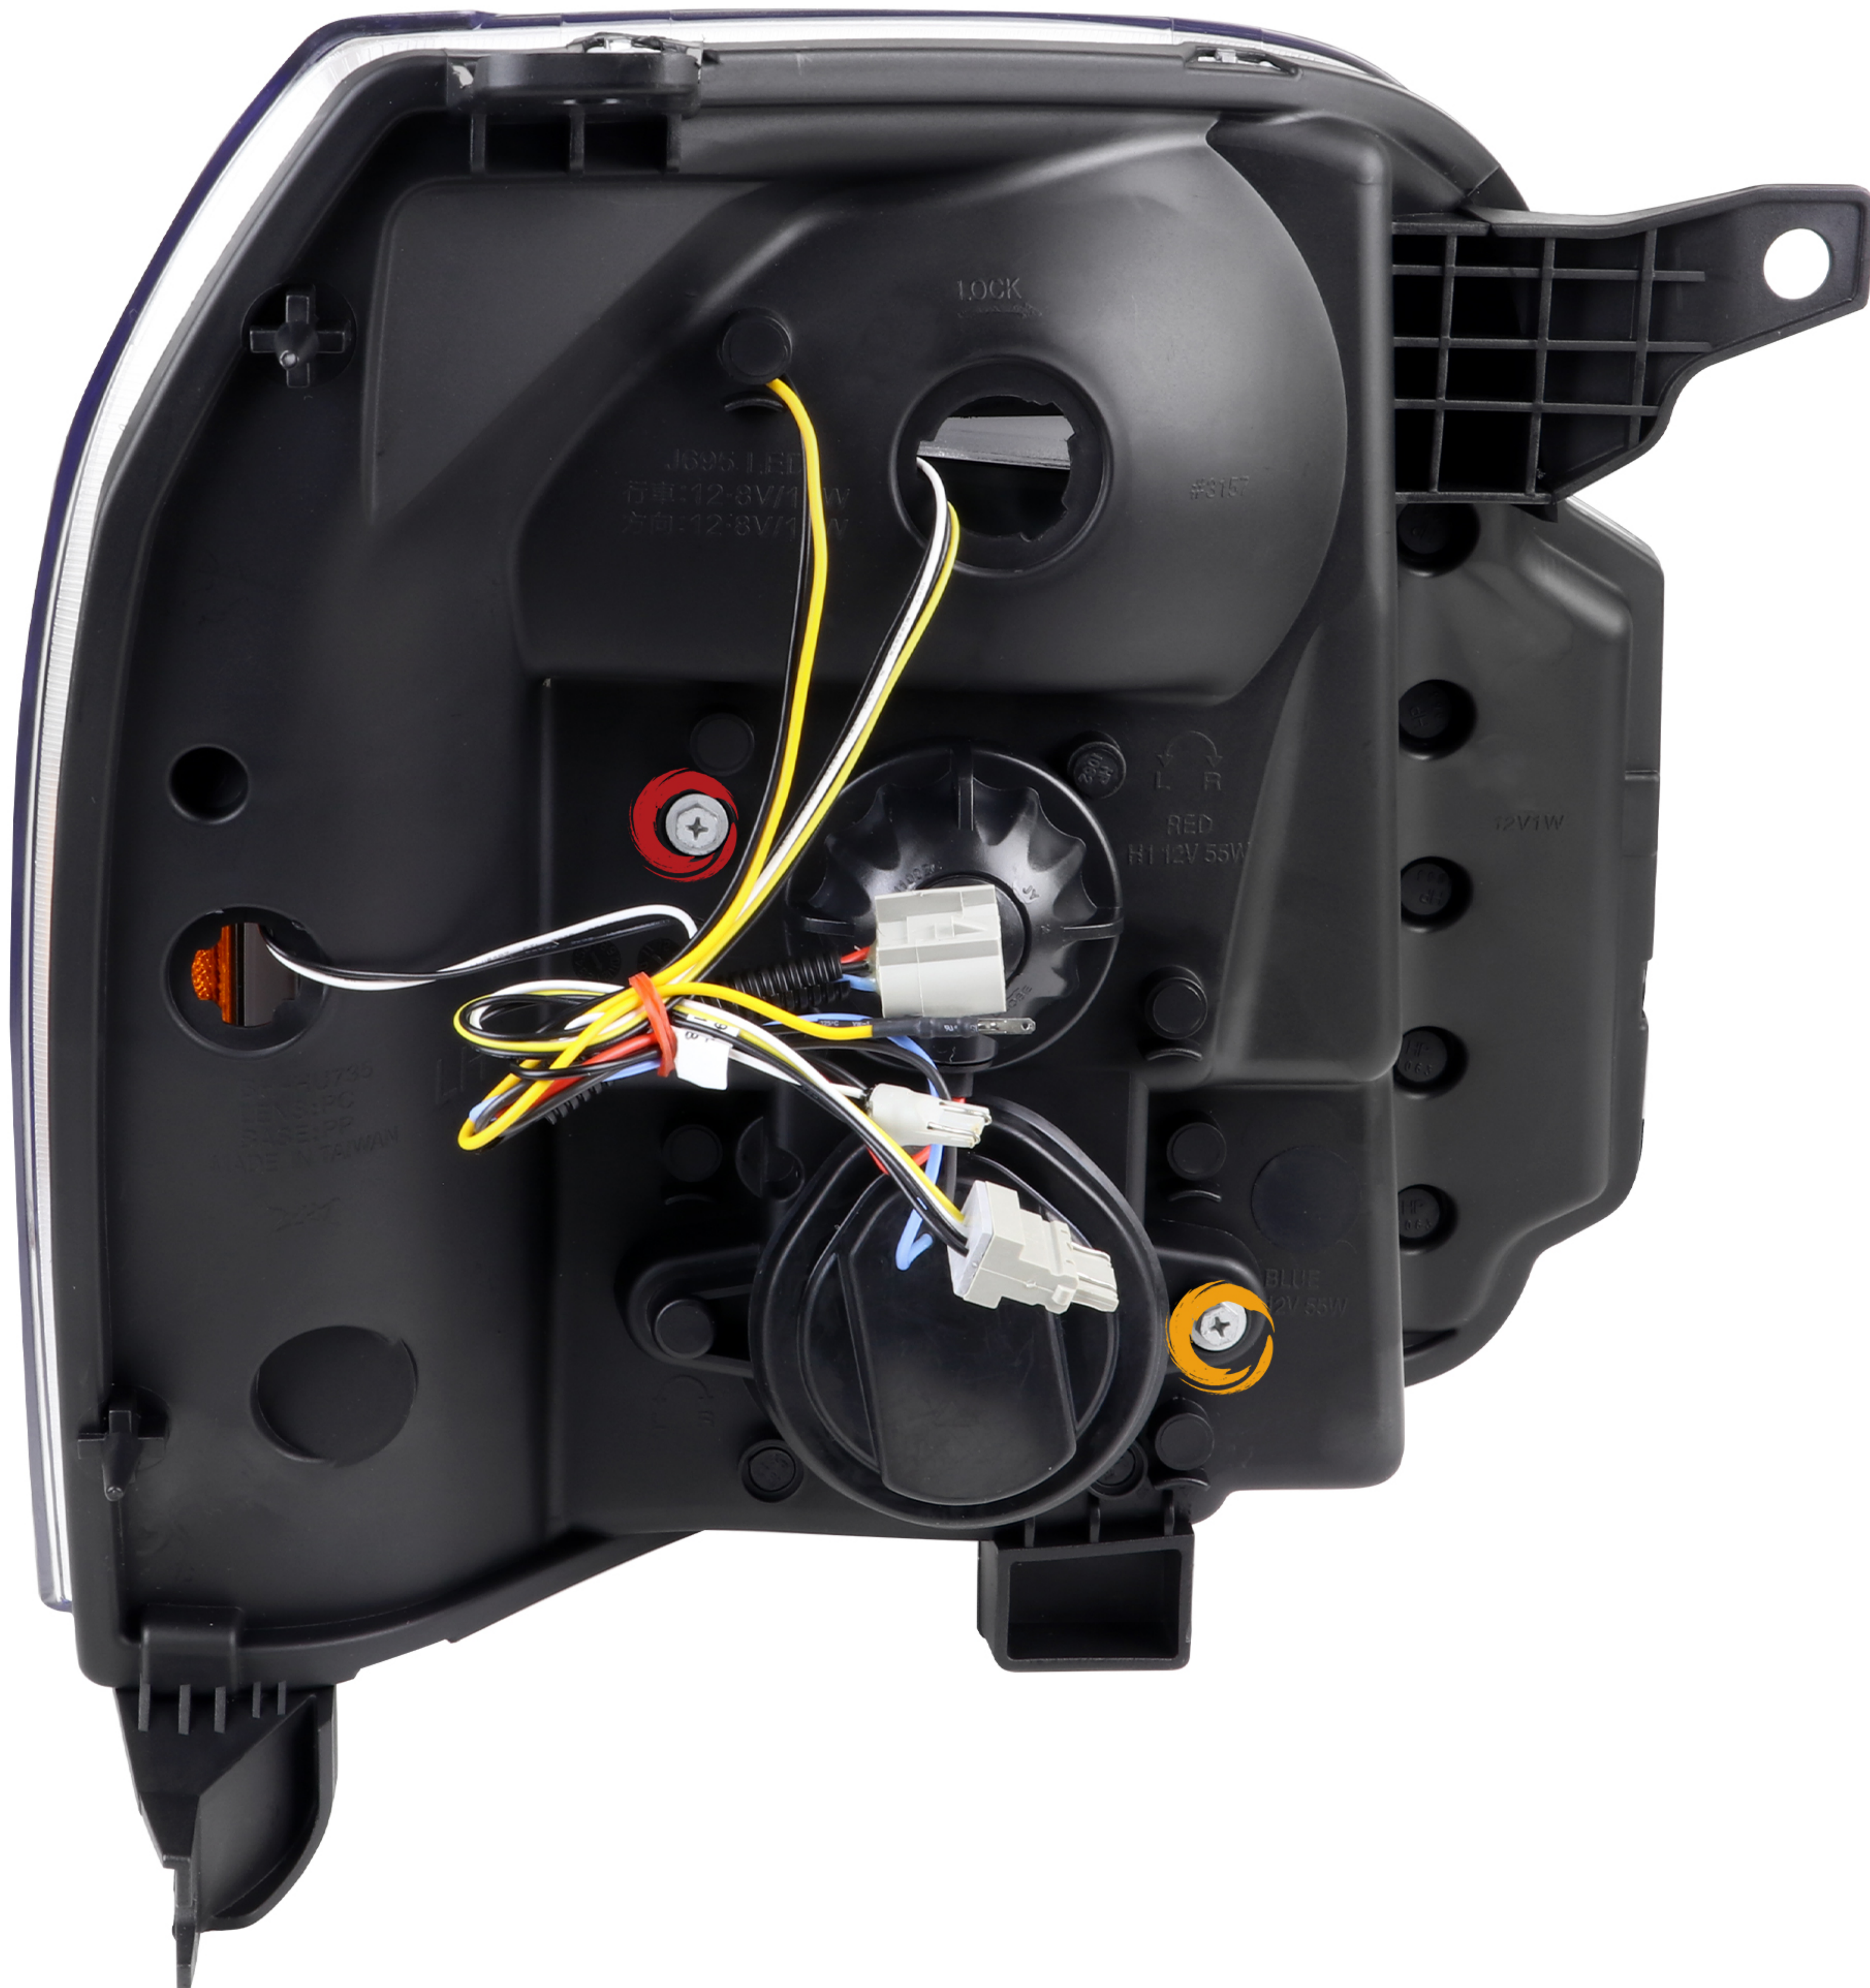

 HORIZONTAL BEAM ADJUSTER

 VERTICAL BEAM ADJUSTER