

SPEC-D *Tuning*

1993-1998 JEEP GRAND CHEROKEE 1PC PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

18mm Box End Wrench

Phillips Screwdriver

Vice Grip Locking Pliers

6mm Allen Wrench

Product Part Numbers:

2LHP-GKEE93-TM

2LHP-GKEE93JM-TM



1993-1998 JEEP GRAND CHEROKEE 1PC PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.


Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Phillips head screw location



2. Remove the phillips head screw

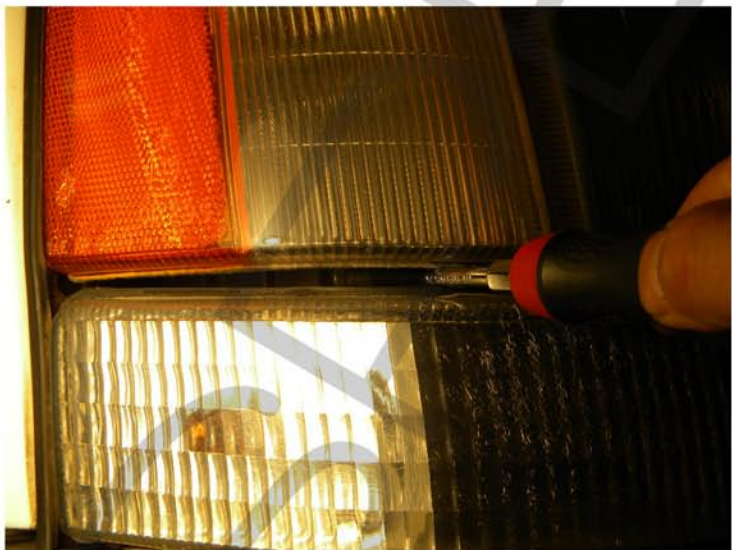

3. Remove the phillips head screw



4. Remove the corner light



5. Remove the light bulb socket



6. (2) phillips head screw locations



7. Remove the (2) phillips head screws



8. Remove the (2) phillips head screws



9. Remove the corner bumper light



10. Remove the light harnesses and sockets



11. Remove the light harnesses and sockets



12. Firmly tug on the headlight to remove



13. Unplug the headlight bulb



14. Adjustment screw location



15. Turn clockwise to detach the adjustment screw



16. Remove the adjustment screw

Please see the Halo and L.E.D installation instruction
If your headlights don't have HALO or L.E.D. You can skip it



17. Turn the adjustment screw until approximately 4 threads are visible




18. Turn the adjustment screw until approximately 4 threads are showing



19. Replace the adjustment screw



20. Turn counter clockwise to reattach the adjustment screw

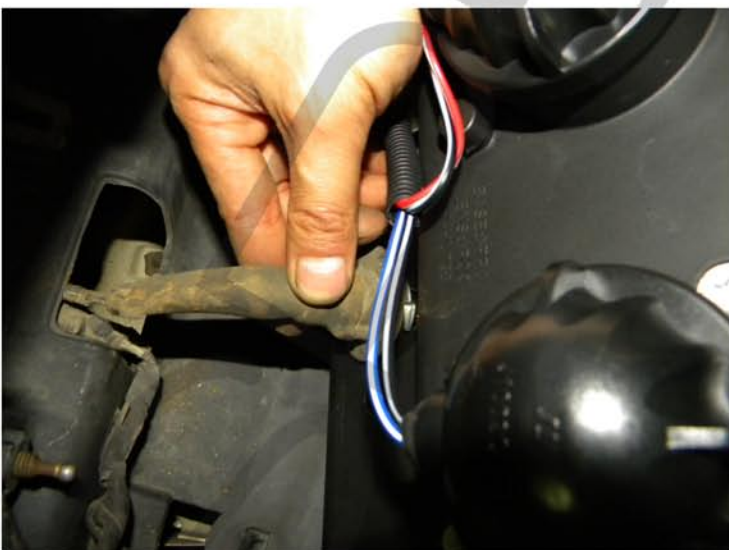

21. Attach the lighting harness to the projector headlight



22. Attach the lighting harness to Projector headlight



23. Attach the lighting harness to the projector headlight



24. Attach the lighting harness to the projector headlight




25. Attach the lighting harness to the projector headlight



26. Press firmly to attach the projector headlight onto the mounting screws



27. Please repeat the step in order from 1 to 27 for the opposite side

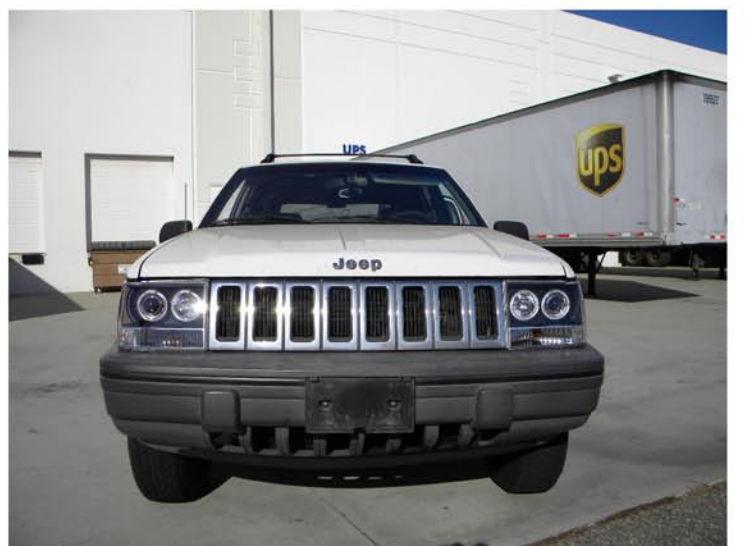

28. The installation is now complete