



SPYDER™

SKU# 5081919



SCAN THE QR CODE TO
VIEW THE INSTALL VIDEO

PACKAGE CONTENTS:



• 2X TAIL LIGHT ASSEMBLIES

FITMENT:

- 2003-2006 CHEVY SILVERADO 1500/2500
- 2007 CHEVY SILVERADO CLASSIC (DOES NOT FIT STEPSIDE)

- [FACEBOOK.COM/SPYDERAUTO](https://facebook.com/spyderauto)
- [LINKEDIN.COM/COMPANY/SPYDER-AUTO](https://linkedin.com/company/spyder-auto)
- [INSTAGRAM.COM/SPYDERAUTO](https://instagram.com/spyderauto)
- [TWITTER.COM/SPYDERAUTO](https://twitter.com/spyderauto)
- [TIKTOK.COM/@SPYDERAUTO](https://tiktok.com/@spyderauto)



SCAN THE QR CODE
TO VISIT OUR WEBSITE

WARNING: BY READING THIS DOCUMENT, YOU AGREE IT IS ONLY TO BE USED AS AN EDUCATIONAL GUIDE. SPYDER AUTO NOR ITS DEALERS MAKE GUARANTEES ON ANY FINISHED RESULTS, NOR ARE THEY TO BE HELD RESPONSIBLE FOR ANY DAMAGE, MISUSE, OR PERSONAL INJURIES. IF YOU ARE UNABLE TO CLEARLY UNDERSTAND AND ADAPT THE INFORMATION BELOW, PROFESSIONAL INSTALLATION IS RECOMMENDED. FOR ANY ISSUES OR QUESTIONS ABOUT YOUR SPYDER PRODUCT, REACH OUT TO OUR TECH SUPPORT TEAM TECHSUPPORT@SPYDERAUTO.COM. IT IS THE INSTALLER'S RESPONSIBILITY TO CONFIRM COMPLIANCE WITH STATE AND LOCAL LAWS. THIS PRODUCT CAN EXPOSE YOU TO CHEMICALS INCLUDING CHROMIUM (HEXAVALENT COMPOUNDS), WHICH ARE KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFETS OR OTHER REPRODUCTIVE HARM. FOR MORE INFORMATION GO TO WWW.P65WARNING.CA.GOV

TOOLS REQUIRED:

- PHILLIPS SCREWDRIVER



STEP 1:

DISCONNECT THE NEGATIVE BATTERY TERMINAL



STEP 2:
REMOVE (2X) PHILLIPS SCREWS.



STEP 3:
UNSEAT TAIL LIGHT



STEP 4:

REMOVE (4X) BULB SOCKETS FROM TAIL LIGHT. (NEVER TOUCH BULBS WITH BARE HANDS)




STEP 5:

REMOVE BRAKE, TURN SIGNAL AND SIDE MARKER BULB FROM SOCKETS.



STEP 6:

CONNECT THE TURN SIGNAL TO THE CENTER SOCKET AND THE BRAKE LAMP TO THE UPPER SOCKET. ENSURE THAT THE BLACK WIRES ALIGN WITH THE SOCKET

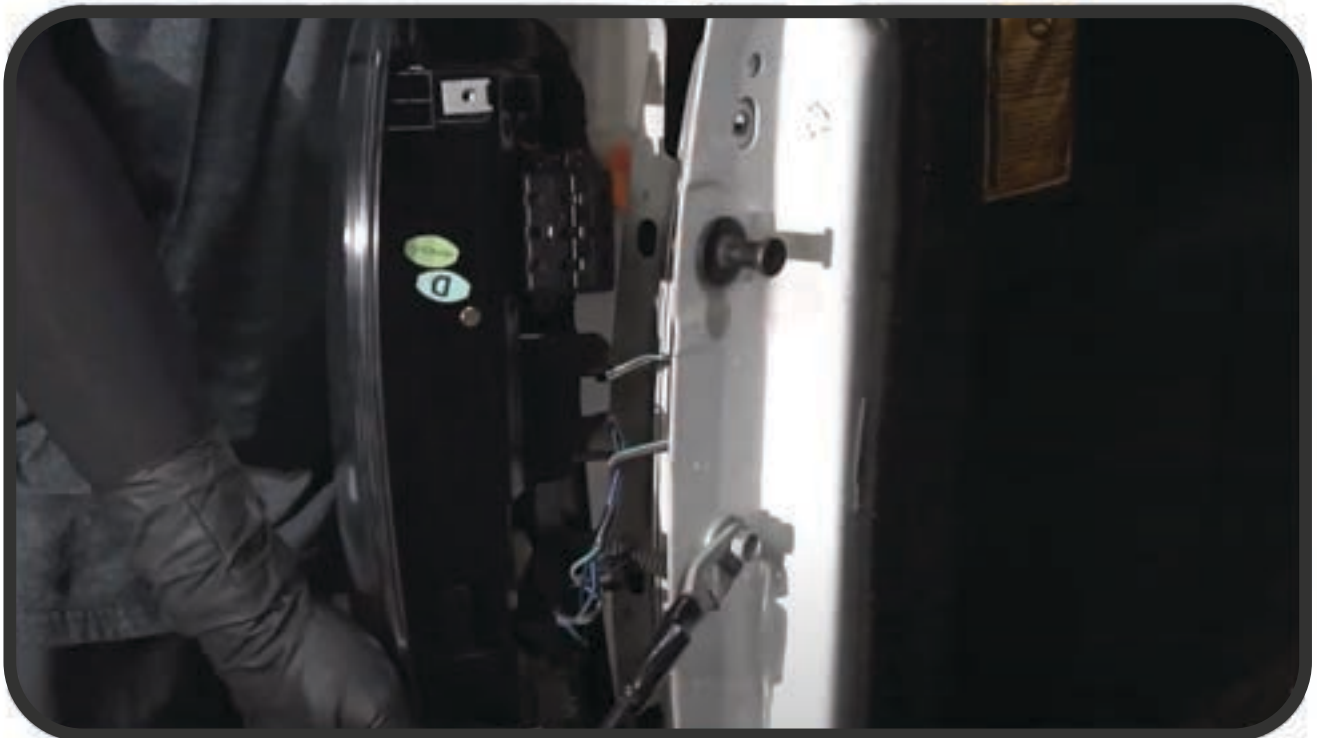

STEP 7:

REINSTALL ALL SOCKETS AND SEAT SPYDER TAIL LIGHT



STEP 8:
REINSTALL (2X) PHILLIPS SCREW SECURING TAIL LIGHT



STEP 9:
RECONNECT THE BATTERY AND TEST THE FUNCTIONS TO ENSURE THEY FUNCTION PROPERLY