



SPYDER™

SKU# 5083777



SCAN THE QR CODE TO
VIEW THE INSTALL VIDEO

PACKAGE CONTENTS:



• 2X TAIL LIGHT ASSEMBLIES

FITMENT:

- 2016-2018 GMC SIERRA 1500
- 2016-2019 GMC SIERRA 2500/3500 HD

(WILL ONLY FIT FACTORY LED MODELS)

- [FACEBOOK.COM/SPYDERAUTO](https://facebook.com/spyderauto)
- [LINKEDIN.COM/COMPANY/SPYDER-AUTO](https://linkedin.com/company/spyder-auto)
- [INSTAGRAM.COM/SPYDERAUTO](https://instagram.com/spyderauto)
- [TWITTER.COM/SPYDERAUTO](https://twitter.com/spyderauto)
- [TIKTOK.COM/@SPYDERAUTO](https://tiktok.com/@spyderauto)




SCAN THE QR CODE
TO VISIT OUR WEBSITE

WARNING: BY READING THIS DOCUMENT, YOU AGREE IT IS ONLY TO BE USED AS AN EDUCATIONAL GUIDE. SPYDER AUTO NOR ITS DEALERS MAKE GUARANTEES ON ANY FINISHED RESULTS, NOR ARE THEY TO BE HELD RESPONSIBLE FOR ANY DAMAGE, MISUSE, OR PERSONAL INJURIES. IF YOU ARE UNABLE TO CLEARLY UNDERSTAND AND ADAPT THE INFORMATION BELOW, PROFESSIONAL INSTALLATION IS RECOMMENDED. FOR ANY ISSUES OR QUESTIONS ABOUT YOUR SPYDER PRODUCT, REACH OUT TO OUR TECH SUPPORT TEAM TECHSUPPORT@SPYDERAUTO.COM. IT IS THE INSTALLER'S RESPONSIBILITY TO CONFIRM COMPLIANCE WITH STATE AND LOCAL LAWS. THIS PRODUCT CAN EXPOSE YOU TO CHEMICALS INCLUDING CHROMIUM (HEXAVALENT COMPOUNDS), WHICH ARE KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFETS OR OTHER REPRODUCTIVE HARM. FOR MORE INFORMATION GO TO WWW.P65WARNING.CA.GOV

TOOLS REQUIRED:

- RATCHET
- T15 TORX SOCKET

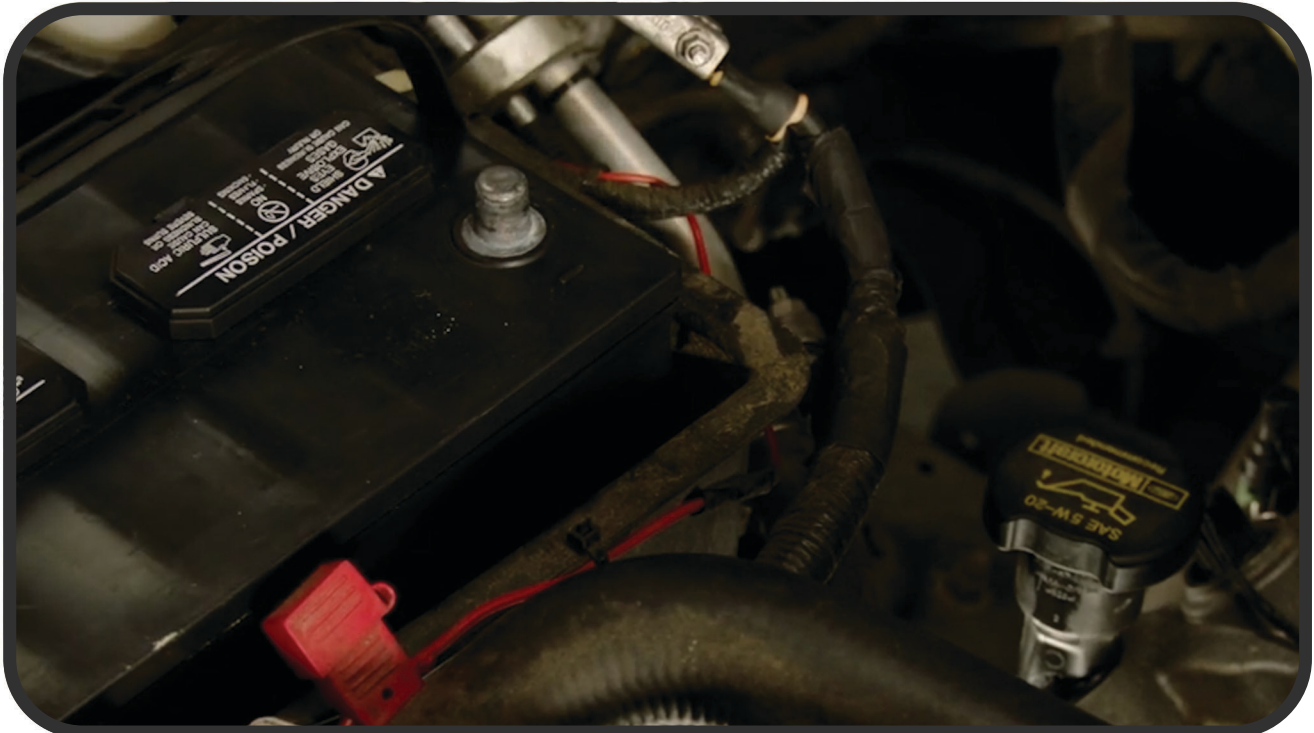


STEP 1:
DISCONNECT THE NEGATIVE BATTERY TERMINAL



STEP 2:
REMOVE (2) T15 TORX SCREWS



STEP 3:
UNSEAT THE TAIL LIGHT

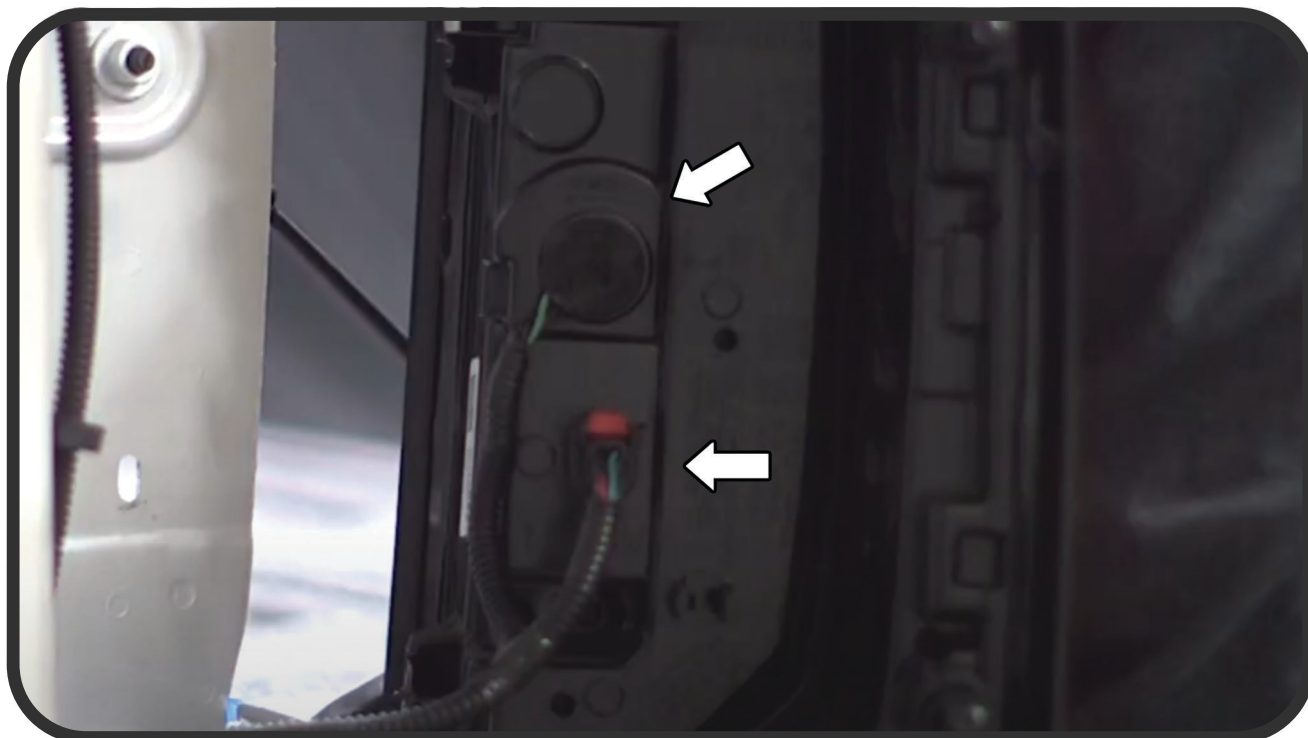

STEP 4:

REMOVE THE TAIL LIGHT REVERSE SOCKET AND THE TAIL LIGHT HARNESS

(NOTE: NEVER TOUCH BULB WITH BARE HANDS)



STEP 5:


CONNECT THE TAIL LIGHT HARNESS TO THE SPYDER TAIL LIGHT



STEP 6:
INSTALL REVERSE LIGHT SOCKET TO THE SPYDER TAIL LIGHT



STEP 7:
SEAT THE SPYDER TAIL LIGHT

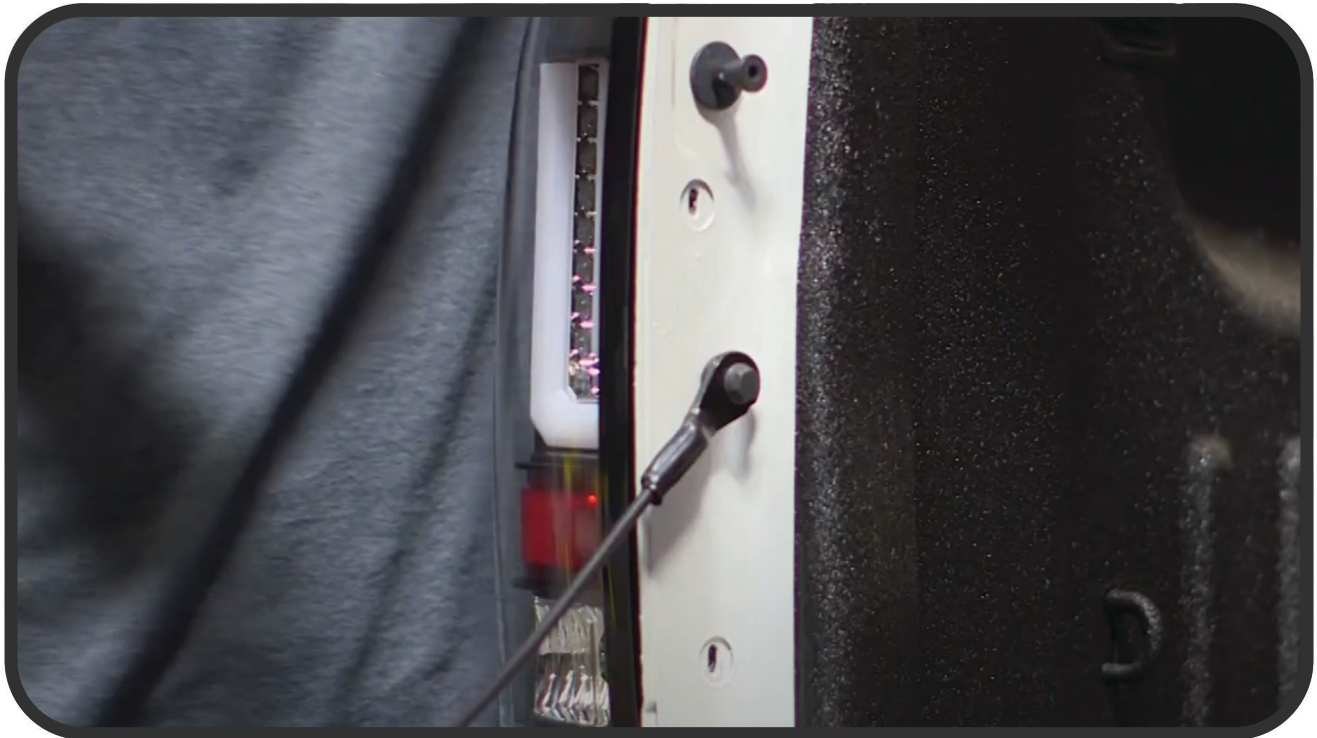

STEP 8:

REINSTALL THE (2) T15 TORX SCREWS TO SECURE THE TAIL LIGHT



STEP 9:

RECONNECT THE BATTERY AND TEST THE FUNCTIONS TO ENSURE THEY FUNCTION PROPERLY