



# PRODUCT DATA SHEET

## New Generation™ Wheel Bearing Grease for Disc and Drum Brakes, 14 Wt Oz

Part Number: SL3110

### Product Description

A premium lithium complex NLGI grade 2 grease with drop point of over 500° F. This grease is designed for late model vehicles wheel bearings, chassis, suspension & u-joints. Wide temperature range -40°F to 325°F. Extreme pressure additives.

### Applications

Automotive applications, ball joints, bearings, chassis points, construction ball & roller bearings, conveyor bearings, disc-brake systems, farm equipment, guides, mining applications, press rolls, roller bearings, slides, wheel bearings

### Unit Package Description

14 Ounce Cartridge

### Brand

Sta-Lube

### Generic Description 1

Wheel Bearing Grease

### Net Fill

14 Wt Oz

### UPC Code

072213311006

### Unit Dimensions

9.31H x 2.13W x 2.13D in

### Units Per Case

10

### Case Dimensions

9.5H x 4.5W x 11.38D in

### Cases Per Pallet

150

### Case Weight

11 lbs

### I 2 of 5 Code

30072213311007

### Appearance

Amber Semi-Solid to Solid Grease

### Base Type

Lithium Complex

### Flash point (F)

450°F

### Flash point (C)

232.22°C

### Flammability Class - CPSC

None

### Spec Gravity Concentrate

0.9 at 60°F

### NLGI Grade


2

### Timken OK Load [Lbs.]

50 Lbs

### Plastic Safe

Not Determined

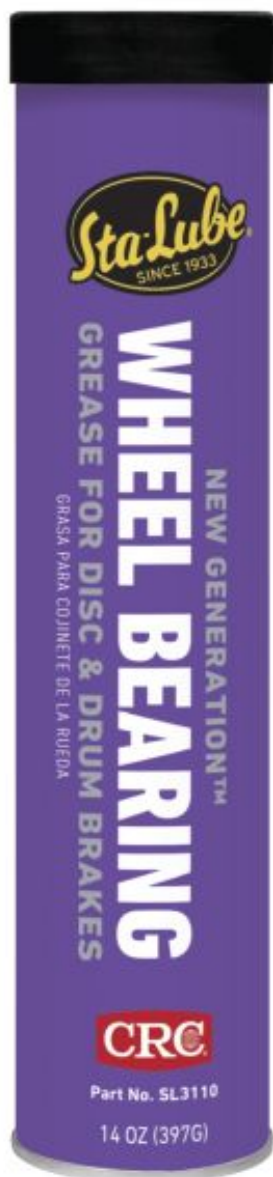

Last revised: 5/4/2016  
Page 1 of 2



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET

Evaporation Rate	<1 (butyl acetate=1)
Working Temp (F)	-40 to 325°F
Working Temp (C)	-40 to 163°C
4 Ball EP	250 KG Weld,45 LWI
4 Ball Wear	0.6 mm
Drop Point	500°F
Leakage	6
Low Temp Torque	15.5 Max
Oil Separation	3.5
Oxidation Stability	5
Pour Point (F)	Not Determined
Pour Point (C)	Not Determined
ISO Viscosity Grade	150
Water Washout	7
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
VOC % (Federal)	1
VOC g/L (Federal)	9
VOC Lbs./Gal. (Federal)	0.075
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

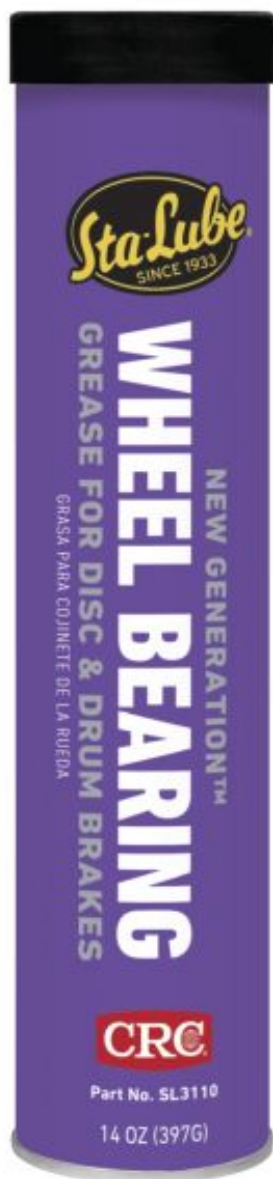

Last revised: 5/4/2016  
Page 2 of 2



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.