

12V/24V STARTER & DEEP CYCLE

Optimate 7 12-24V

**For 12V & 24V batteries
with accurate temperature
controlled charging**

**TM-260
UK: TM-262**



Select 12V 10A / 24V 5A modes

Temperature compensated charging

Ampmatic : adjusts to any battery size

SAFE! Selected voltage must match battery

WEATHERPROOF CASE
with WALL MOUNTS
❄️ 'ARCTIC' CABLE

1

Voltage
Selection

2

Automatic
Protection

3

TEST
before
CHARGE

4

Low Volt
Pulse SAVE

5

Controlled
CHARGE

6



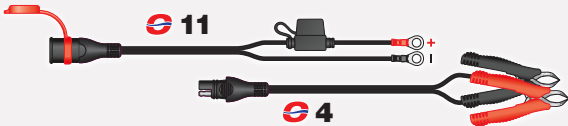
OPTIMIZE

7

TEST after
CHARGE

8

OptiMate
maintenance

CHARGING AMPS	10A Ampmatic @ 12V / 5A @ 24V
USE	INDOOR / OUTDOOR ❄️ t°min: -40°C
SAVE	Low Volt start 0.5V (12V) + 1 Step desulfation recovery
IDEAL FOR	  3 - 400Ah (12V) / 3 - 200Ah (24V)
CABLE ACCESSORIES	 11 4