

SPORT ROOF RACK FOR 2024+ TOYOTA TACOMA



CUSTOMER INFORMATION

The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers." **USE AND CARE,** Check the roof rail mounting bolts frequently, and re-tighten if necessary.

WARNING


IT IS CRITICAL THAT ALL PRODUCTS BE PROPERLY AND SECURELY ASSEMBLED AND ATTACHED TO YOUR VEHICLE. IMPROPER ATTACHMENT COULD RESULT IN AN AUTOMOBILE ACCIDENT, AND COULD CAUSE SERIOUS BODILY INJURY OR DEATH. YOU ARE RESPONSIBLE FOR ASSEMBLING AND SECURING PRODUCTS TO YOUR VEHICLE, CHECKING THE ATTACHMENTS PRIOR TO USE, AND PERIODICALLY INSPECTING THE PRODUCTS FOR ADJUSTMENT, WEAR AND DAMAGE. THEREFORE, YOU MUST READ AND UNDERSTAND ALL OF THE INSTRUCTIONS AND PRECAUTIONS SUPPLIED WITH YOUR PRODUCT PRIOR TO INSTALLATION OR USE. IF YOU DO NOT UNDERSTAND ALL OF THE INSTRUCTIONS AND CAUTIONS, OR IF YOU HAVE NO MECHANICAL EXPERIENCE AND ARE NOT THOROUGHLY FAMILIAR WITH THE INSTALLATION PROCEDURES, YOU SHOULD HAVE THE PRODUCT INSTALLED BY A PROFESSIONAL INSTALLER OR OTHER QUALIFIED PERSONNEL.

NOTE: we will not be responsible for any damage caused by the failure to install the product according to these instructions. Please contact us if you have any questions about the installation of this product.

1 Parts List 1


quantity		name
A	x 2	Side Rail
B	x 4	Rubber Pad(FL,FR,RL,RR)
C	x 4	Cover(FL,FR,RL,RR)
D	x 4	Front Foam Pad For PositioningMiddle Rubber
E	x 4	Rear Foam Pad For Positioning Middle Rubber
F	x 8	M6X50MM TORX SCREWS
G	x 2	Intermediate strip
H	x 8	6*14 washer
I	x 1	T30 Wrench
J	x 1	4mm hex key
K	x 1	clip-driver
L	x 1	sealant
M	x 1	Knob Power Wrench

Figure1.1

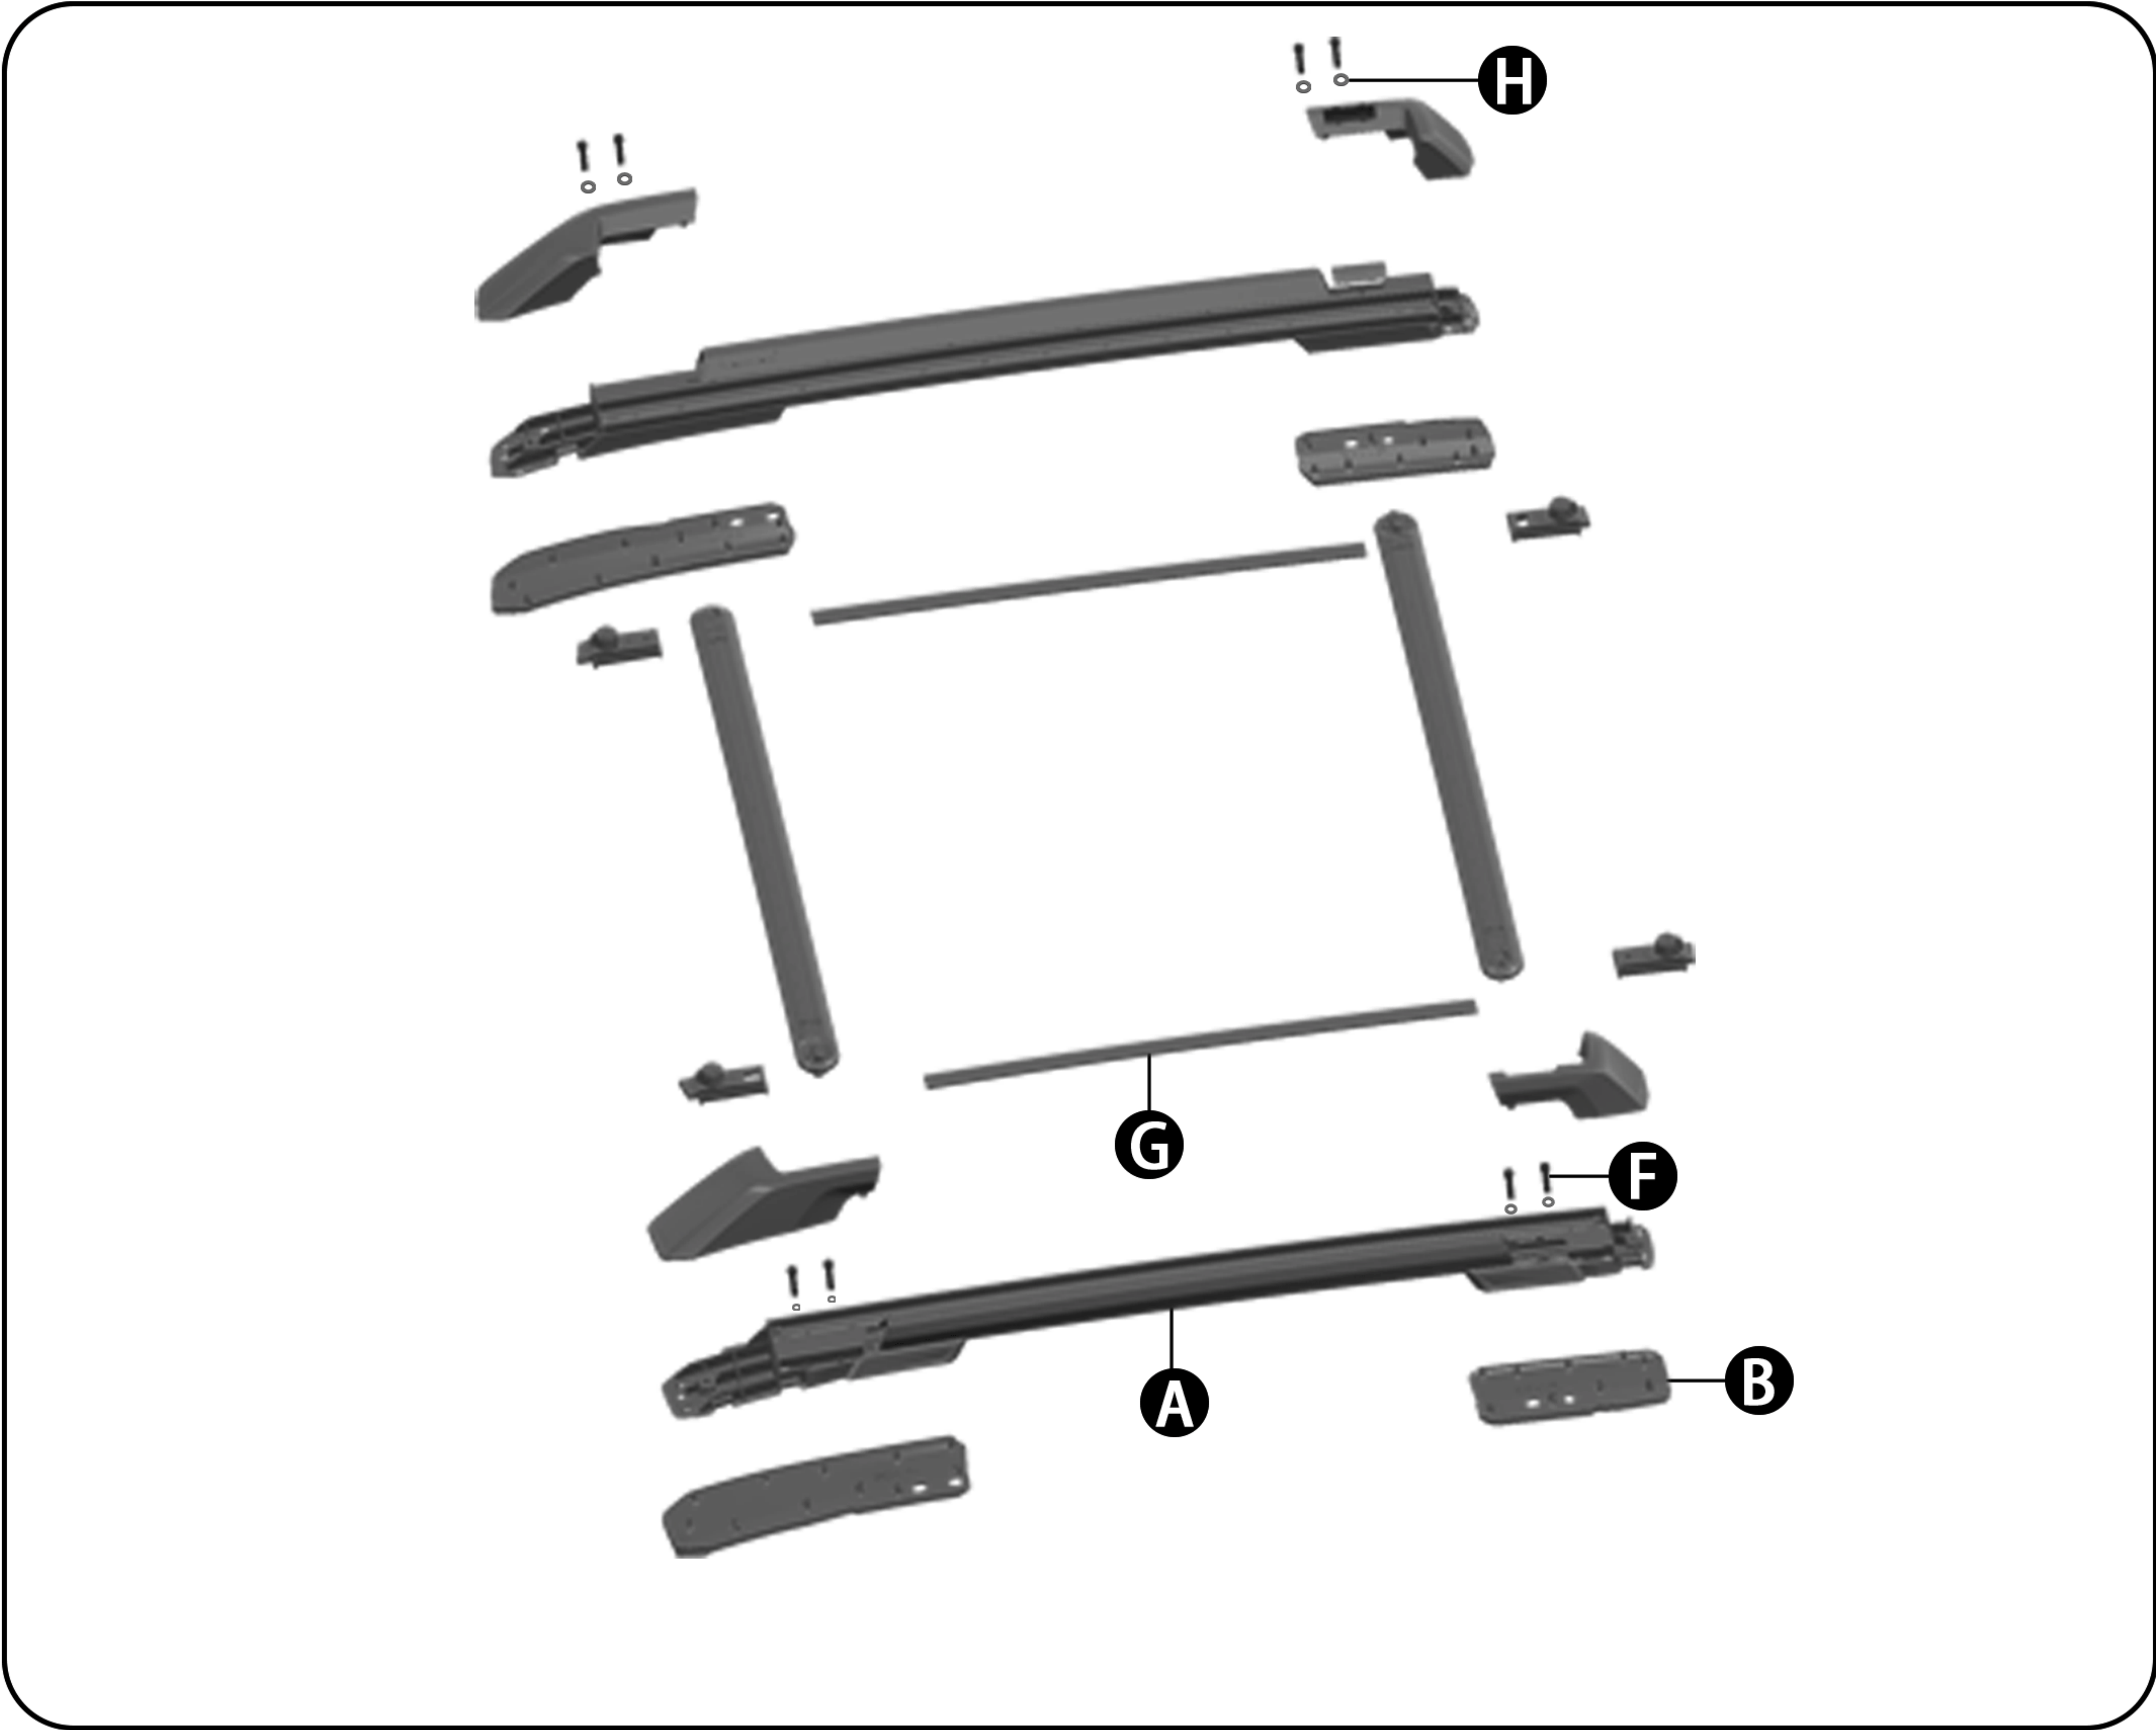


2 INSTALLATION STEPS

Figure 2.1

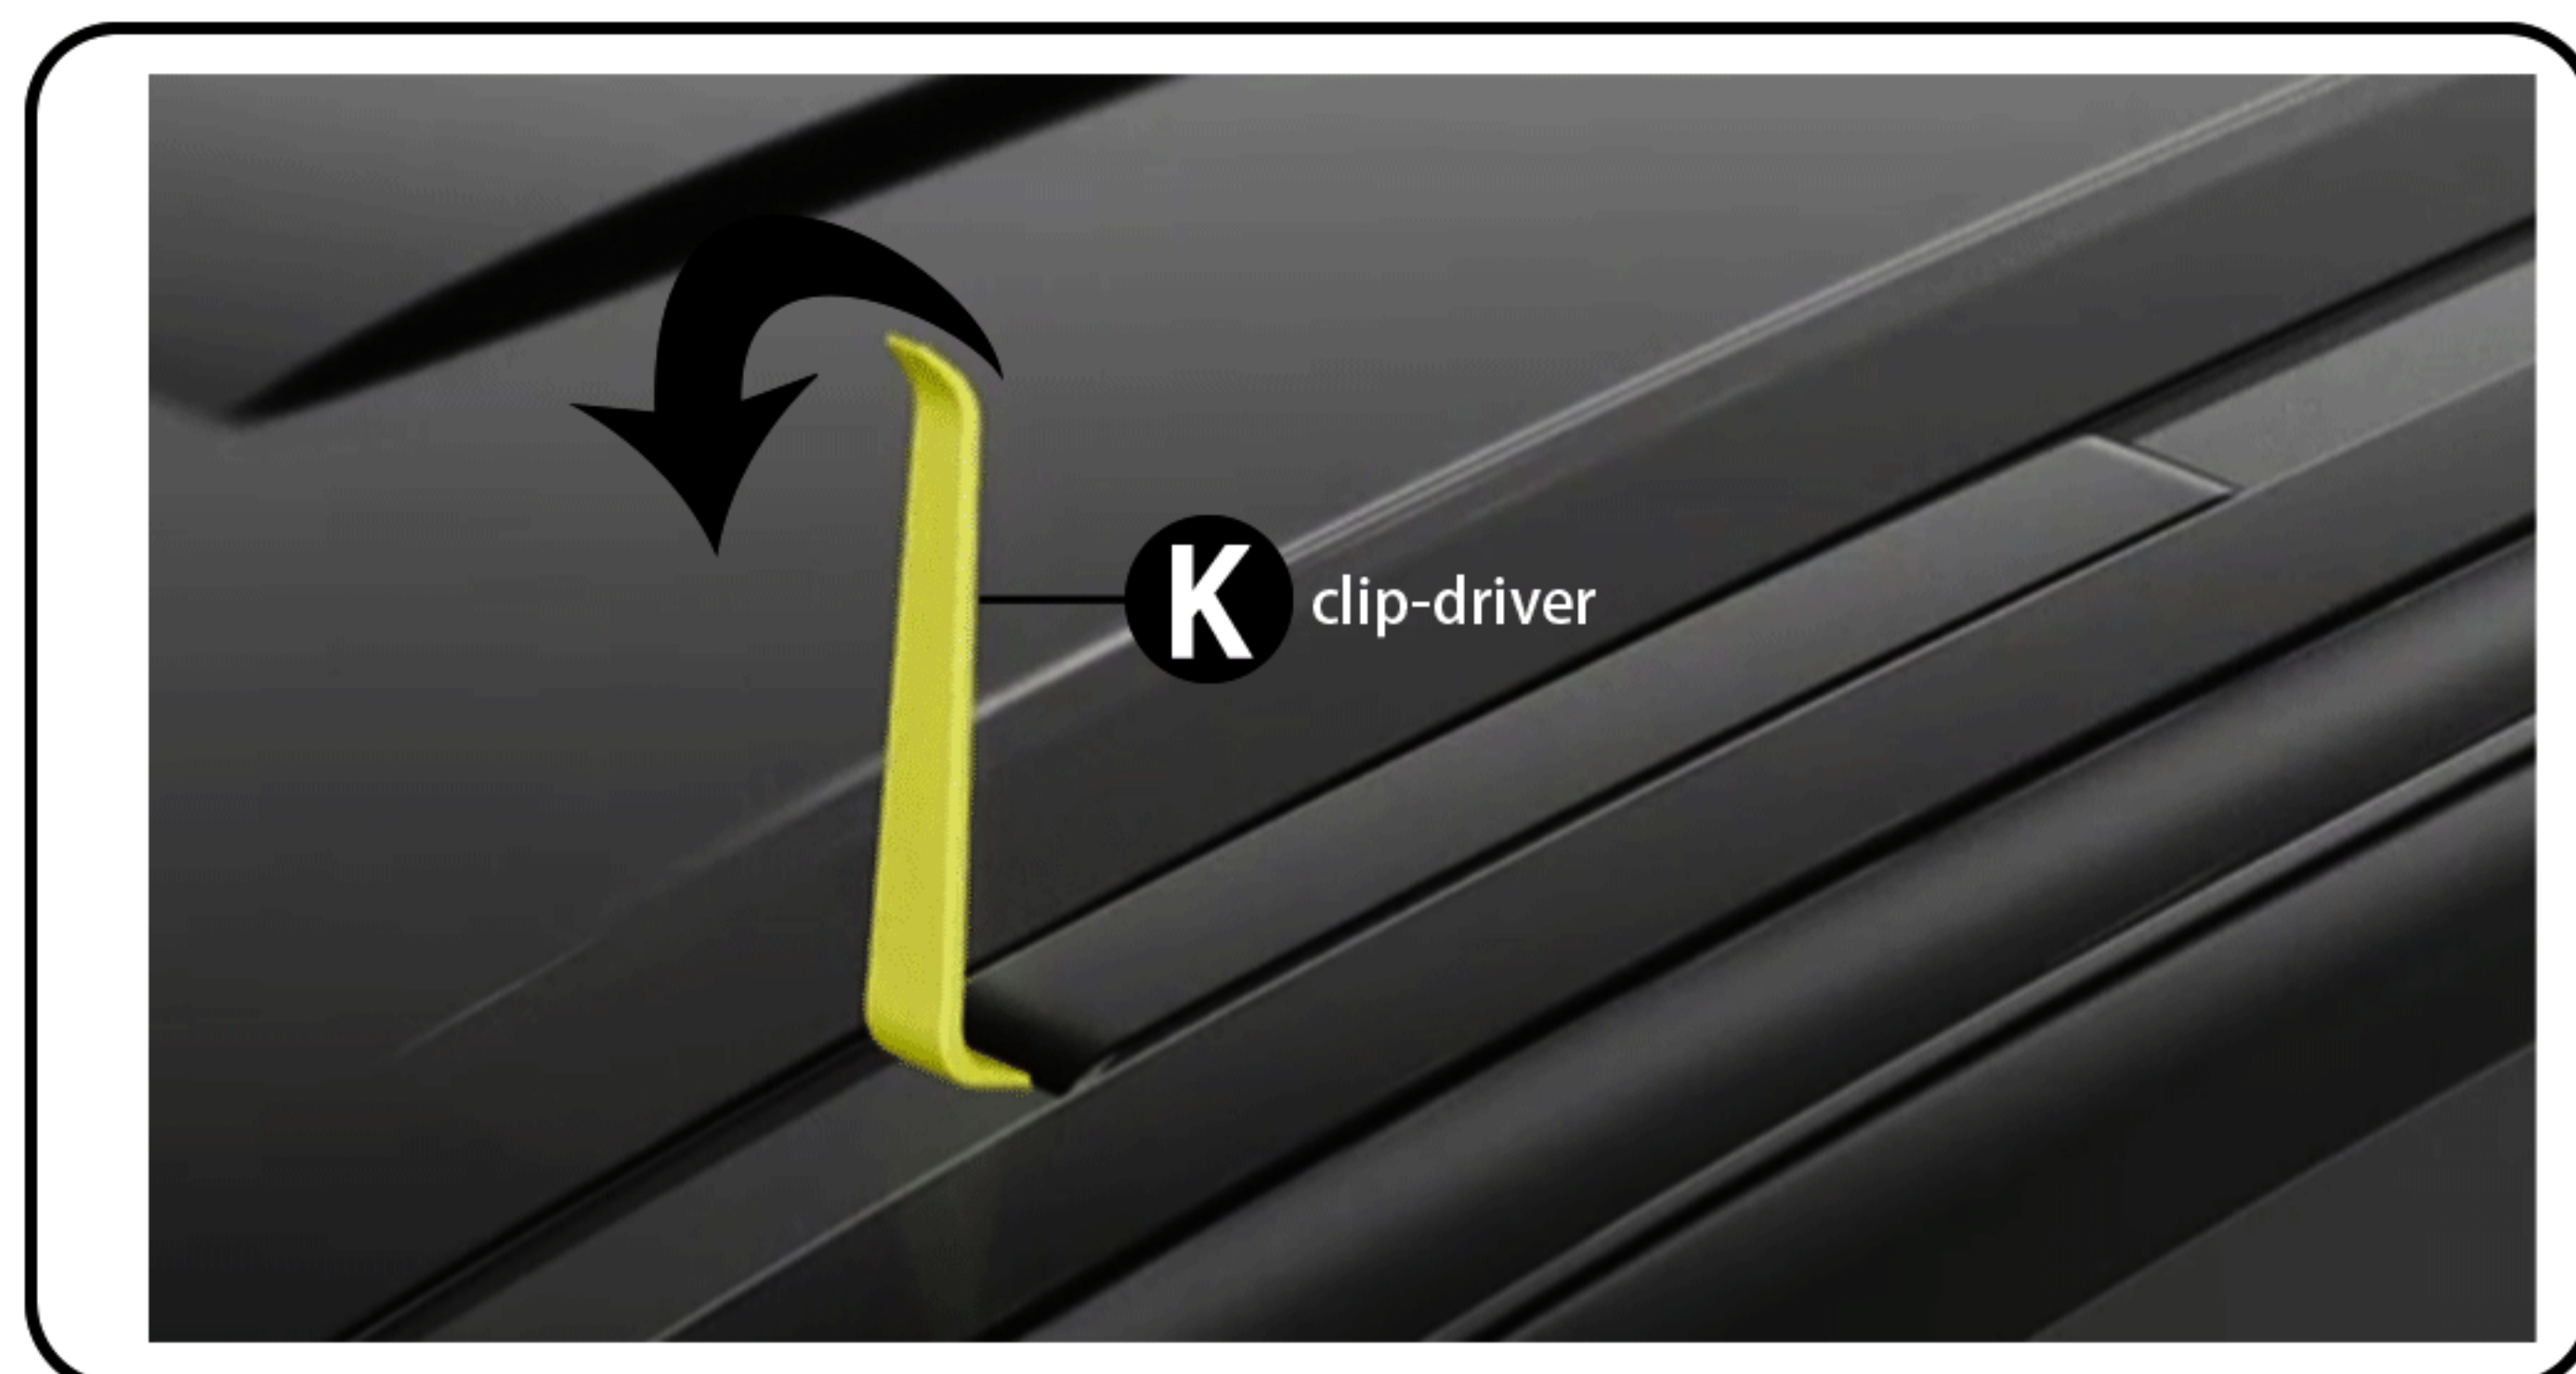

Remove the original roof cover

Figure 2.2

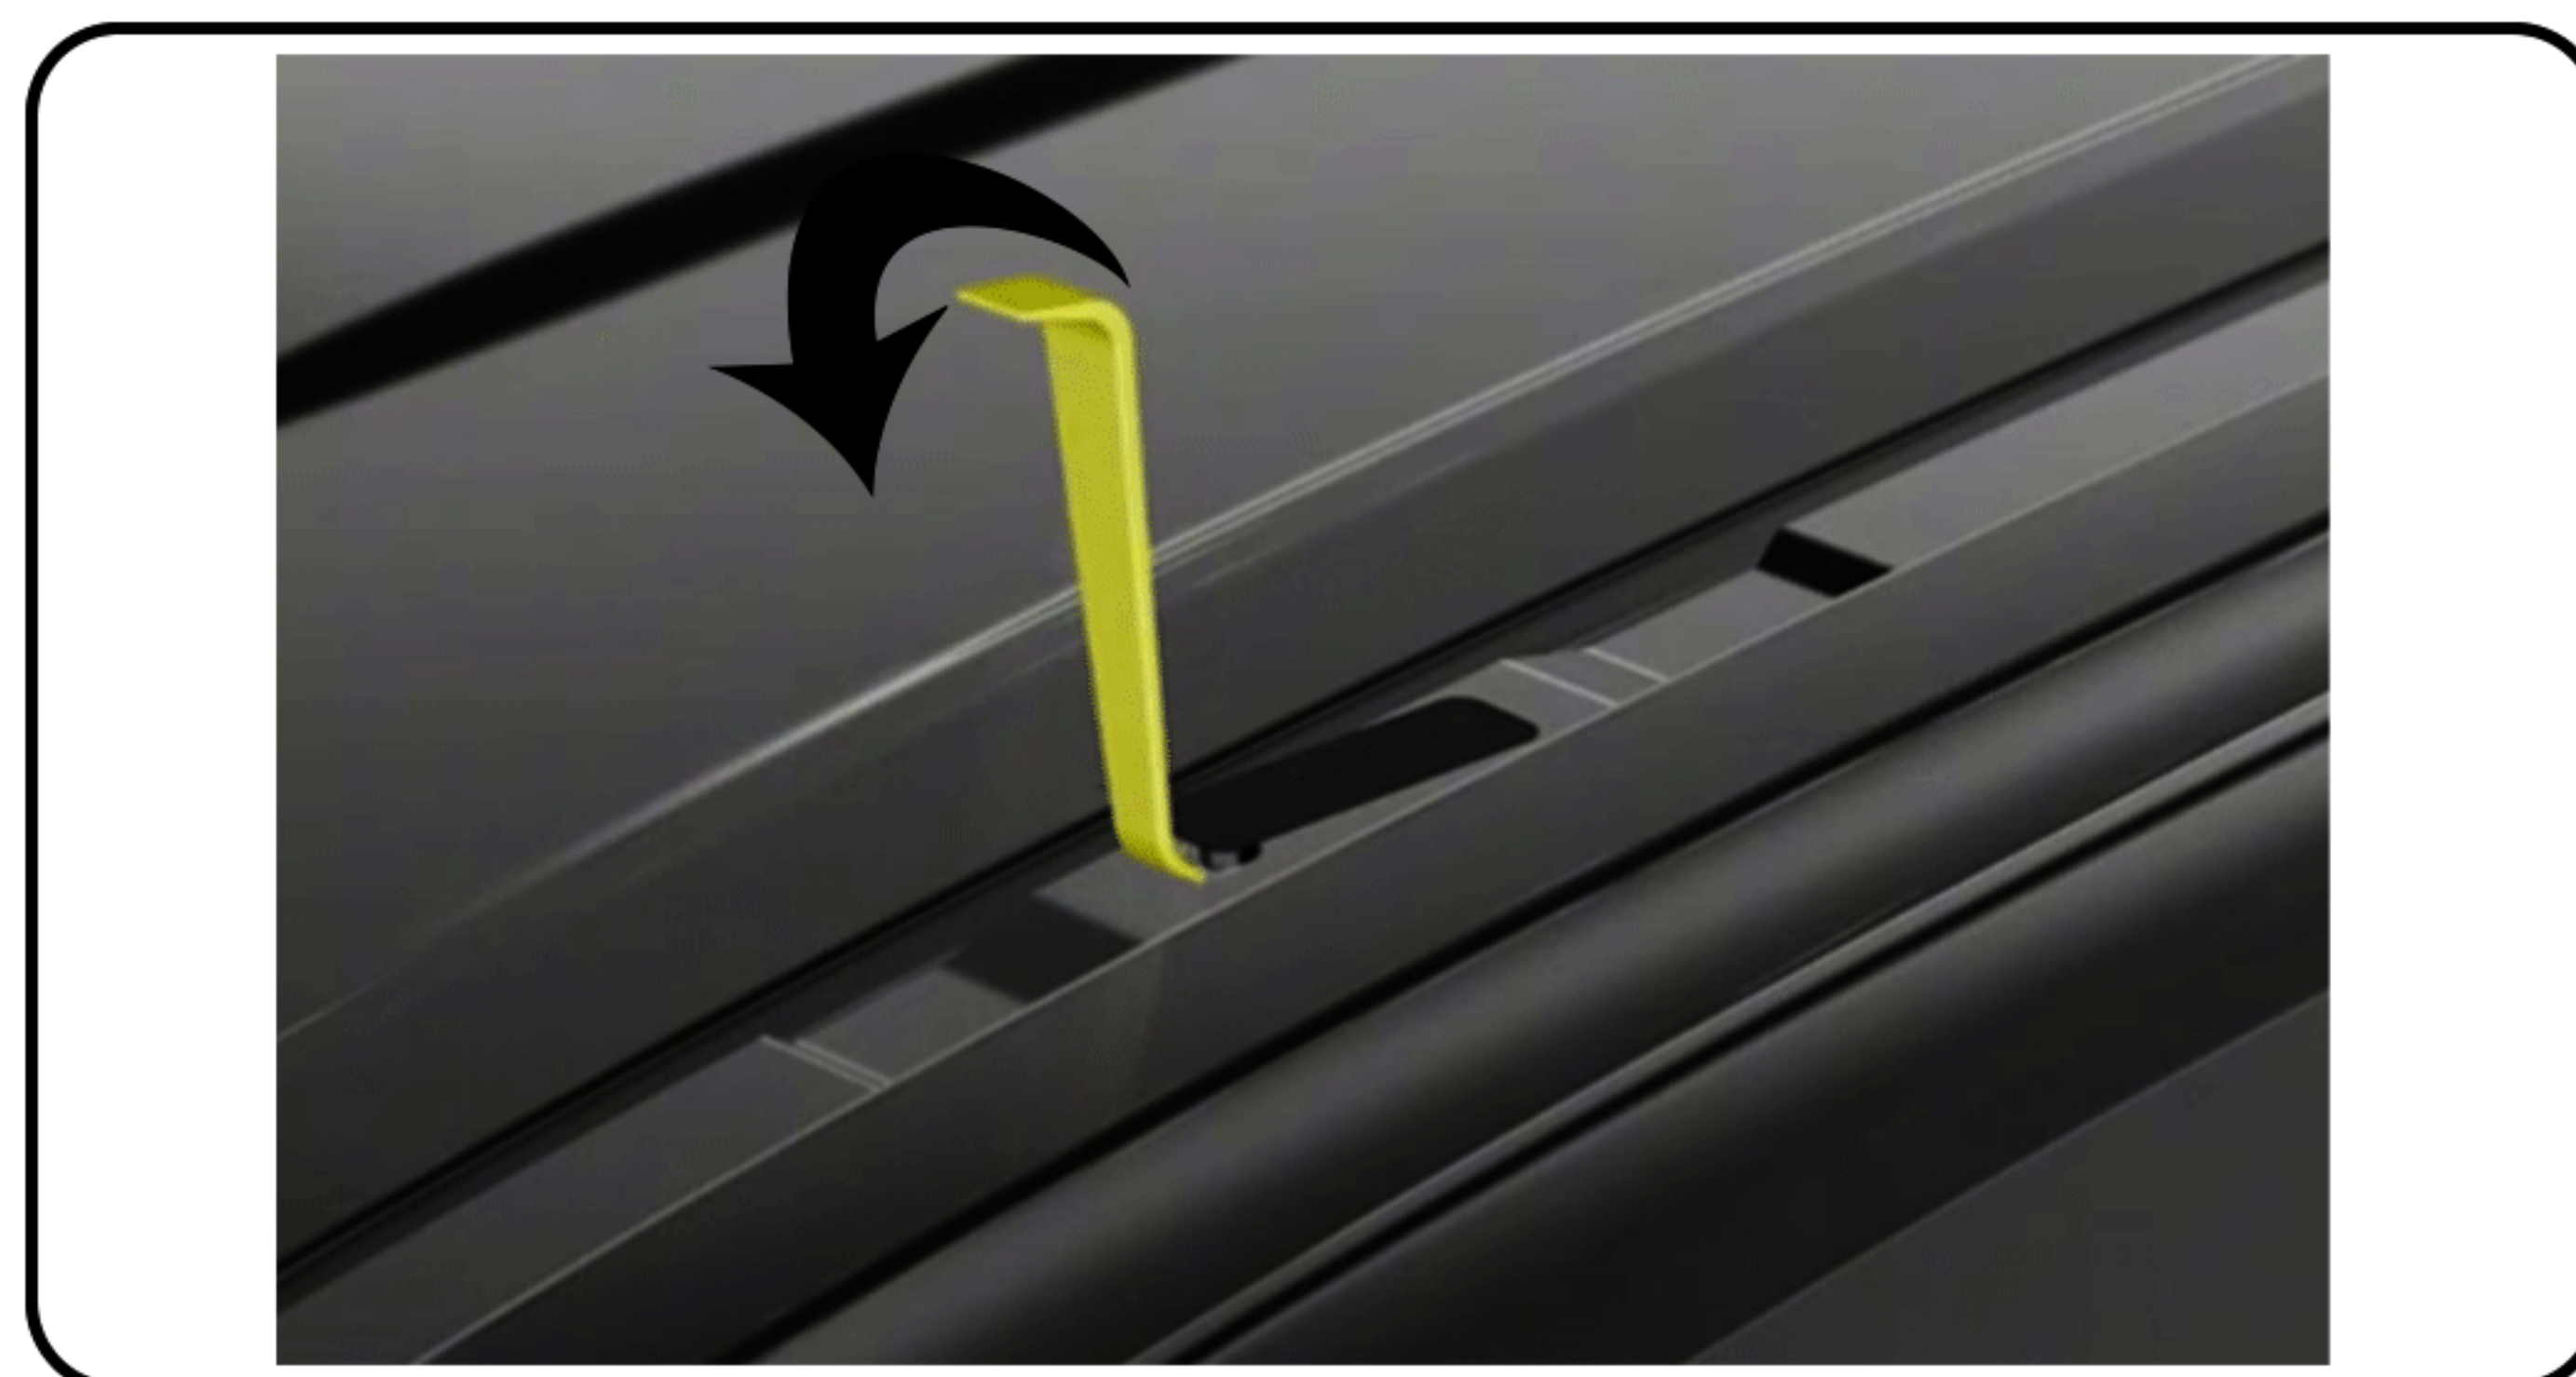


Remove the adhesive from the original car

Figure 2.3




Disassembly complete

Figure 2.4

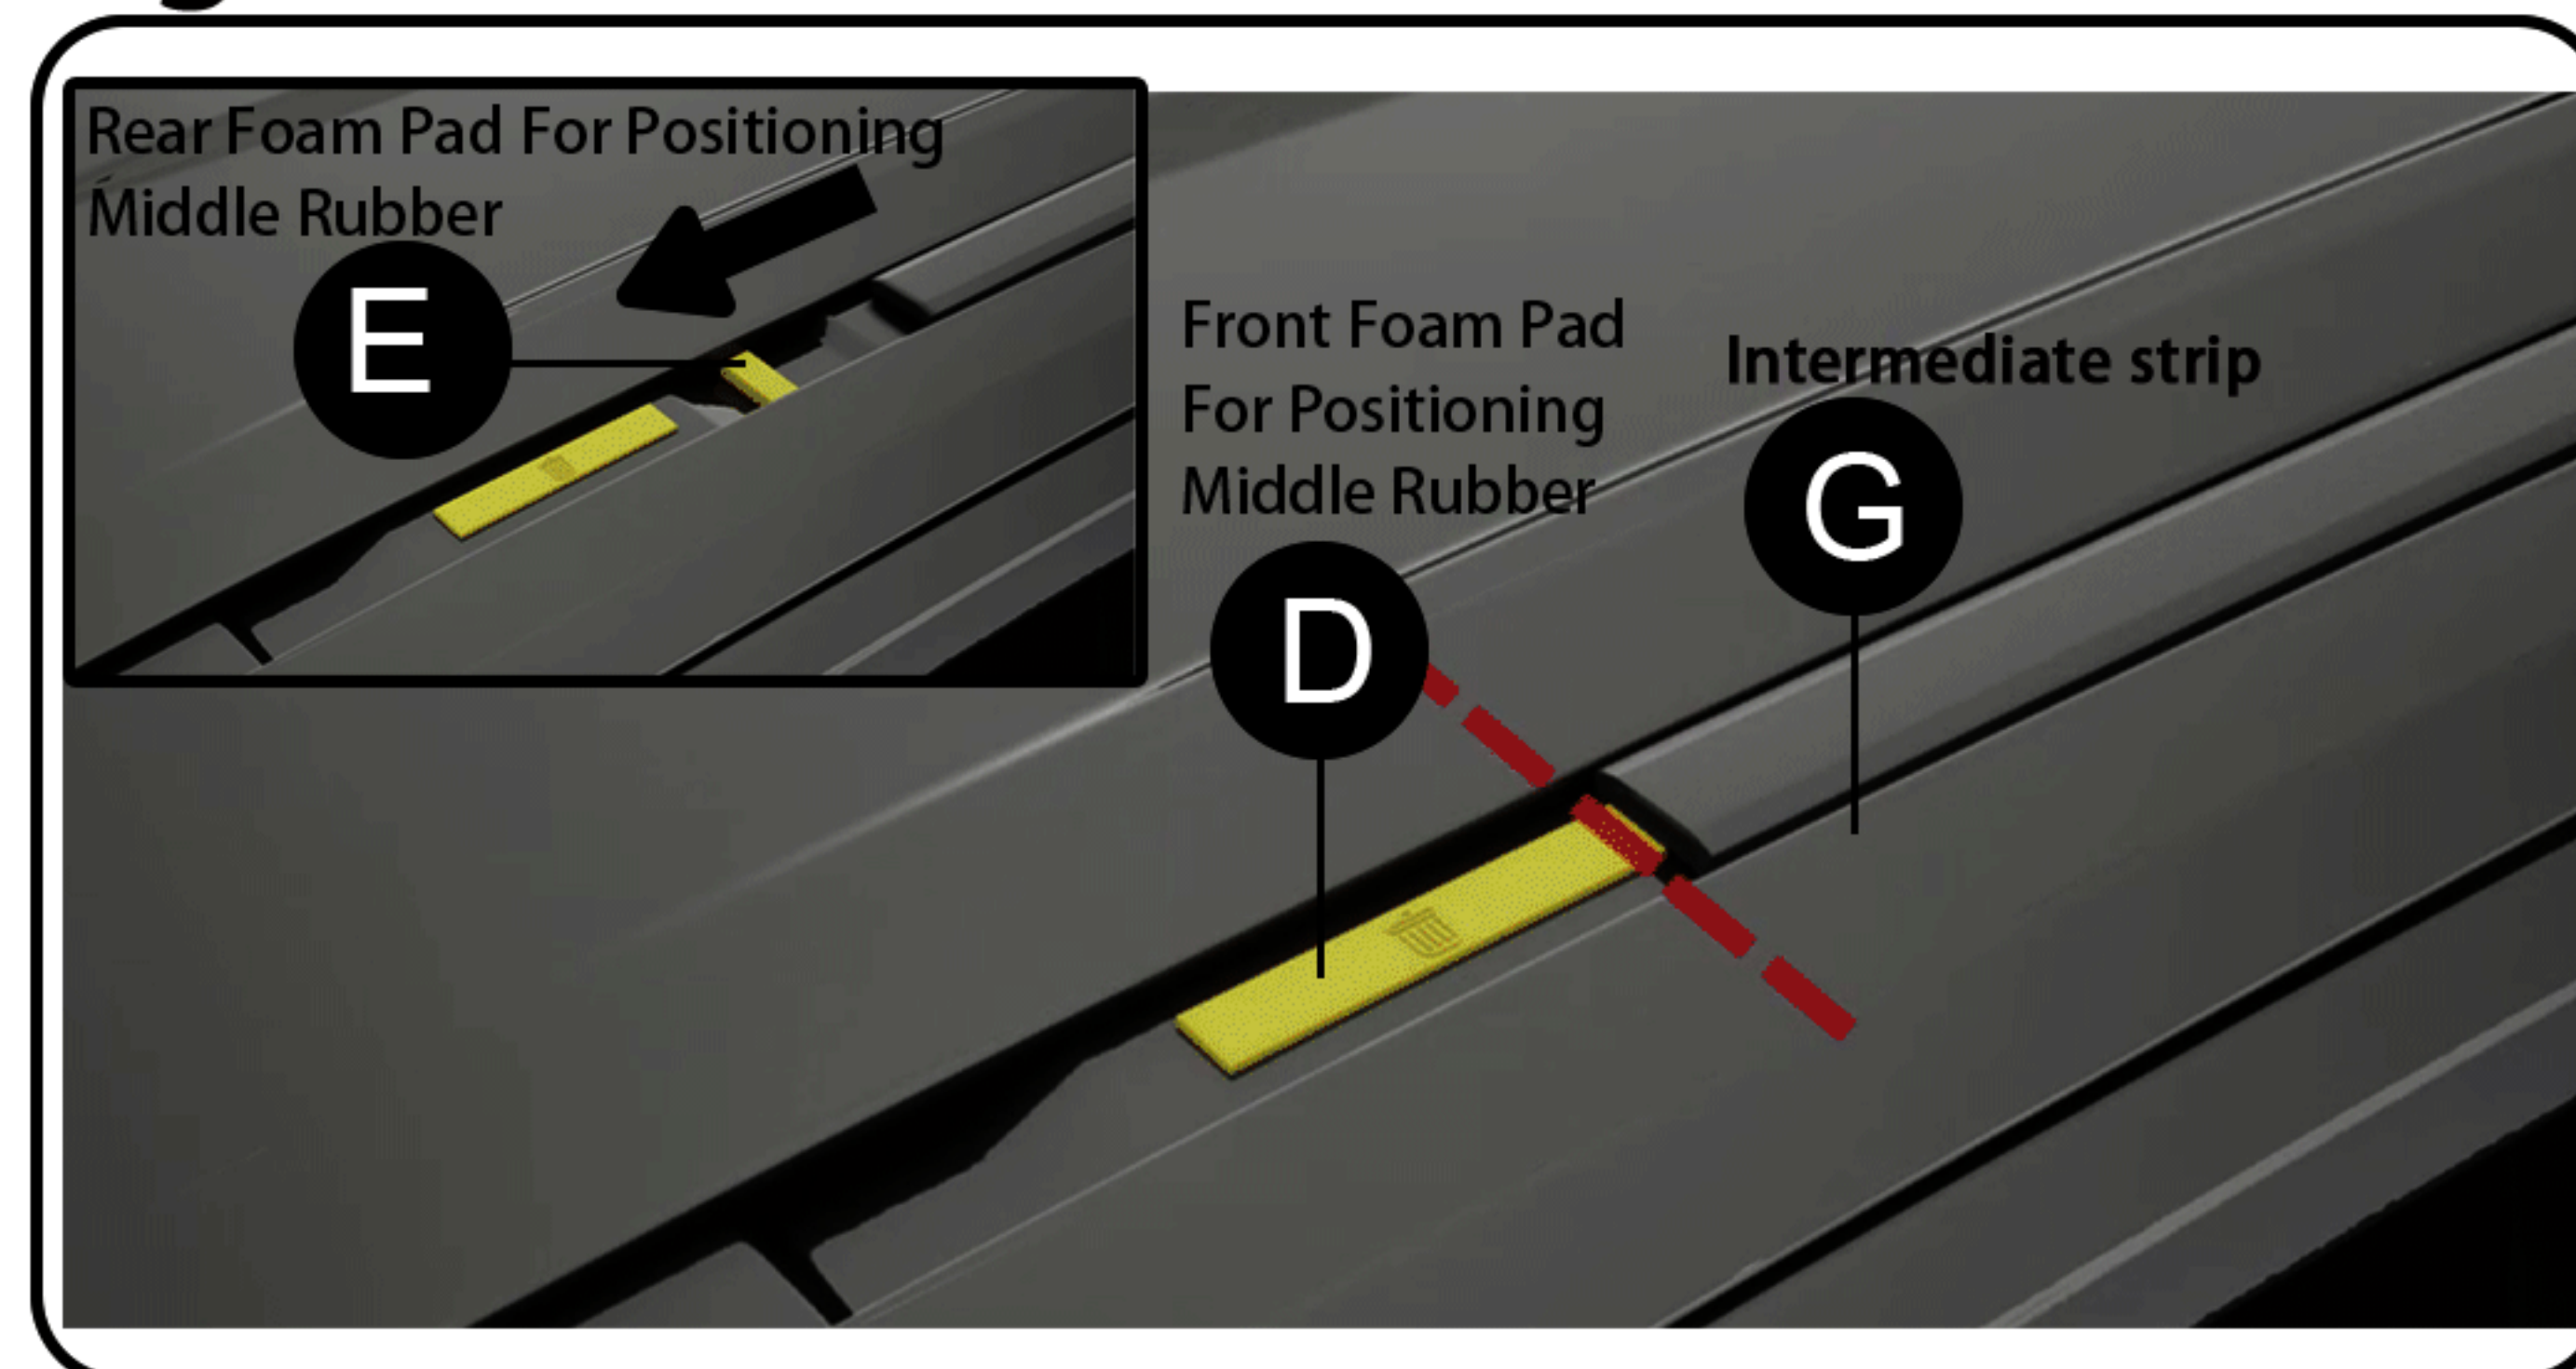


Place the positioning pad F as shown in the figure, and then place the intermediate strip flush with the positioning pad F.

Figure 2.5

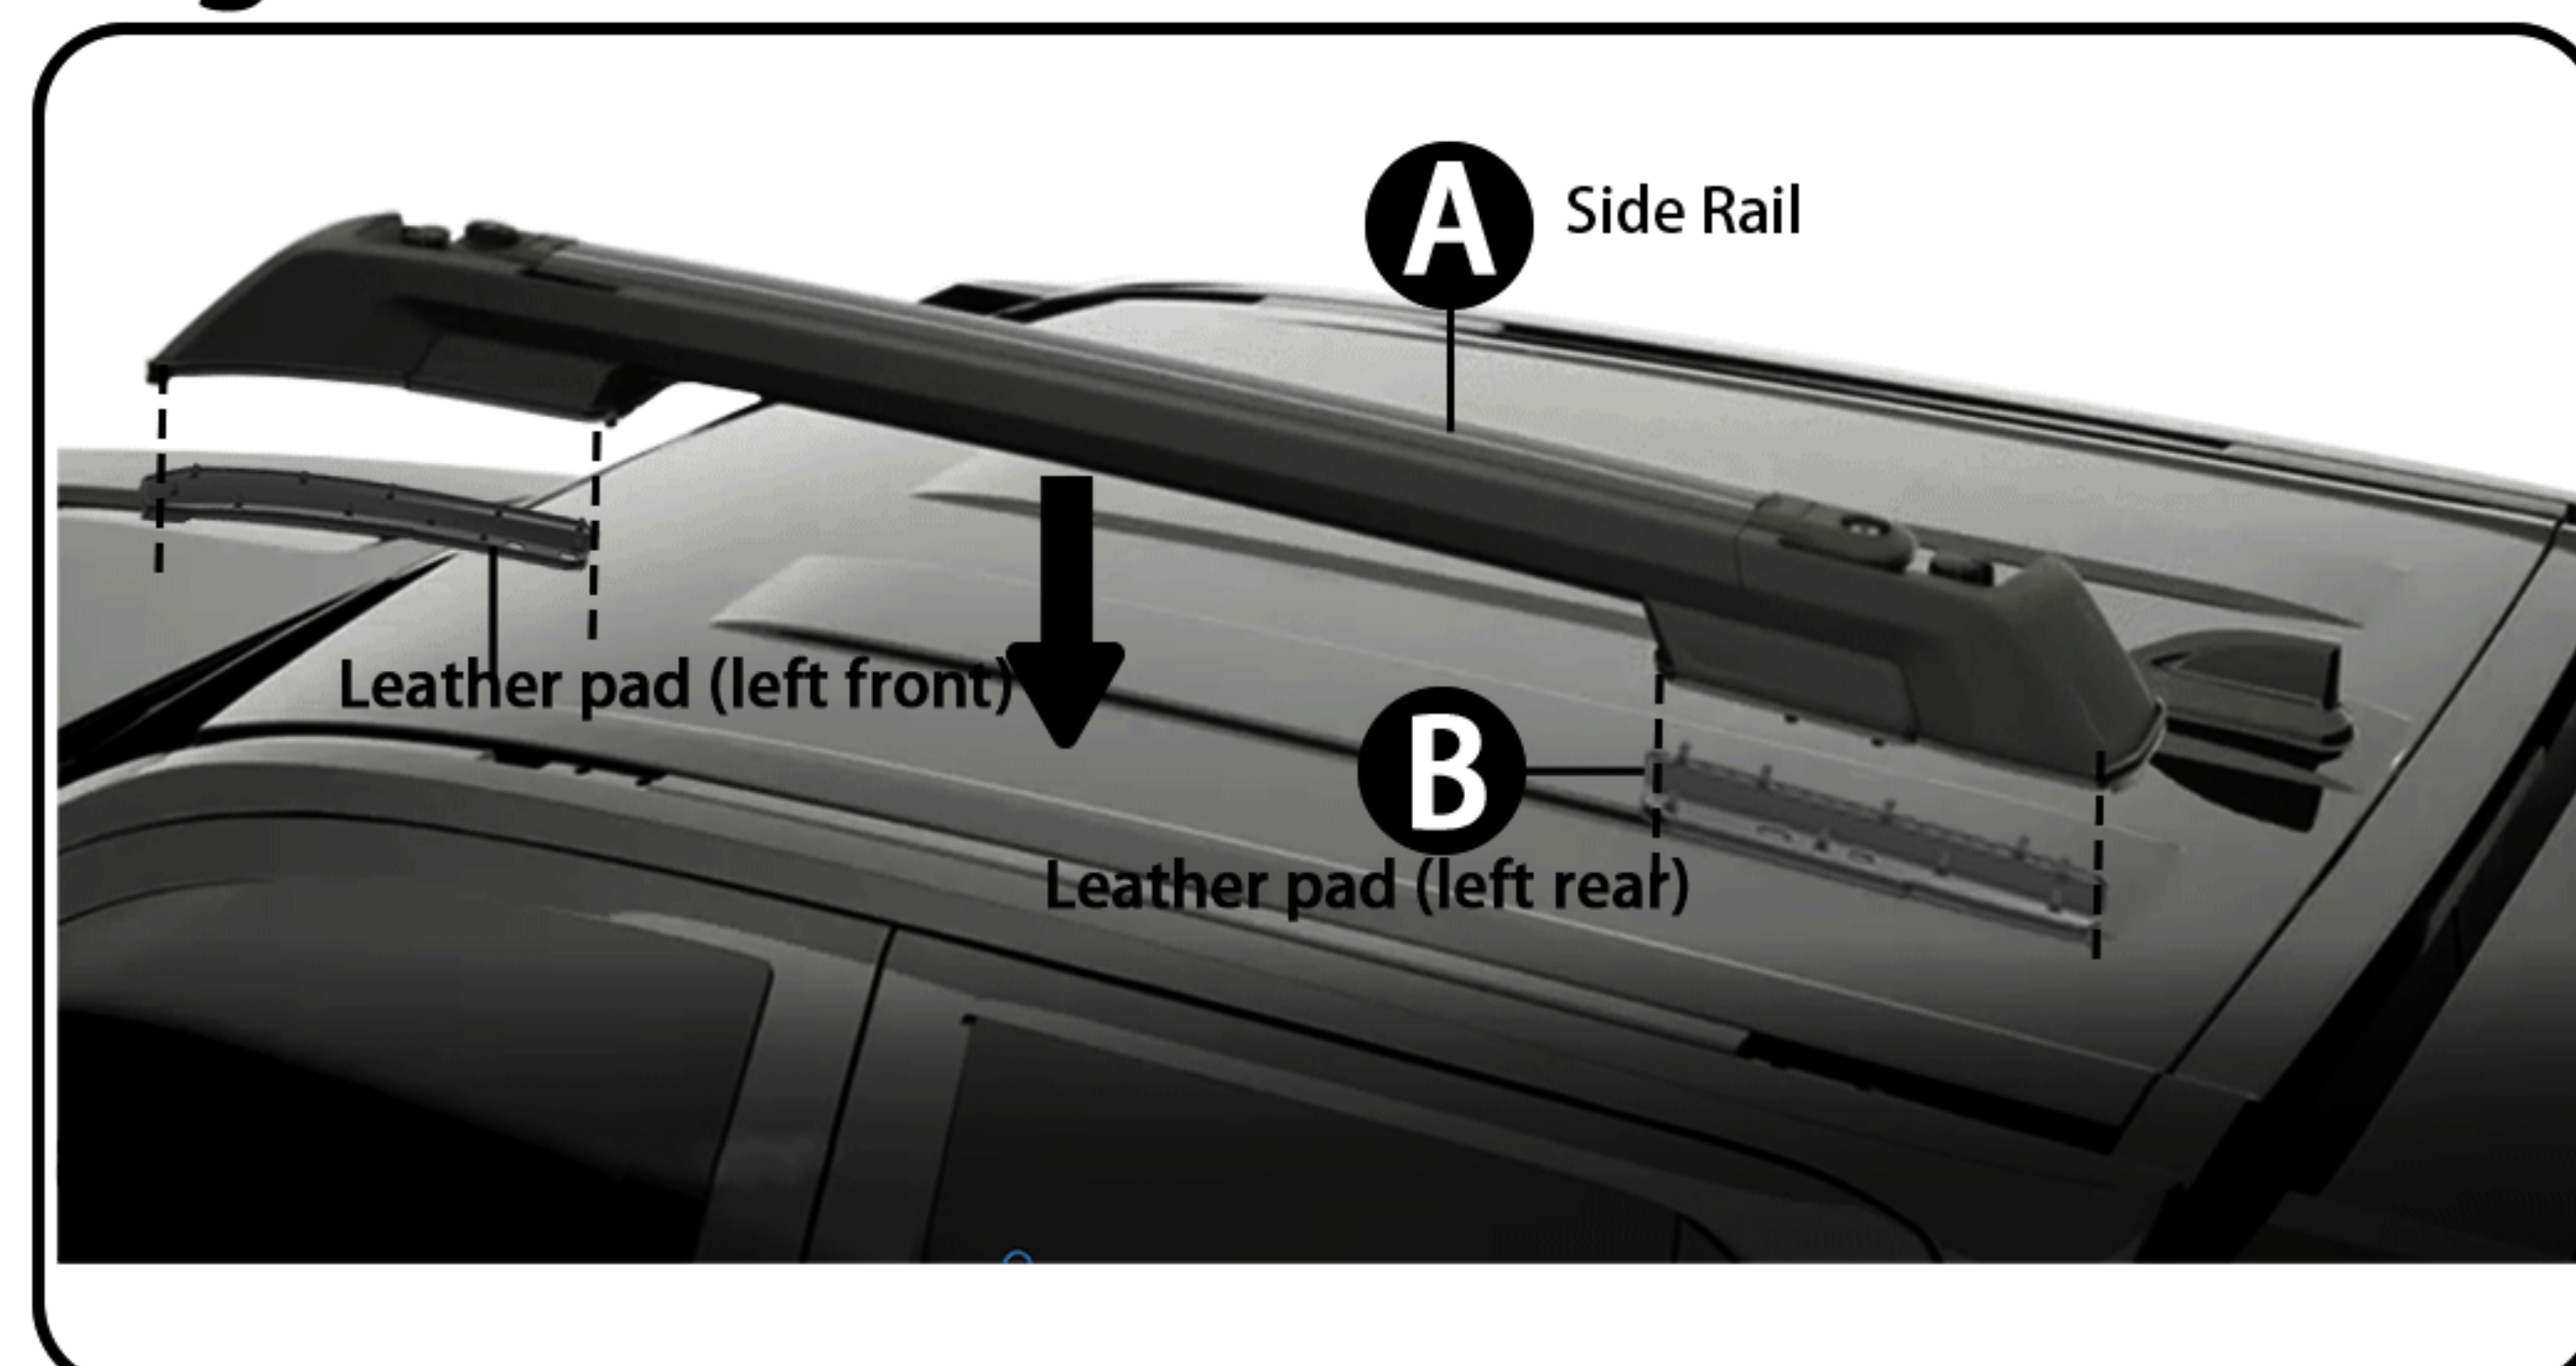


Install the leather pad on the roof rails' base and place it on the roof

Figure 2.6

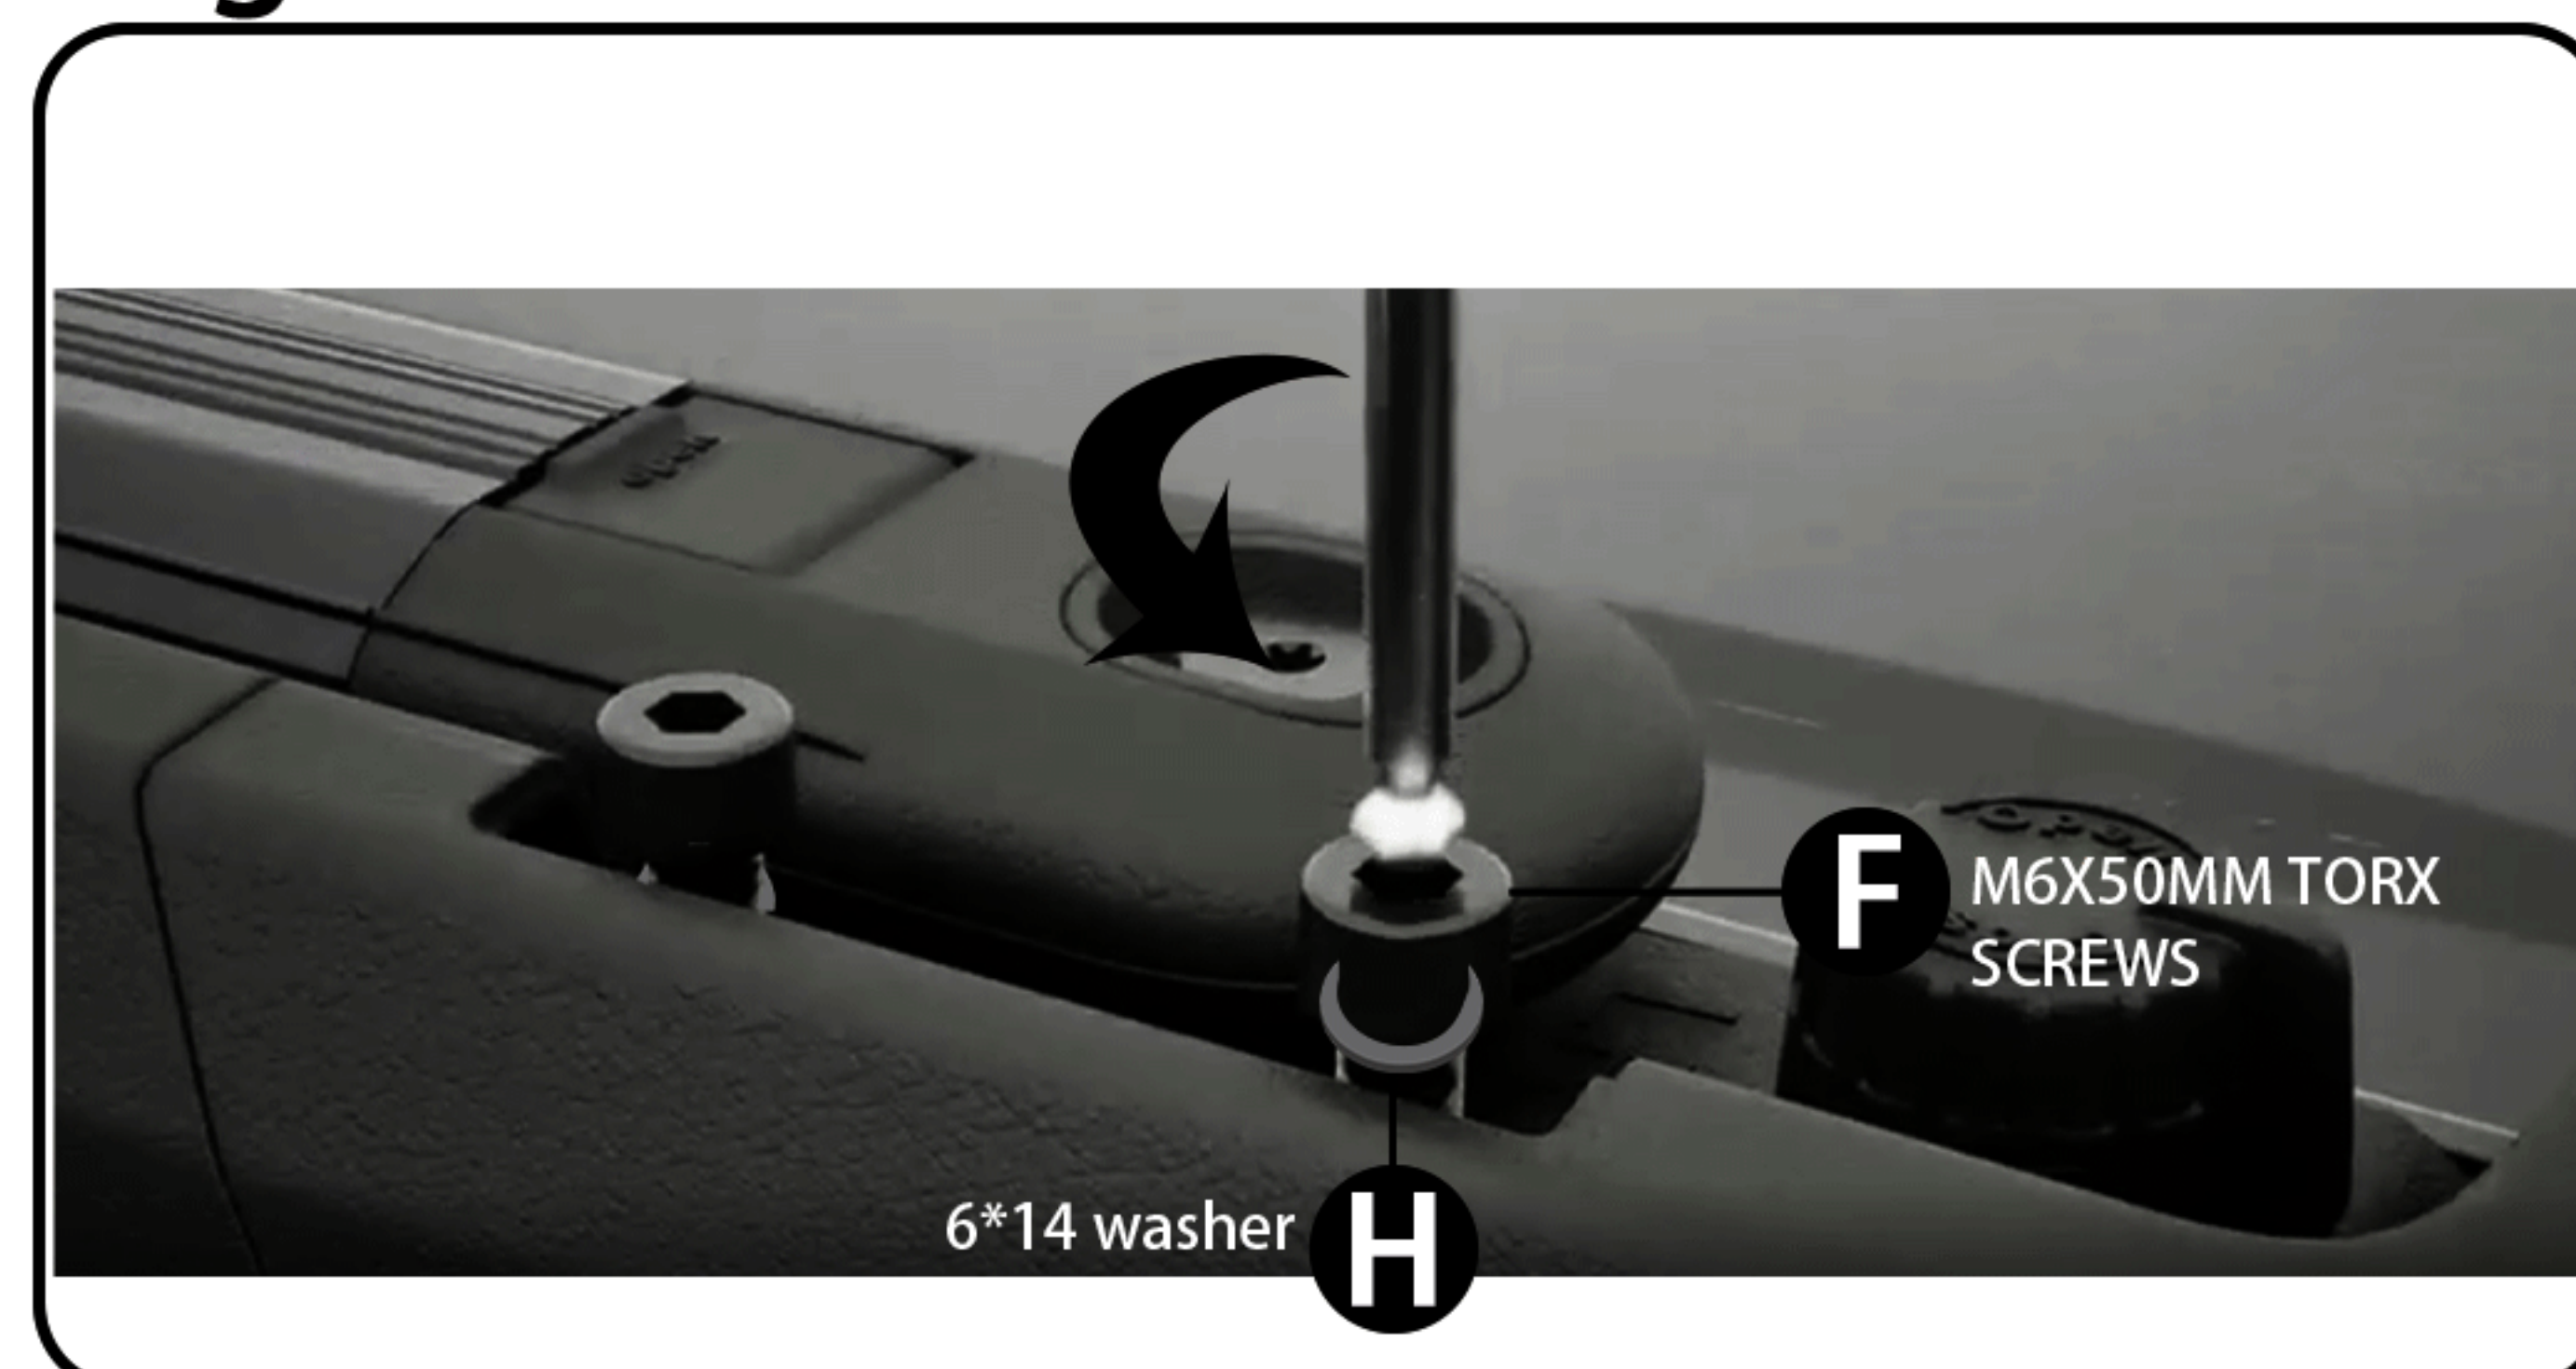


Use M6*50 torx screws with sealant and 6*14 washers to fix the roof rails to the roof

Figure 2.7

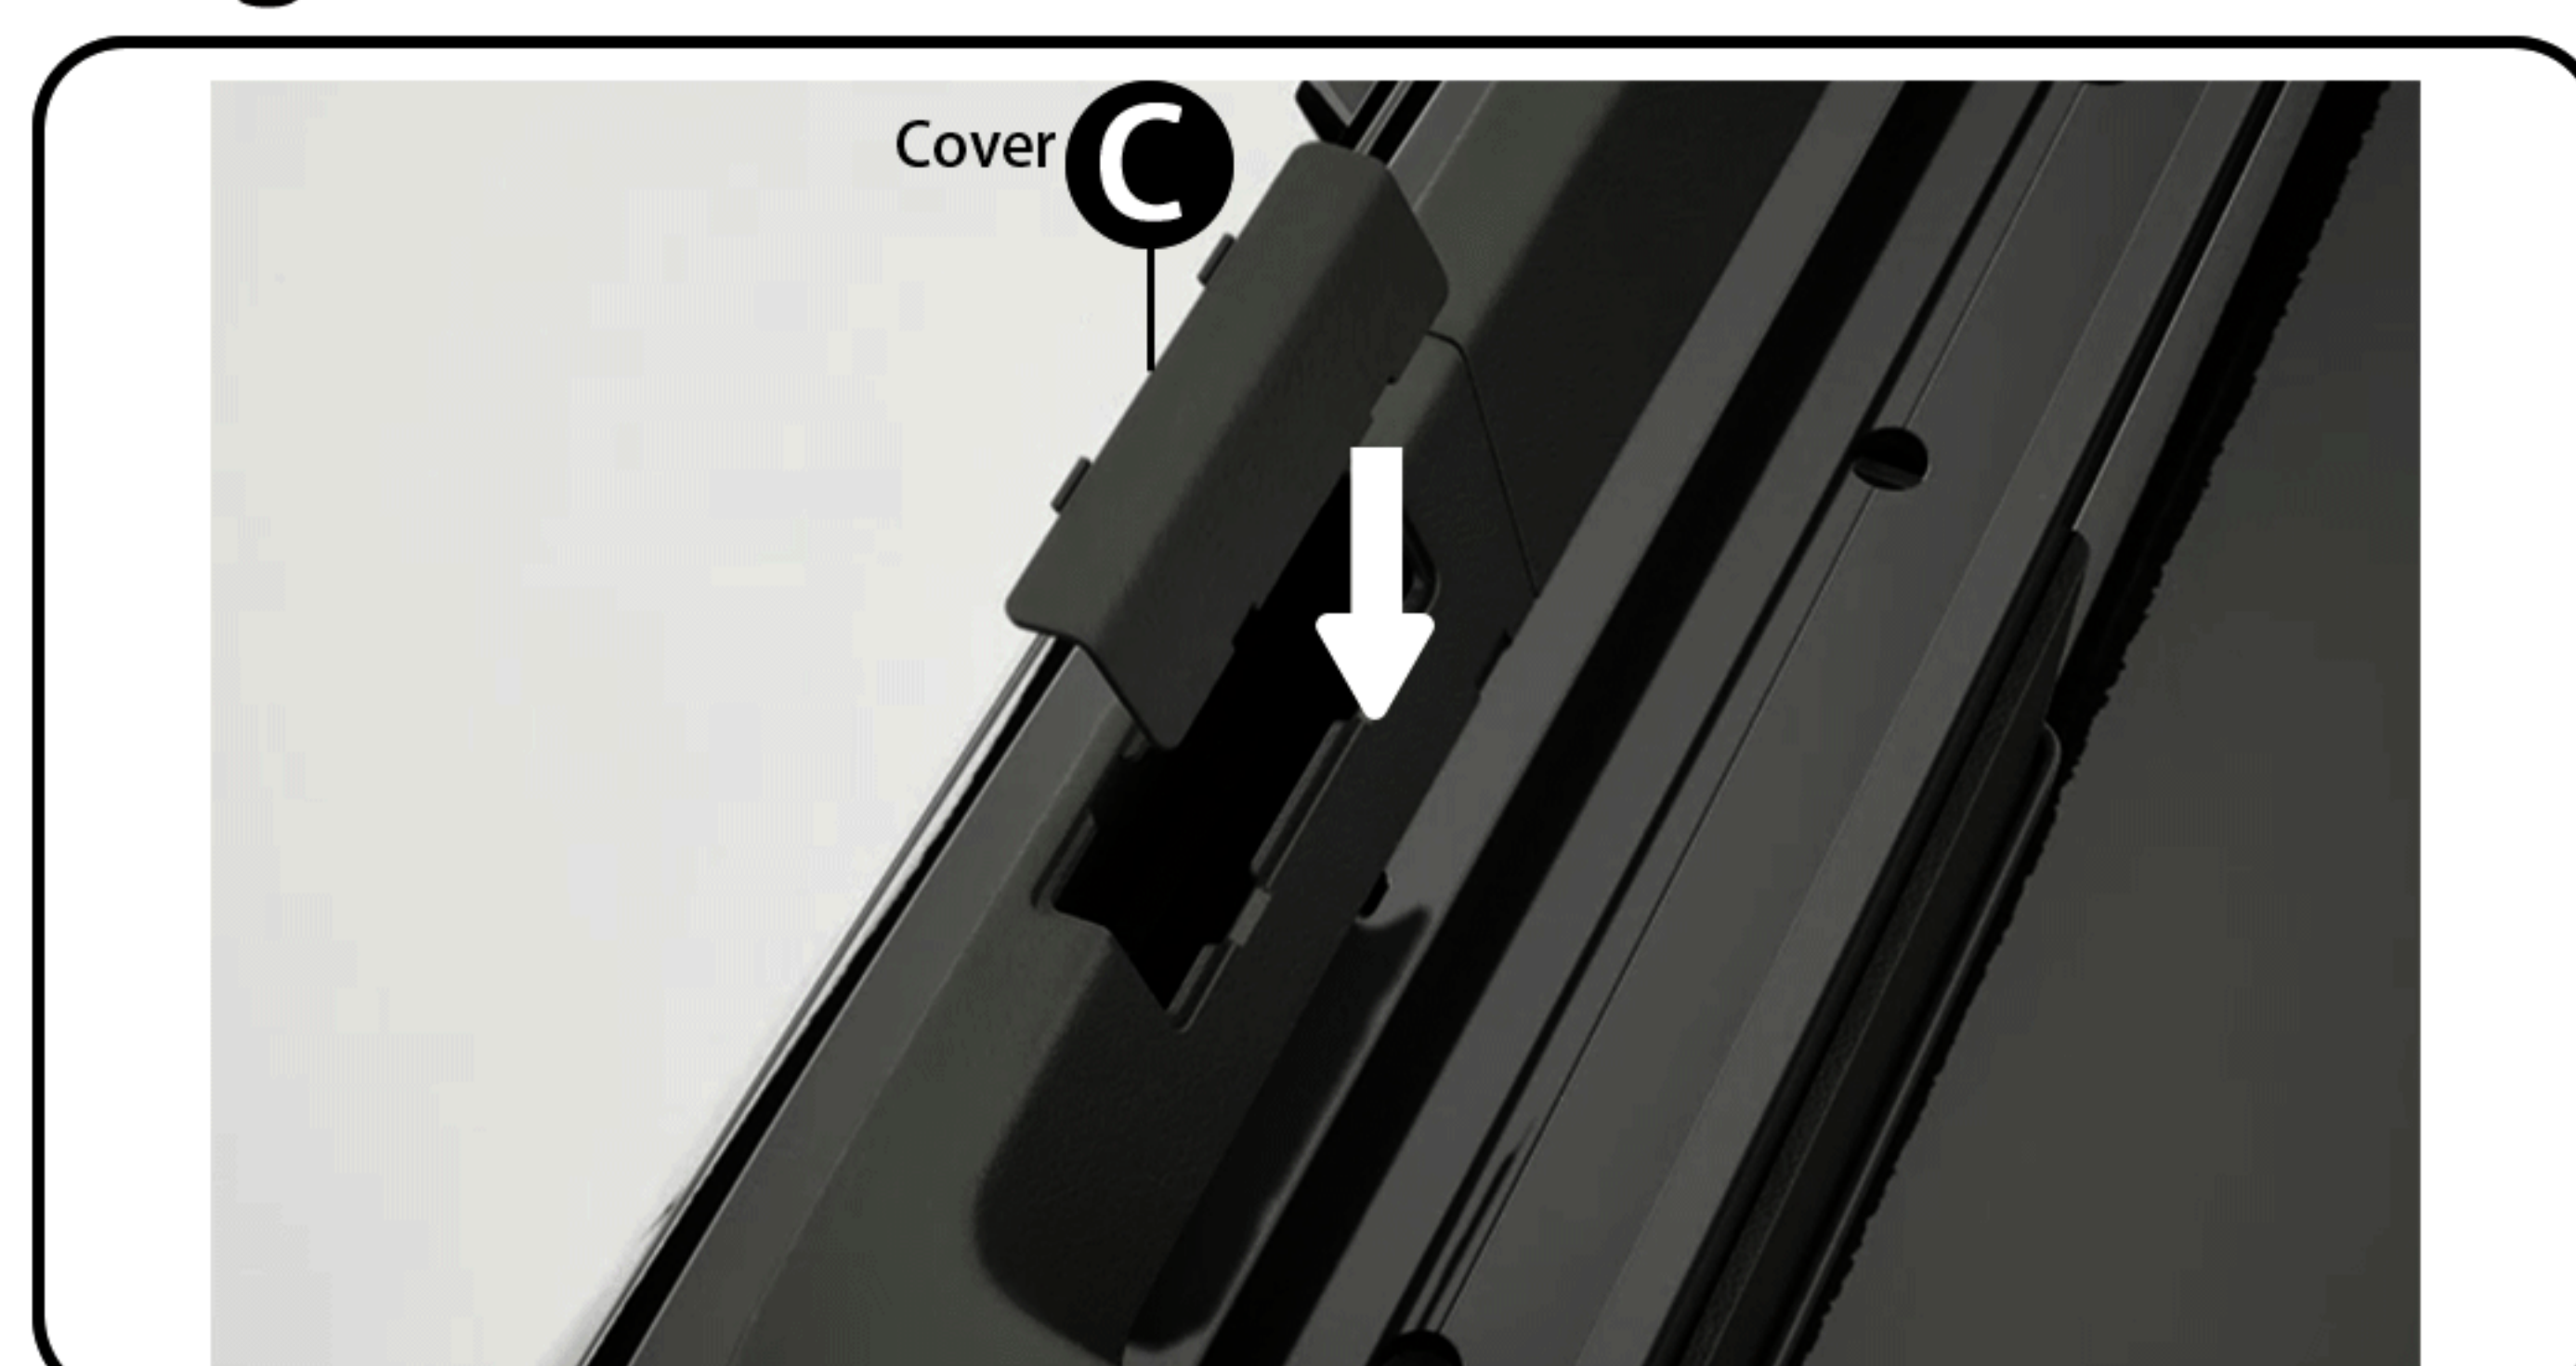


Fasten the Cover on the Side Rail (note the direction of the Cover)

Figure 2.8

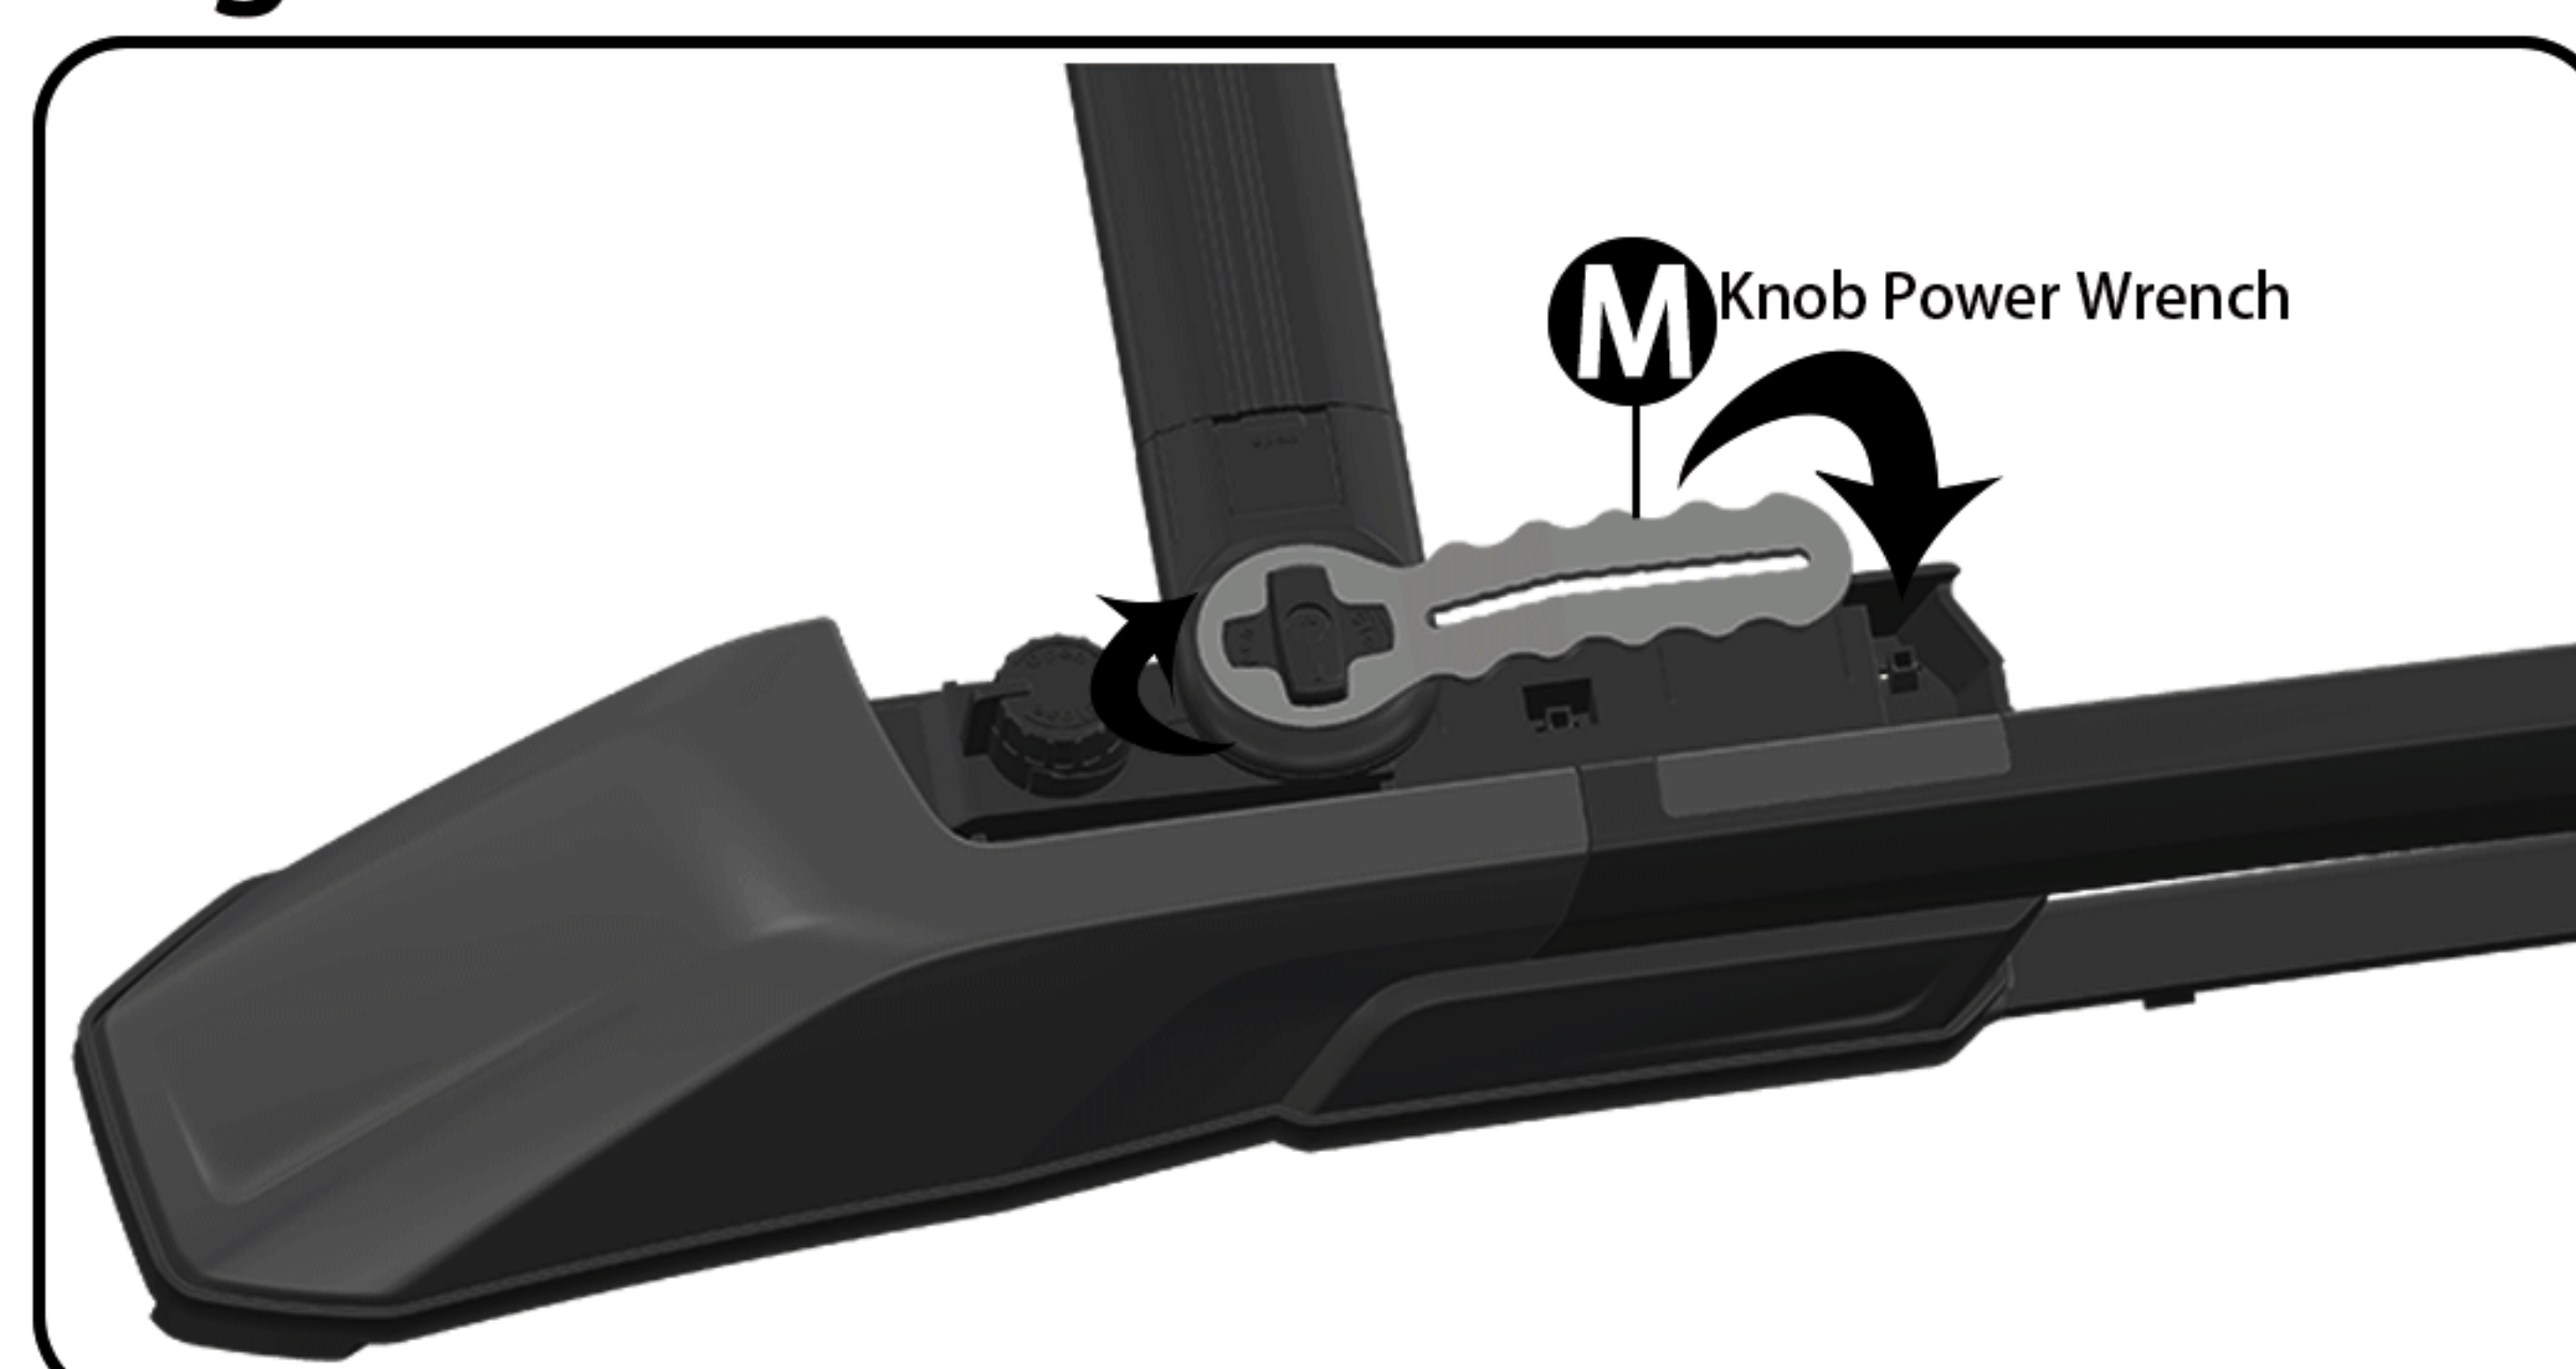


Use the Knob Power Wrench to turn the knob on the crossbar

Figure 2.9

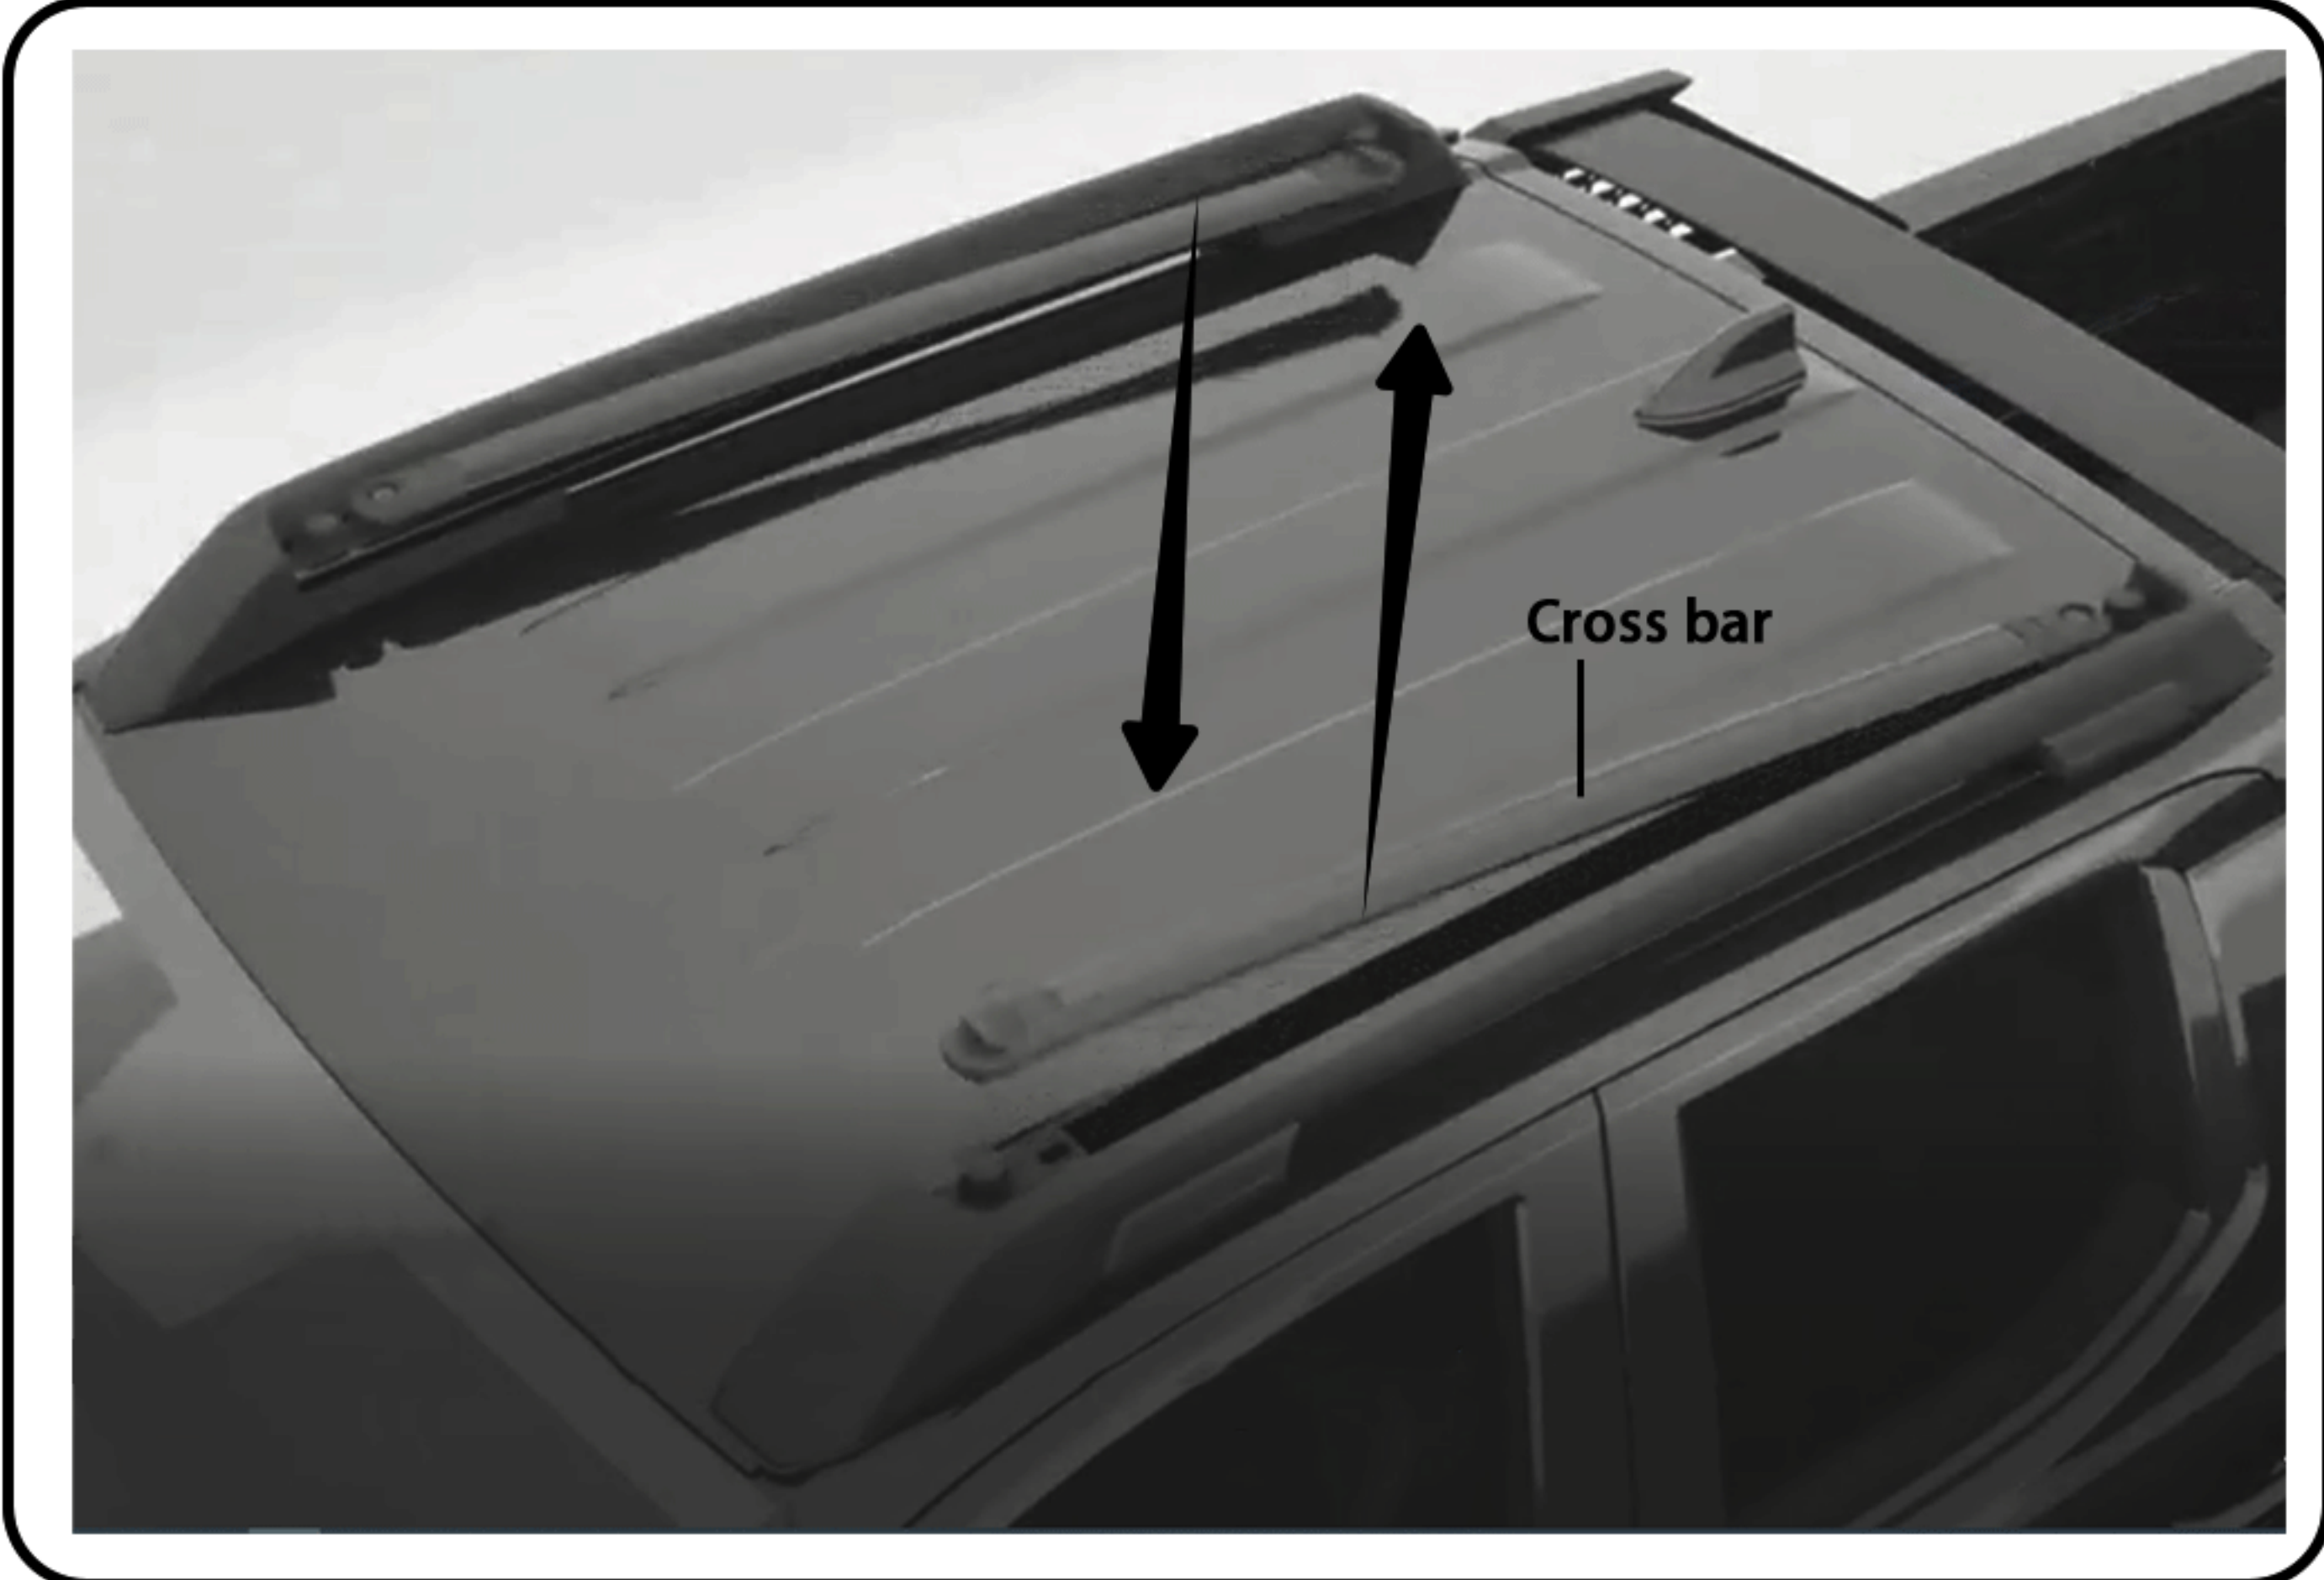

Move the bar as shown

Figure 2.10

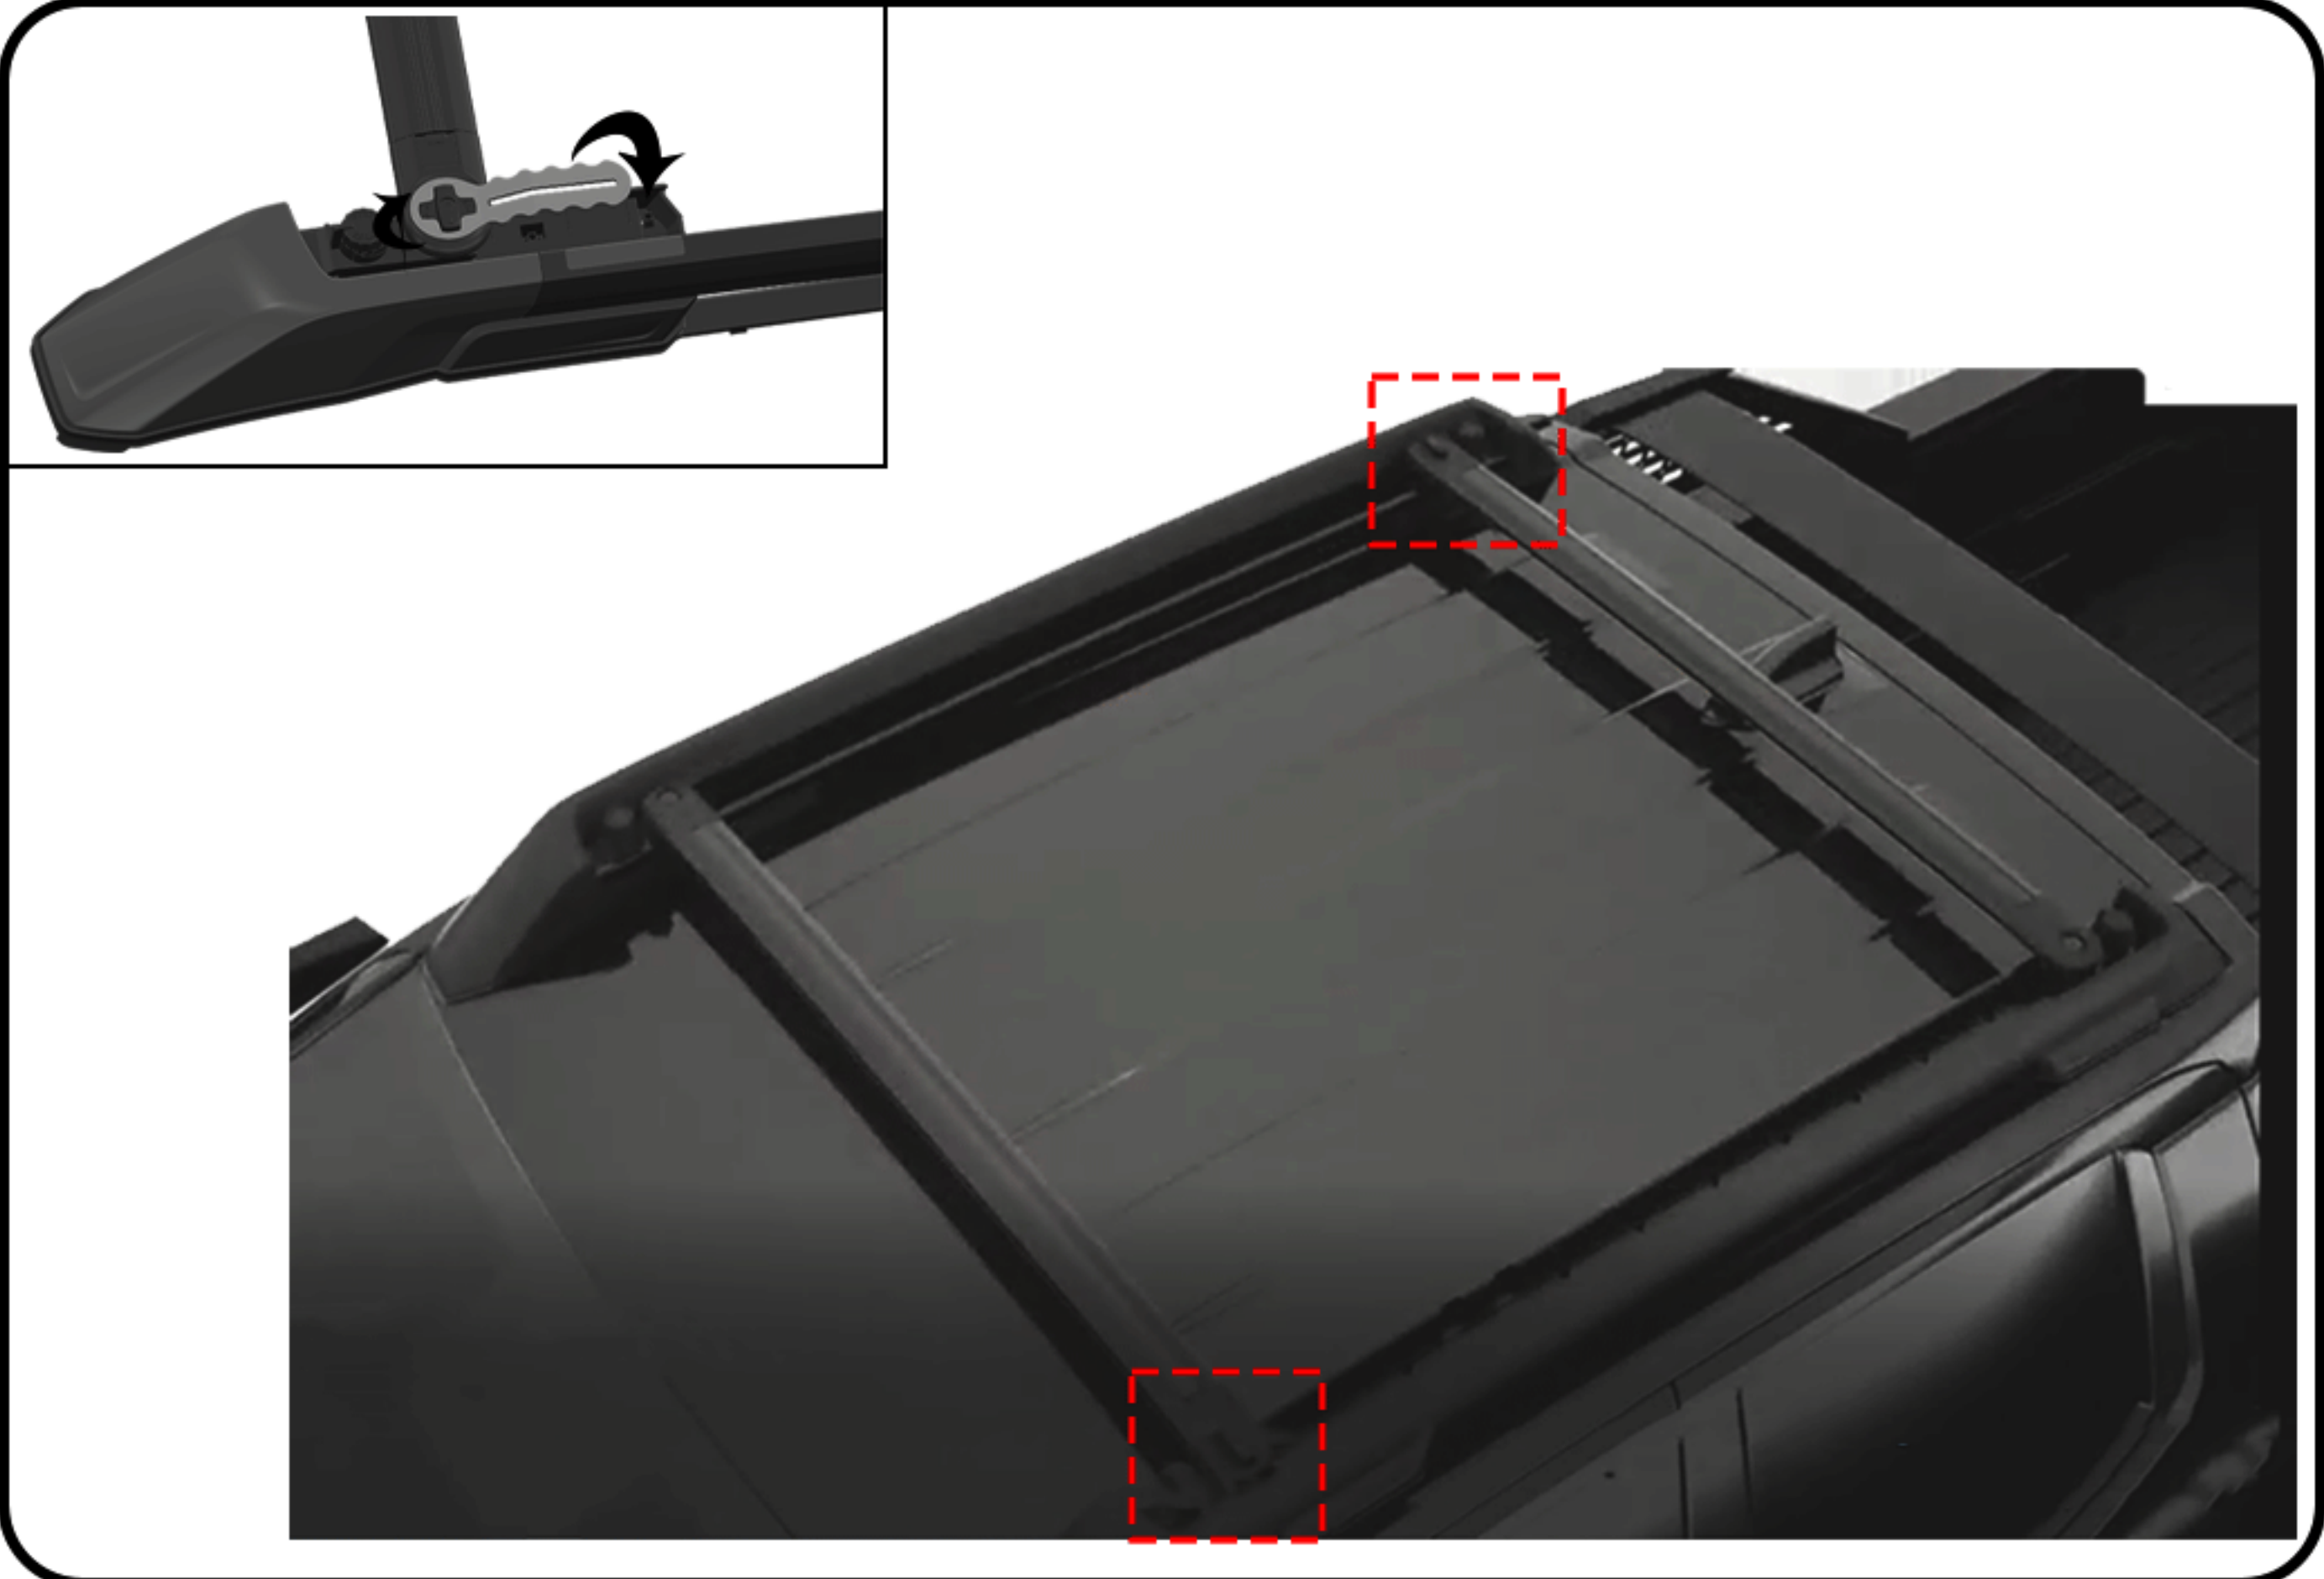

After moving the bar to the specified position, use the Knob Power Wrench to tighten the knob on the bar

Figure 2.11



Use a 4mm wrench to tighten the machine screws in the position shown.

Figure 2.12



Turn the knob on the roof rack to move the cross bars back and forth

Figure 2.13



Installation complete