



Model 345 ANIMAL HOUSE™ INSTALLATION INSTRUCTIONS

INSTALLATION AND OPERATING INSTRUCTIONS

Your purchase of a WOLO horn is a perfect choice to compliment your vehicle. Our horns are manufactured with the finest of materials. Each horn is bench tested before it is packaged to assure workmanship and quality, so you will have many years of reliable service.

IMPORTANT: THIS HORN SHOULD NEVER BE USED AS A REPLACEMENT FOR VEHICLE ORIGINAL EQUIPMENT HORN. ADDITIONALLY IT IS NOT TO BE USED AS A WARNING DEVICE, MODEL 345 ANIMAL HOUSE IS FOR OFF THE ROAD AND SHOW USE.

MOUNTING CONTROL BOX

1. Select a mounting location that allows easy access to the knobs and controls on the face of the animal house control box.
2. Mount the angle brackets (supplied) to each side of the ANIMAL HOUSE control box. See fig. (A).
3. Place the ANIMAL HOUSE control box in the selected mounting location. Using the mounting brackets as a template mark location for mounting holes to be drilled.
4. Drill holes (2) on marked locations using a 1/8 drill bit and mount control box with self tapping screws provided. See fig. (B).

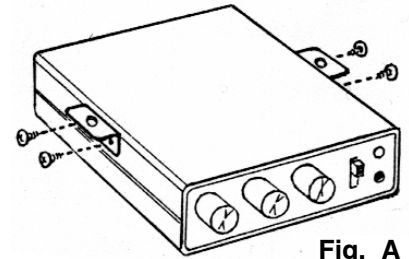


Fig. A

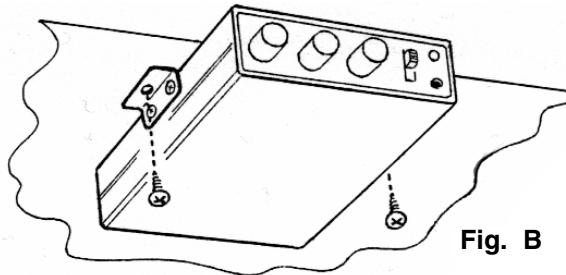


Fig. B

MOUNTING SPEAKER

5. Select a convenient location in the engine compartment that is dry and safe from the engines exhaust manifold heat. Always face the speaker in a downward position. This will help prevent water from entering into the speaker. Using the speakers mounting bracket as a template, mark hole locations (3) and drill using a 1/8 inch drill bit. Secure speaker with self tapping screws provided (3). Make sure that the speakers opening is not blocked by any compartments which could reduce its loudness.

WIRING (Fig. C)

6. **TWIN BLACK** is connected to the speaker in the engine compartment. Route wires through fire wall to speaker. Connect either wire to one of the the speaker wires. Then connect remaining wire to other speaker wire.
7. **RED WIRE** is connected to the fuse-block or a under dash wire that has power (+) 12 volts when the ignition is on. A 3 amp inline fuse must be used (included in kit).
8. **SINGLE BLACK WIRE** is grounded. Secure wire under a bolt in the dashboard area, make sure that the METAL surface around the bolt is clean of rust and paint to make a good electrical connection.

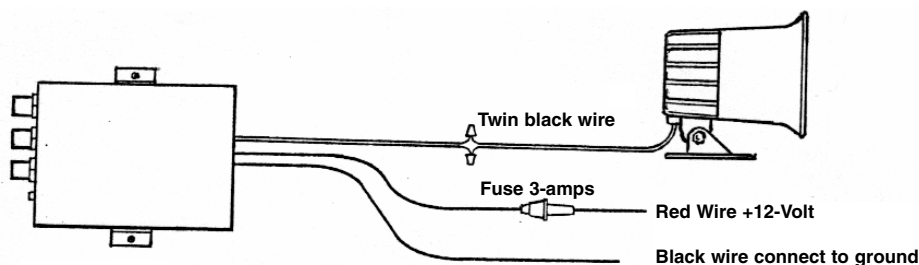


Fig. C

TESTING AND OPERATION

9. Put the vehicles ignition on so to power your ANIMAL HOUSE HORN during testing.
10. Turn the ANIMAL HOUSE VOLUME knob to the right. The red LED power indicator will light to show that the horn is now ON.

A. ANIMAL & MUSICAL: Place the slide switch to the top position. **ANIMAL.** Using the center knob marked **ANIMAL**, you can select (9) different animal sounds and when placed in the music position (50) different chime songs will play continuously. Use the **VOLUME** knob to control loudness.

B. SIREN: Place the slide switch in the middle position. **SIREN.** Using the right knob marked **SIREN**, you can select (10) different siren sounds. Use the **VOLUME** knob to control loudness.

C. PA: Place the microphone jack into the socket marked **MIC**. Place the slide switch into the bottom position marked **PA**. Place the switch located on microphone handle in the ON position. Use the **VOLUME** knob to control loudness.