HEAVYWEIGHT




Always Read All Product Literature **BEFORE** installing product.

A WARNING

- Always position fairlead with warning readily visible on top.
- Always use class 8.8 metric (grade 5) or better hardware.
- Never weld mounting bolts.
- **Never** use bolts that are too long.
- · Always confirm required bolt length to ensure proper thread engagement.
- Always complete the winch installation and hook attachment before installing the wiring.




Mounting



| Plate Thickness | Bolt Length | | |
|-----------------|---------------|--|--|
| 5/16" (8 mm) | 1.5" (40 mm) | | |
| 3/8" (10 mm) | 1.5" (40 mm) | | |
| 1/2" (13 mm) | 1.75" (45 mm) | | |

| ltem | Qty | Description | ltem | Qty | Description | |
|------|-----|------------------|------|-----|------------------|--|
| Α | 4 | 7/16" (11.1 mm) | Α | 4 | 7/16" (11.1 mm) | |
| В | 4 | 7/16-14 X 1 1/2" | В | 2 | 7/16-14 X 1 1/2" | |
| С | 2 | 7/16-14 X 1 3/4" | С | 4 | 7/16-14 X 1 3/4" | |
| D | 6 | 7/16" (11.1 mm) | D | 6 | 7/16" (11.1 mm) | |

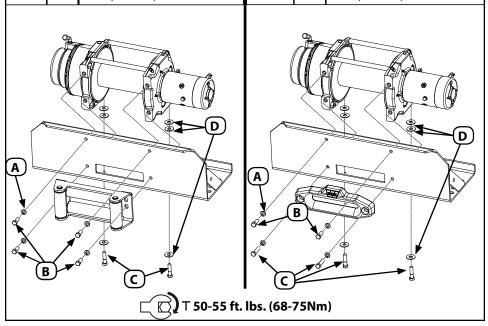

| Control Pack Mounting | | | | | | | | |
|---|---|---|-----------------|---------|--------------|--|--|--|
| | | 16.5Ti | M12/M15 | | | | | |
| ltem | Qty | Description | ltem | Qty | Description | | | |
| Α | 1 | Control Pack | Α | 1 | Control Pack | | | |
| В | 1 | 7/16-14 x 1" | В | 1 | 7/16-14 x 1" | | | |
| (B) | | С | 1 | Bracket | | | | |
| A A | | | D | 2 | M6 -1.0 | | | |
| B A C D | | | | | | | | |
| Wiring MARNING | | | | | | | | |
| Always remove jewelry and wear eye protection when making battery connections. Never route electrical cables across sharp edges. | | | | | | | | |
| Never route electrical cables across sharp edges. Never route electrical cables near parts that get hot. | | | | | | | | |
| 2 . | Never route electrical cables over battery terminals. | | | | | | | |
| Never route electrical cables through or near moving parts. | | | | | | | | |
| 9 | Alway | s insulate and protect all exposed wiring and | electrical tern | ninals. | | | | |
| Always place the supplied terminal boots on wires and terminals. | | | | | | | | |
| Ground (Black) Cable Power (Red) Cable | | | | | | | | |

Shop for other winches on our website.