



Alternator Plug Code Guide

BBB Number	PLUG
7002	320
7006	375
7007	375
7024	375
7058	410
7072	194
7074-9	194
7078	410
7078DP	410
7083	410
7088-2	330
7088-10	330
7107	153
7111	153
7122	153
7127	151
7133	153
7134	151
7134-R	151
7135M	151
7135-R	151
7137	151
7137-R	151
7145	151
7157M	151
7191-12	151
7192-12	151
7273	151
7273-R	151
7278-12	151
7279	151
7282	151
7286	151
7287	151
7288-12	151
7290	151
7291-12	155
7292	151
7292R	151
7294	151
7294-R	151
7427	149
7429	149
7505	375
7509	375
7521	376

BBB Number	PLUG
7537	375
7546	375
7549	375
7552	320
7705	194
7716-2	330
7716-10	330
7732-2	330
7732-10	330
7735-2	330
7735-10	330
7742	194
7744-2	330
7744-10	330
7745-2	330
7746-2	330
7748	330
7749-11	330
7750	330
7751	330
7751-P57	330
7752	330
7753	330
7753-P58	330
7755-3	330
7755	330
7756-7	330
7757	330
7758	330
7758-P57	330
7759	330
7760	330
7761	330
7761-P05	330
7761-P57	330
7764	330
7764-P57	330
7764-P58	330
7764-P66	330
7765	330
7768	330
N7768-HO	330
N7768-SD	330
7768-P57	330
N7768-P57-HO	330
N7768-P57-SD	330

BBB Number	PLUG
7768-P61	330
N7768-P61-HO	330
N7768-P61-SD	330
7768-P62	330
N7768-P62-HO	330
N7768-P62-SD	330
7769	330
7770	330
7771	330
7771-P57	330
7773	331
N7773-HO	331
N7773-SD	331
7774	332
7775	332
7776	330
N7776-HO	330
N7776-SD	330
7777	330
7780	331
7780L	331
7781	331
7784	332
7786	331
7786-P63	331
7787	331
N7787-HO	331
N7787-SD	331
7788	337
7790	330
7791	330
N7791-HO	330
N7791-SD	330
7792	332
7793	330
7794	330
7795	336
N7795-HO	336
N7795-SD	336
7796	336
7797	336
N7797-HO	336
N7797-SD	336
7798	336
N7798-HO	336
N7798-SD	336

BBB Number	PLUG
7799	336
7801-3	310
7801-7	310
7801-11	310
7802-7	310
7803-7	309
7804-11	309
7805-10	309
7806-1	309
7807-11	309
7808-3	310
7808-7	310
7810-3	309
7811-10	309
7812-10	309
7813-10	309
7814-4	309
7816-7	310
7818-3	310
7818-7	310
7819-11	310
7820-11	309
7823-11	309
7830	151
7830R	151
7854-9	151
7856-7	310
7857-7	310
7858-11	310
7859-7	310
7860-11	310
7861-3	310
7861-7	310
7861-11	310
7862-10	310
7863-2	309
7864-2	310
7864-4	310
7864-10	310
7870-11	310
7872-3	310
7873-11	310
7875-11	310
7880-7	310
7880-11	310
7881-3	310

BBB Number	PLUG
7881-11	310
7883-7	310
7884-11	310
7885-11	310
7886-11	310
7887-11	310
7888-3	310
7888-7	310
7890-11	310
7891-11	310
7891-3	310
7892-11	310
7893-3	310
7894-3	310
7894-7	310
7897-11	310
7901-1	310
7901-5	310
7901-7	310
7902-11	310
7904-2	309
7905-3	310
7906-11	310
7909-7	310
7910-3	310
7911-4	310
7912-7	310
7913-3	310
7914-11	310
7916-1	309
7917-11	310
7918-5	310
7918-7	310
7921-3	310
7921-7	310
7925-11	310
7926-7	310
7928-11	310
7929	310
7933-11	310
7934-12	155
7935-11	310
7937-3	310
7937-7	310
7937-11	310
7939-3	310

BBB Number	PLUG
7941-10	310
7942-2	309
7944-11	310
7949	282
7951-11	310
7954	370
7955-7	310
7964-7	310
7964-11	310
7966-2	309
7968	282
7969-2	309
7970-11	310
7972	310
7973	310
7974-7	310
7977-11	310
7980	310
7981-7	310
7984-5	310
7984-7	310
7985-2	309
7985-11	309
7988-11	310
7993-7	310
8009-5	310
8101-1	310
8103-7	310
8103-11	310
8105-1	310
8106-7	280
8107	310
8112-5	310
8113-11	309
8114-3	310
8115-7	310
8116-7	310
8119-7	310
8127-11	309
8130-11	310
8134-7	309
8136-2	309
8137-7	310
8137-11	310
8142-10	310
8153	280

BBB Number	PLUG
8154-7	310
8155-3	313
8155-P72	313
8156	313
8156-P72	313
8158-5	313
8160-5	313
8160-7	313
8160-11	313
8163-2	310
8163-11	310
8165-3	310
8165-7	310
8165-11	310
8166-11	310
8167-11	310
8169-7	310
8169-11	310
8170-11	309
8171-7	310
8172-7	310
8173-2	310
8174-5	309
8175-11	310
8178-11	310
8179-7	310
8183-5	309
8188-11	309
8189-7	309
8190-11	314
8191-5	309
8192-5	310
8193-5	310
8194-7	309
8197-7	314
8198	310
8199-2	314
8200-11	313
8202-7	309
8203-5	310
8204-11	310
8206-5	313
8208-2	313
8209-5	310
8213-7	309
8214-11	310

BBB Number	PLUG
8215	310
8216-5	313
8217-3	310
8218-2	310
8219-5	310
8220	296
8221-5	310
8222-3	314
8223-7	314
8224-11	314
8225-7	309
8226	309
8226-P50	309
8227-5	313
8228-7	314
8229-7	314
8230-7	314
8231-5	314
8232	313
8233-7	314
8234-5	314
8235	314
8236	314
8237	314
8238	314
8239	381
8241	314
8242-5	313
8243-5	314
8244	314
8245	314
8246-5	313
8247	314
8248-11	310
8249-7	314
8250	338
8251	330
8252	336
8253	337
8253-P57	337
8254	338
8255	337
8256	337
8257	337
8258	330
8259	338

BBB Number	PLUG
8260	337
8261	337
8263	338
8264	337
8265	338
8266	336
8267	330
8268	337
8269	339
8271-7	314
8272-11	314
8273	314
8274	314
8275-2	314
8276-7	314
8277	314
8278	314
8279	314
8281	308
8283	314
8286	314
8287	314
8287-P79	314
8290	314
8292	314
8293	314
8294	314
8296	296
8299	314
8301	346
8302	346
8302-P79	346
8303	338
N8303-HO	338
N8303-SD	338
8304	336
8305	338
8306	336
8307	336
N8307-HO	336
N8307-SD	336
8308	331
8309	338
8310	336
8311	336
8313	339

BBB Number	PLUG
8314	339
8315	337
N8315-HO	337
N8315-SD	337
8316	336
8317	336
8318	337
8401	339
8402	339
8403	339
8404	339
8405	339
8406	337
8407	337
8408	337
N8408-HO	337
N8408-SD	337
8418	337
8429	330
8436	331
8437	337
8439	337
8440	337
8442	339
8443	337
8444	337
8445	336
8446	330
8447	337
8448	336
8472	337
8473	336
8474	339
8477	334
8478	336
N8478-HO	336
N8478-SD	336
8479	336
8483	313
8484	329
8485	313
8489	314
8497	314
8498	346
8499	346
8511	339

BBB Number	PLUG
8512	339
8513	337
8516	337
8518	338
8519	330
8520	330
8521	337
8522	339
8550	346
11000	919
11001	307
11002	381
11003	323
11004	300
11005	303
11006	341
11007	341
11008	303
11009	300
11010	300
11011	306
11012	306
11013	327
11014	307
11015	300
11016	327
11017	306
11018	306
11020	300
11021	326
11022	322
11023	326
11024	319
11025	303
11026	337
11027	300
11028	307
11029	307
11030	296
11031	321
11032	295
11033	295
11034	295
11035	322
11036	323
11038	346

BBB Number	PLUG
11039	363
11040	363
11041	367
11042	367
11043	365
11044	346
11045	314
11046	346
11047	323
11048	363
11049	316
11050	367
11051	300
11052	300
11053	307
11054	435
11055	307
11056	307
11057	300
11058	325
11059	367
11061	063
11062	932
11063	362
11067	063
11069	323
11075	346
11076	314
11081	371
11082	371
11084	295
11085	321
11086	318
11088	295
11089	295
11091	133
11094	362
11095	307
11096	300
11101	316
11108	381
11112	363
11113	363
11116	363
11118	307
11121	325

BBB Number	PLUG
11123	364
11125	346
11127	346
11133	367
11134	367
11135	361
11136	295
11137	295
11138	295
11139	295
11140	346
11142	323
11145	323
11146	329
11148	326
11149	367
11150	933
11151	296
11155	363
11163	300
11164	318
11165	325
11168	341
11169	341
11170	307
11172	337
11174	303
11175	933
11176	933
11177	933
11178	346
11179	346
11180	346
11181	346
11184	365
11185	346
11189	347
11190	347
11191	347
11194	295
11195	295
11196	295
11198	295
11201	297
11202	347
11203	295

BBB Number	PLUG
11210	367
11231	377
11233	377
11235	363
11236	346
11238	343
11240	378
11241	378
11242	378
11243	378
11244	377
11248	346
11250	346
11252	346
11265	326
11266	326
11279	365
11285	378
11286	377
11290	343
11291	343
11294	378
11295	378
11296	378
11297	378
11298	378
11299	378
11305	063
11306	063
11315	325
11317	307
11318	367
11322	297
11323	297
11324	295
11326	295
11328	297
11330	341
11340	325
11341	325
11350	295
11351	295
11352	295
11354	295
11377	307
11378	378

BBB Number	PLUG
11379	378
11383	378
11390	298
11391	298
11392	298
11398	341
11430	343
11431	343
11443	378
12075	331
12382	381
13009	100
13011	400
13014	102
13018	100
13023	381
13030	100
13033	111
13034	102
13038	400
13048	101
13055	110
13056	110
13069	100
13075	160
13080	373
13094	110
13101	109
13102	109
13105	110
13106	108
13107	110
13108	150
13112	109
13122	381
13129	109
13131	161
13140	250
13147	110
13150	109
13152	371
13153	110
13154	110
13159	110
13161	114
13168	230

BBB Number	PLUG
13171	230
13174	110
13184	320
13185	320
13186	320
13187	320
13188	331
13189	333
13190	331
13196	300
13197	300
13210	353
13211	300
13212	330
13214	282
13216	381
13218	109
13225	404
13227	300
13229	280
13230	301
13231	300
13234	280
13235	381
13236	371
13237	300
13238	300
13239	280
13240	280
13241	280
13242	381
13243	381
13244	381
13245	320
13246	381
13247	381
13248	371
13249	300
13250	300
13251	300
13252	286
13254	272
13255	282
13257	300
13259	192
13260	381

BBB Number	PLUG
13261	300
13262	300
13263	191
13265	282
13266	294
13268	381
13269	381
13270	381
13271	300
13272	300
13273	300
13275	351
13276	280
13277	280
13278	280
13280	320
13281	381
13282	300
13285	300
13286	300
13287	300
13289	300
13290	300
13292	192
13293	300
13294	290
13295	300
13297	300
13298	301
13299	300
13300	360
13302	320
13303	300
13307	320
13309	320
13311	320
13314	300
13315	320
13316	282
13317	320
13319	280
13320	381
13321	280
13323	280
13324	300
13325	294

BBB Number	PLUG
13326	292
13327	300
13329	300
13330	316
13331	280
13332	300
13334	300
13335	300
13336	282
13337	300
13338	280
13339	280
13341	320
13349	370
13350	300
13351	300
13352	300
13354	320
13355	381
13356	381
13356-6S	381
13357	381
13359	381
13359-8S	381
13360	381
13361	381
13362	381
13363	381
13364	381
13365	381
13366	381
13367	381
13368	381
13369	381
13370	381
13371	381
13372	381
13373	381
13374	381
13375	371
13376	381
13378	381
13379	371
13380	361
13380-7S	361
13381	361

BBB Number	PLUG
13381-7S	361
13382	361
13382-7S	361
13383	280
13384	280
13385	280
13386	290
13387	290
13389	280
13390	280
13391	282
13392	280
13393	280
13395	294
13396	280
13397	280
13398	280
13399	381
13405	381
13406	300
13407	280
13408	280
13409	312
13410	280
13411	280
13413	280
13414	282
13415	282
13417	381
13419	370
13421	370
13422	381
13423	282
13424	282
13429	272
13430	300
13432	300
13433	292
13434	192
13435	300
13436	381
13440	280
13442	320
13443	285
13444	285
13445	300

BBB Number	PLUG
13446	300
13447	330
13448	331
13449	300
13450	300
13451	300
13454	280
13455	280
13456	280
13457	312
13458	361
13458-7S	361
13459	300
13460	300
13462	381
13464	381
13465	381
13466	381
13467	381
13468	381
13469	381
13470	381
13471	381
13473	300
13474	300
13477	300
13478	300
13479	300
13480	300
13482D	311
13483D	311
13485	312
13486	312
13492	312
13495	312
13496	312
13497	312
13498	287
13499	312
13500	312
13501	312
13502	312
13503	312
13506	294
13507	294
13508	294

BBB Number	PLUG
13509	294
13511	300
13512	312
13519	370
13520	380
13521	282
13522	282
13523	300
13524	282
13525	280
13526	381
13529	294
13531	300
13533	300
13534	300
13535	300
13536	312
13537	312
13538	294
13539	294
13540	294
13541	380
13542	380
13545	312
13546	312
13547	312
13548	370
13549	300
13551	312
13552	312
13553	312
13556	312
13557	312
13558	312
13559	300
13562	280
13564	350
13564-70	350
13566	280
13569	282
13574	300
13575	302
13577	302
13578	285
13580	302
13582	307

BBB Number	PLUG
13584	300
13585	307
13586	307
13587	307
13592	285
13593	285
13594	285
13595	302
13596	300
13597	300
13598	300
13602	381
13603	381
13604	381
13605	361
13606	361
13607	371
13608	294
13609	381
13610	381
13612	306
13613	381
13614	300
13615	300
13616	300
13617	381
13618	381
13619	381
13622	361
13623	381
13624	381
13626	361
13628	381
13631	381
13632	380
13636	300
13637	300
13638	300
13639	306
13640	300
13641	300
13642	300
13643	300
13644	300
13645	300
13646	300

BBB Number	PLUG
13648	294
13649	296
13650	300
13655	361
13656	361
13657	306
13658	361
13660	381
13664	381
13668	312
13669	312
13670	312
13671	312
13673	312
13674	296
13675	295
13677	296
13679	318
13680	318
13684	294
13685	290
13687	312
13688	312
13689	300
13690	282
13692	300
13700	292
13701	300
13702	300
13703	300
13705	282
13706	312
13707	110
13709	381
13710	381
13710-8S	381
13711	312
13712	305
13713	300
13715	312
13716	300
13717	300
13718	303
13719	303
13720	315
13721	314

BBB Number	PLUG
13722	296
13723	300
13724	300
13725	381
13726	381
13727	381
13728	300
13729	335
13730	300
13731	300
13732	312
13733	381
13734	335
13735	362
13736	381
13737	296
13738	295
13739	317
13740	317
13741	285
13742	320
13743	296
13744	352
13745	352
13746	320
13747	312
13748	312
13749	300
13750	307
13751	307
13752	300
13753	318
13754	312
13755	312
13756	312
13757	352
13758	318
13759	312
13760	300
13761	335
13762	296
13763	363
13764	302
13765	285
13766	363
13767	296

BBB Number	PLUG
13769	296
13770	314
13771	314
13772	381
13773	381
13773B	381
13774	335
13775	352
13776	296
13777	363
13778	300
13779	381
13780	318
13781	318
13782	300
13783	307
13784	300
13785	300
13786	300
13787	307
13788	303
13789	300
13790	363
13791	312
13792	381
13793	381
13794	312
13795	318
13796	312
13797	381
13798	381
13799	373
13800	380
13801	371
13802	371
13803	381
13804	365
13805	381
13806	312
13807	381
13808	381
13809	363
13811	381
13812	381
13818	381
13819	381

BBB Number	PLUG
13820	319
13821	300
13822	363
13823	363
13824	363
13825	300
13826	306
13827	300
13828	300
13829	319
13832	361
13834	363
13835	296
13836	296
13839	300
13840	307
13842	363
13844	312
13845	371
13846	335
13851	367
13852	367
13853	367
13856	312
13857	321
13858	312
13859	312
13860	314
13862	300
13863	300
13864	314
13865	314
13866	314
13867	362
13868	363
13869	363
13870	362
13871	362
13872	363
13873	363
13873CP	363
13874	363
13875	318
13876	363
13877	363
13878	312

BBB Number	PLUG
13879	312
13880	363
13883	303
13885	312
13886	307
13887	307
13889	319
13893	296
13894	296
13895	303
13896	321
13898	307
13903	361
13906	363
13908	295
13909	295
13910	363
13911	363
13912	363
13913	363
13914	363
13915	363
13916	363
13918	296
13919	314
13920	363
13923	363
13924	363
13929	307
13935	352
13937	300
13938	323
13942	367
13943	314
13944	314
13946	367
13949	300
13950	318
13956	312
13958	312
13959	312
13961	363
13963	312
13964	363
13966	296
13967	307

BBB Number	PLUG
13969	322
13969CP	322
13970	335
13971	335
13977	296
13978	342
13980	296
13981	295
13982	318
13983	295
13984	295
13985	363
13988	363
13993	322
13995	362
13996	303
13999	363
14000	381
14001	367
14014	107
14022	110
14029	110
14030	110
14037	110
14045	161
14048	110
14050	120
14054	381
14056	381
14062	100
14068	280
14070	113
14071	110
14085	120
14088	110
14092	381
14094	404
14095	381
14105	190
14119	190
14129	140
14130	140
14151	140
14185	191
14194	130
14196	130

BBB Number	PLUG
14197	140
14198	140
14199	130
14207	130
14214	190
14222	190
14227	401
14231	191
14234	130
14237	130
14241	300
14242	300
14243	300
14255	191
14263	100
14267	192
14268	192
14273	230
14274	231
14275	251
14281	100
14291	100
14293	181
14294	181
14295	180
14298	100
14303	191
14305	190
14306	190
14307	192
14327	270
14331	270
14336	261
14340	251
14341	261
14342	240
14345	261
14347	261
14366	230
14375	251
14384	251
14392	109
14395	371
14396	381
14401	110
14402	110

BBB Number	PLUG
14406	110
14408	110
14410	110
14412	110
14418	381
14420	381
14421	109
14427	300
14428	300
14430	300
14431	192
14432	300
14434	192
14436	300
14438	300
14445	192
14449	280
14453	340
14460	280
14461	280
14463	242
14472	280
14535	190
14539	113
14540	140
14552	260
14557	192
14561	381
14565	370
14571	192
14573	251
14574	261
14576	240
14582	270
14583	369
14585	191
14587	191
14588	191
14592	191
14593	241
14594	405
14595	109
14597	192
14601	192
14602	405
14603	381

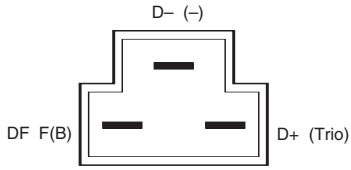
BBB Number	PLUG
14605	371
14609	409
14610	404
14611	280
14613	221
14615	220
14630	242
14643	280
14644	230
14645	210
14646	192
14648	200
14649	200
14650	192
14651	300
14652	191
14653	221
14655	300
14657	191
14659	300
14660	300
14661	300
14665	191
14667	242
14668	280
14671	280
14672	280
14674	280
14676	242
14679	280
14680	290
14683	280
14684	282
14690	192
14698	192
14700	192
14701	192
14702	192
14703	192
14706	192
14709	192
14716	300
14717	300
14718	300
14719	300
14720	300

BBB Number	PLUG
14723	300
14724	300
14725	300
14731	200
14732	282
14733	282
14739	284
14742	191
14743	191
14745	191
14749	300
14753	300
14755	284
14756	280
14757	282
14759	292
14761	241
14765	381
14778	380
14779	110
14781	109
14782	381
14783	381
14785	381
14787	271
14789	320
14791	381
14799	381
14810	381
14813	381
14814	381
14818	381
14820	110
14821	380
14822	380
14824	110
14825	381
14843	280
14849	280
14855	280
14857	280
14859	350
14869	320
14876	192
14891	270
14892	406

BBB Number	PLUG
14894	272
14895	270
14899	270
14900	270
14902	192
14903	192
14905	300
14906	192
14910	192
14916	192
14917	192
14931	290
14935	280
14937	284
14939	280
14943	192
14944	381
14946	109
14952	220
14954	272
14955	272
14956	381
14959	270
14960	350
14964	381
14965	109
14967	193
14969	110
14970	381
14972	381
14979	300
14988	381
14989	294
14990	101
14991	373
14995	381
14997	381
21485	367
22096	240
23901	367

PLUG CODE GUIDE


Plug Code 100



Terminal Markings
 D+ Trio (Lamp)
 D- Negative
 DF Field (B)

Reg. Type
 ER

Plug Code 107



Terminal Markings
 B+ Positive
 B- Negative
 IND Lamp
 S Sense Terminal when Battery Sense
 D Dummy Terminal when Machine Sense

Reg. Type
 IR


Plug Code 110



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR


Plug Code 101



Terminal Markings
 D+ Trio (Lamp)
 D- Negative
 DF Field (B)

Reg. Type
 ER


Plug Code 108



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR

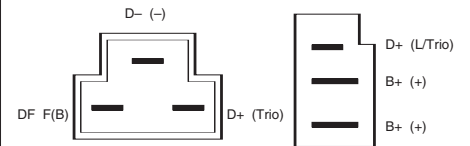
Plug Code 111



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)
 D- Negative
 DF Field (B)

Reg. Type
 ER

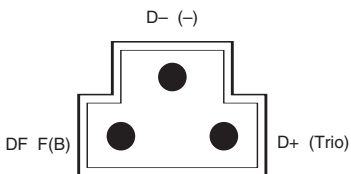
Plug Code 102



Terminal Markings
 D+ Trio (Lamp)
 D- Negative
 DF Field (B)

Reg. Type
 ER


Plug Code 109



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR

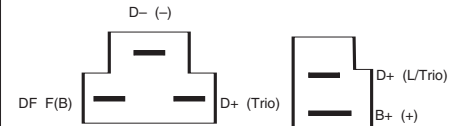Plug Code 112




Terminal Markings
 B+ Positive
 D+ Trio (Lamp)
 D- Negative
 DF Field

Reg. Type
 ER

PLUG CODE GUIDE

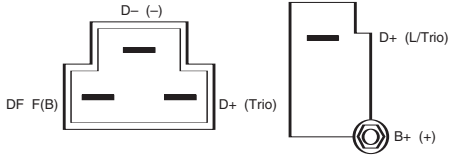Plug Code 113




Terminal Markings

B+ Positive
D+ Trio (Lamp)
D- Negative
DF Field (B)

Reg. Type

ER

Plug Code 130




Terminal Markings

A Positive
E Negative
F Field (B)
N Stator

Reg. Type

ER

Plug Code 150




Terminal Markings

R Trio (Lamp)

Reg. Type

IR

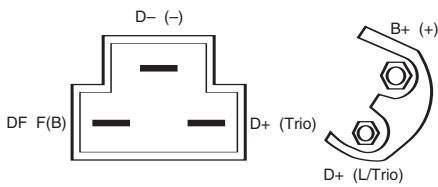Plug Code 114



Terminal Markings

B+ Positive
D+ Trio (Lamp)
D- Negative
DF Field (B)

Reg. Type

ER

Plug Code 140




Terminal Markings

E Negative
F Field (B)
N Stator

Reg. Type

ER

Plug Code 151




Terminal Markings

1 Ignition (Lamp)
2 Battery Sense

Reg. Type

IR

Plug Code 120




Terminal Markings

B+ Positive
D+ Trio (Lamp)
S Sense (+)

Reg. Type

IR

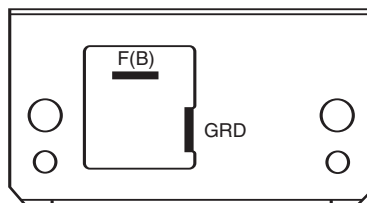Plug Code 149




Terminal Markings

F Field (B)
GRD Ground

Reg. Type

ER

Plug Code 155












Terminal Markings

1 Trio/Lamp
2 Sense
3 FR
(Field Monitor - Computer)










Reg. Type

IR


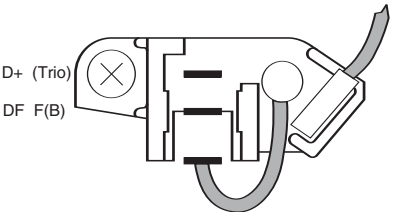


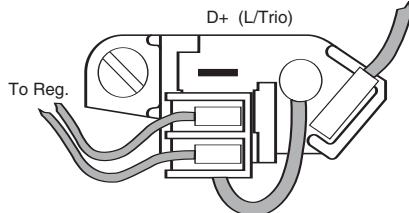




PLUG CODE GUIDE

Plug Code 160		Plug Code 180		Plug Code 191	
					
Terminal Markings	Reg. Type	Terminal Markings	Reg. Type	Terminal Markings	Reg. Type
#30 Stator #67 Field (B)	ER	D+ Trio (Lamp) DF Field	ER	L Trio (Lamp) S Sense (+)	IR
Plug Code 161		Plug Code 181		Plug Code 192	
					
Terminal Markings	Reg. Type	Terminal Markings	Reg. Type	Terminal Markings	Reg. Type
#30 Trio #67 Field (B)	ER	D+ Trio (Lamp)	IR	L Trio (Lamp) R Ignition (+)	IR
Plug Code 170		Plug Code 190		Plug Code 193	
					
Terminal Markings	Reg. Type	Terminal Markings	Reg. Type	Terminal Markings	Reg. Type
#30 Trio D+ Trio (Lamp)	ER	F Field (B) N Stator	ER	IG Ignition (+) L Trio (Lamp)	IR





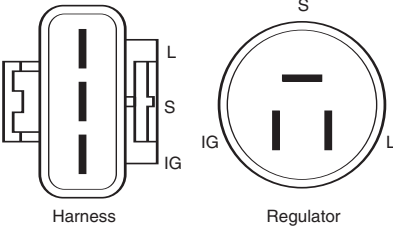


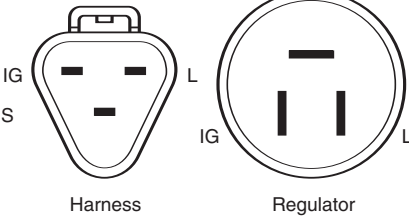

PLUG CODE GUIDE

Plug Code 194		Plug Code 220		Plug Code 231	
					
Terminal Markings F Field (B) S Stator	Reg. Type ER	Terminal Markings L Trio (Lamp) S Sense (+)	Reg. Type IR	Terminal Markings E Negative F Field (A) L Trio (Lamp)	Reg. Type ER
Plug Code 200		Plug Code 221		Plug Code 240	
					
Terminal Markings IG Ignition (+) L Trio (Lamp) S Sense (+)	Reg. Type IR	Terminal Markings L Trio (Lamp) R Ignition (+) S Sense (+)	Reg. Type IR	Terminal Markings E Negative F Field (B) N Stator	Reg. Type ER
Plug Code 210		Plug Code 230		Plug Code 241	
					
Terminal Markings IG Ignition (+) L Trio (Lamp) S Sense (+)	Reg. Type IR	Terminal Markings E Negative F Field (B) N Stator	Reg. Type ER	Terminal Markings E Negative F Field (A) P Stator	Reg. Type ER










PLUG CODE GUIDE

<p>Plug Code 242</p>  <p>Terminal Markings IG Ignition (+) L Trio (Lamp) S Sense (+)</p> <p>Reg. Type IR</p>	<p>Plug Code 255</p>  <p>Terminal Markings IG Ignition (+) L Trio (Lamp)</p> <p>Reg. Type IR</p>	<p>Plug Code 270</p>  <p>Terminal Markings + Sense (+) L Lamp</p> <p>Reg. Type IR</p>
<p>Plug Code 250</p>  <p>Terminal Markings IG Ignition (+) N Stator</p> <p>Reg. Type IR</p>	<p>Plug Code 260</p>  <p>Terminal Markings E Negative F Field (A) L Trio (Lamp)</p> <p>Reg. Type ER</p>	<p>Plug Code 271</p>  <p>Terminal Markings D+ Field (+) DF Field (-)</p> <p>Reg. Type ER</p>
<p>Plug Code 251</p>  <p>Terminal Markings IG Ignition (+) L Trio (Lamp)</p> <p>Reg. Type IR</p>	<p>Plug Code 261</p>  <p>Terminal Markings IG Ignition (+) L Trio (Lamp) S Sense (+)</p> <p>Reg. Type IR</p>	<p>Plug Code 272</p>  <p>Terminal Markings L Trio (Lamp)</p> <p>Reg. Type IR</p>

PLUG CODE GUIDE


Plug Code 280	Plug Code 285	Plug Code 290
		
<p>Terminal Markings</p> <ul style="list-style-type: none"> IG Ignition (+) L Lamp S Sense (+) <p>Reg. Type IR</p> <p>CAUTION: L-Terminal Must Be Tested</p>	<p>Terminal Markings</p> <ul style="list-style-type: none"> F Field (+) F Field (-) <p>Reg. Type ER</p>	<p>Terminal Markings</p> <ul style="list-style-type: none"> FR Computer (Field Monitor) IG Ignition (+) L Lamp S Sense (+) <p>Reg. Type IR</p>
Plug Code 282	Plug Code 286	Plug Code 292
		
<p>Terminal Markings</p> <ul style="list-style-type: none"> D Dummy IG Ignition (+) L Lamp <p>Reg. Type IR</p> <p>CAUTION: L-Terminal Must Be Tested</p>	<p>Terminal Markings</p> <ul style="list-style-type: none"> IG Ignition (+) L Lamp S Sense (+) <p>Reg. Type IR</p>	<p>Terminal Markings</p> <ul style="list-style-type: none"> FR Computer (Field Monitor) G or IG Ignition (+) L Lamp <p>Reg. Type IR</p>
Plug Code 284	Plug Code 287	Plug Code 294
		
<p>Terminal Markings</p> <ul style="list-style-type: none"> C Computer IG Ignition (+) L Lamp <p>Reg. Type IR</p>	<p>Terminal Markings</p> <ul style="list-style-type: none"> IG Ignition (+) L Lamp S Sense (+) <p>Reg. Type IR</p>	<p>Terminal Markings</p> <ul style="list-style-type: none"> C Computer FR Computer (Field Monitor) IG Ignition (+) L Lamp <p>Reg. Type IR</p>

PLUG CODE GUIDE

<p align="center">Plug Code 295</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>FR</td> <td>Computer (Field Monitor)</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>IG</td> <td>Ignition (+)</td> <td></td> <td></td> </tr> <tr> <td>L</td> <td>Lamp</td> <td></td> <td></td> </tr> <tr> <td>S</td> <td>Sense (+)</td> <td></td> <td></td> </tr> </table>	FR	Computer (Field Monitor)	Reg. Type	IR	IG	Ignition (+)			L	Lamp			S	Sense (+)			<p align="center">Plug Code 301</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>A</td> <td>Sense (+)</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>I</td> <td>Lamp</td> <td></td> <td></td> </tr> </table>	A	Sense (+)	Reg. Type	IR	I	Lamp			<p align="center">Plug Code 305</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>C</td> <td>Computer</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>L</td> <td>Lamp</td> <td></td> <td></td> </tr> <tr> <td>S</td> <td>Sense</td> <td></td> <td></td> </tr> </table>	C	Computer	Reg. Type	IR	L	Lamp			S	Sense		
FR	Computer (Field Monitor)	Reg. Type	IR																																			
IG	Ignition (+)																																					
L	Lamp																																					
S	Sense (+)																																					
A	Sense (+)	Reg. Type	IR																																			
I	Lamp																																					
C	Computer	Reg. Type	IR																																			
L	Lamp																																					
S	Sense																																					
<p align="center">Plug Code 296</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>C</td> <td>Computer</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>FR</td> <td>Computer (Field Monitor)</td> <td></td> <td></td> </tr> <tr> <td>IG</td> <td>Ignition (+)</td> <td></td> <td></td> </tr> <tr> <td>L</td> <td>Lamp / Trio</td> <td></td> <td></td> </tr> </table>	C	Computer	Reg. Type	IR	FR	Computer (Field Monitor)			IG	Ignition (+)			L	Lamp / Trio			<p align="center">Plug Code 302</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>F</td> <td>Field (+)</td> <td>Reg. Type</td> <td>ER</td> </tr> <tr> <td>F</td> <td>Field (-)</td> <td></td> <td></td> </tr> </table>	F	Field (+)	Reg. Type	ER	F	Field (-)			<p align="center">Plug Code 306</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>L</td> <td>Lamp</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>S</td> <td>Sense</td> <td></td> <td></td> </tr> </table>	L	Lamp	Reg. Type	IR	S	Sense						
C	Computer	Reg. Type	IR																																			
FR	Computer (Field Monitor)																																					
IG	Ignition (+)																																					
L	Lamp / Trio																																					
F	Field (+)	Reg. Type	ER																																			
F	Field (-)																																					
L	Lamp	Reg. Type	IR																																			
S	Sense																																					
<p align="center">Plug Code 300</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>L</td> <td>Lamp (Trio)</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>S</td> <td>Sense (+)</td> <td></td> <td></td> </tr> </table> <p>"L" is a Trio (Lamp) on most alternators. Some late model alternators, "L" is Lamp only.</p>	L	Lamp (Trio)	Reg. Type	IR	S	Sense (+)			<p align="center">Plug Code 303</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>D</td> <td>Driver (Computer)</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>P</td> <td>Stator</td> <td></td> <td></td> </tr> </table>	D	Driver (Computer)	Reg. Type	IR	P	Stator			<p align="center">Plug Code 307</p>  <p>Terminal Markings</p> <table border="0"> <tr> <td>F</td> <td>Computer (FR - Field Monitor)</td> <td>Reg. Type</td> <td>IR</td> </tr> <tr> <td>G</td> <td>Computer</td> <td></td> <td></td> </tr> <tr> <td>L</td> <td>Lamp (Trio)</td> <td></td> <td></td> </tr> <tr> <td>S</td> <td>Sense (+)</td> <td></td> <td></td> </tr> </table>	F	Computer (FR - Field Monitor)	Reg. Type	IR	G	Computer			L	Lamp (Trio)			S	Sense (+)						
L	Lamp (Trio)	Reg. Type	IR																																			
S	Sense (+)																																					
D	Driver (Computer)	Reg. Type	IR																																			
P	Stator																																					
F	Computer (FR - Field Monitor)	Reg. Type	IR																																			
G	Computer																																					
L	Lamp (Trio)																																					
S	Sense (+)																																					

PLUG CODE GUIDE

Plug Code 309



P L F S
(ST) (FR)


Terminal Markings

F Field Monitor
L Lamp
P Stator
S Sense (+)

Reg. Type

IR

Plug Code 312



S
IG
L

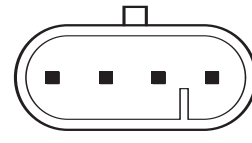
Terminal Markings

IG Ignition (+)
L Lamp
S Sense (+)

Reg. Type

IR

Plug Code 315



S D L D


Terminal Markings

D Dummy
L Lamp
S Sense (+)

Reg. Type

IR

Plug Code 310



P L I S
(ST) (IG)


Terminal Markings

I Ignition (+)
L Lamp
P Stator
S Sense (+)

Reg. Type

IR

Plug Code 313



P L I S
(ST) (IG)


Terminal Markings

I Ignition (+)
L Lamp
P Stator
S Sense (+)

Reg. Type

IR

Plug Code 316



F or FR
G or IG
L

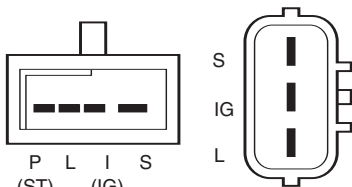
Terminal Markings

F or FR Computer
(FR - Field Monitor)
G or IG Ignition
L Lamp

Reg. Type

IR

Plug Code 311



P L I S
(ST) (IG)

Regulator

S
IG
L

Harness

Terminal Markings

I Ignition (+)
IG Ignition (+)
L Lamp
P Stator
S Sense (+)

Reg. Type

IR

Plug Code 314



P L F S
(ST) (FR)


Terminal Markings

F Field Monitor
L Lamp
P Stator
S Sense (+)

Reg. Type

IR

Plug Code 317



C
IG
L










Terminal Markings

C Computer
IG Ignition (+)
L Lamp

Reg. Type


IR

PLUG CODE GUIDE

<p>Plug Code 318</p>  <p>D G or IG L</p> <p>Terminal Markings D Dummy G or IG Ignition (+) L Lamp</p> <p>Reg. Type IR</p>	<p>Plug Code 321</p>  <p>M IG L</p> <p>Terminal Markings M FR IG Ignition L Light</p> <p>Reg. Type IR</p>	<p>Plug Code 332</p>  <p>A (+) S (ST) I (L/IG)</p> <p>Terminal Markings A Sense (+) I Lamp S Stator</p> <p>Reg. Type IR</p>
<p>Plug Code 319</p>  <p>D S L</p> <p>Terminal Markings D Dummy S Sense L Lamp</p> <p>Reg. Type IR</p>	<p>Plug Code 330</p>  <p>A (+) S (ST) I (L/IG)</p> <p>Terminal Markings A Sense (+) I Lamp S Stator</p> <p>Reg. Type IR</p>	<p>Plug Code 333</p>  <p>A (S) S (L/IG) I (L/IG)</p> <p>Terminal Markings A Sense (+) I Lamp/Ignition S Lamp/Ignition</p> <p>Reg. Type IR</p>
<p>Plug Code 320</p>  <p>F(1) F(2)</p> <p>Terminal Markings F Field (+) F Field (-)</p> <p>Reg. Type ER</p>	<p>Plug Code 331</p>  <p>A (S) (D) I (L/IG)</p> <p>Terminal Markings A Sense (+) I Lamp</p> <p>Reg. Type IR</p>	<p>Plug Code 335</p>  <p>D or No Pin L IG</p> <p>Terminal Markings D Dummy L Lamp IG Ignition</p> <p>Reg. Type IR</p>

PLUG CODE GUIDE

Plug Code 336




Terminal Markings

+ B+
D Dummy
L/IG Ignition

Reg. Type

IR

Plug Code 340




Terminal Markings

E Negative
F Field (A)
P Stator

Reg. Type

ER

Plug Code 352




Terminal Markings

C Computer
IG Ignition (+)
L Lamp
S Sense (+)

Reg. Type

IR

Plug Code 337



Terminal Markings

+ B+
FR Frequency
SIG Signal

Reg. Type

IR

Plug Code 350




Terminal Markings

IG Ignition (+)
L Lamp
S Sense (+)

Reg. Type

IR

Plug Code 353




Terminal Markings

D Dummy
L Lamp
S Sense

Reg. Type

IR

Plug Code 338



Terminal Markings

L/IG Ignition
FR Frequency
+ B+

Reg. Type

IR

Plug Code 351




Terminal Markings

D Dummy
IG Ignition (+)
L Lamp
S Sense (+)

Reg. Type

IR

Plug Code 360













Terminal Markings

L Lamp
S Sense (+)

Reg. Type


IR

PLUG CODE GUIDE

Plug Code 361		Plug Code 364		Plug Code 369	
		 <p style="text-align: center;">Plug Code 364</p>		 <p style="text-align: center;">EXC F(B)</p>	
<p>Terminal Markings</p> <p>D+ Lamp W Stator</p>	<p>Reg. Type</p> <p style="text-align: center;">IR</p>	<p>Terminal Markings</p> <p>D Dummy L Lamp</p>	<p>Reg. Type</p> <p style="text-align: center;">IR</p>	<p>Terminal Markings</p> <p>EXC Field (B)</p>	<p>Reg. Type</p> <p style="text-align: center;">ER</p>
Plug Code 362		Plug Code 365		Plug Code 370	
					
<p>Terminal Markings</p> <p>F Field (+) F Field (-)</p>	<p>Reg. Type</p> <p style="text-align: center;">ER</p>	<p>Terminal Markings</p> <p>FR Computer (Field Monitor) L Lamp</p>	<p>Reg. Type</p> <p style="text-align: center;">IR</p>	<p>Terminal Markings</p> <p>D+ Lamp</p>	<p>Reg. Type</p> <p style="text-align: center;">IR</p>
Plug Code 363		Plug Code 366		Plug Code 371	
				 <p style="text-align: center;">D+ (L/Trio)</p>  <p style="text-align: center;">B+ (+)</p>	
<p>Terminal Markings</p> <p>F Field (+) F Field (-)</p>	<p>Reg. Type</p> <p style="text-align: center;">ER</p>	<p>Terminal Markings</p> <p>D+ Lamp DF Field</p>	<p>Reg. Type</p> <p style="text-align: center;">IR</p>	<p>Terminal Markings</p> <p>B+ Positive D+ Trio (Lamp)</p>	<p>Reg. Type</p> <p style="text-align: center;">IR</p>

PLUG CODE GUIDE


Plug Code 372



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR


Plug Code 376



Terminal Markings
 F Field (+)
 F Field (-)

Reg. Type
 ER


Plug Code 400



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)
 DF Field (B)

Reg. Type
 ER


Plug Code 373



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR


Plug Code 380



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR


Plug Code 401



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)
 D- Negative
 DF Field (B)

Reg. Type
 ER


Plug Code 375



Terminal Markings
 F Field (+)
 F Field (-)

Reg. Type
 ER


Plug Code 381



Terminal Markings
 B+ Positive
 D+ Trio (Lamp)

Reg. Type
 IR

Plug Code 402




Terminal Markings
 B+ Positive
 D- Negative
 DF Field (B)

Reg. Type
 ER


PLUG CODE GUIDE

Plug Code 403




Terminal Markings		Reg. Type
B+	Positive	ER
D+	Trio (Lamp)	
D-	Negative	
DF	Field (B)	

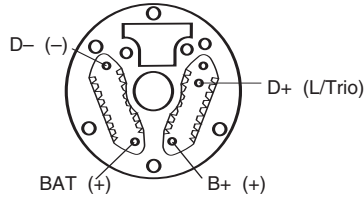Plug Code 406




Terminal Markings		Reg. Type
B+	Positive	IR
D+	Trio (Lamp)	
D-	Negative	

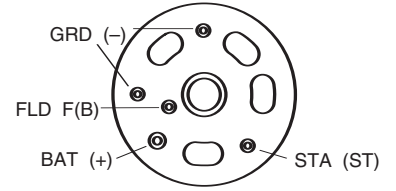Plug Code 410




Terminal Markings		Reg. Type
BAT	Battery (output)	ER
FLD	Field (B)	
GRD	Ground	
STA	Stator	

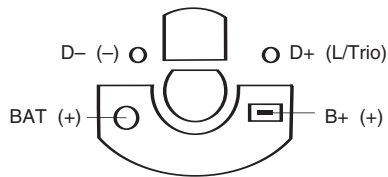Plug Code 404




Terminal Markings		Reg. Type
B+	Positive	IR
D+	Trio (Lamp)	
D-	Negative	

Plug Code 407




Terminal Markings		Reg. Type
B+	Positive	ER
D/61	B+ (Before Isolation Diode)	
D-	Negative	
DF	Field	

Plug Code 405



Terminal Markings		Reg. Type
B+	Positive	IR
D+	Trio (Lamp)	
D-	Negative	

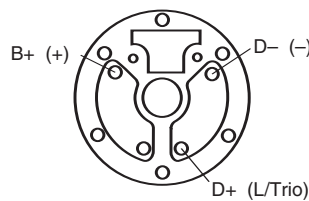Plug Code 409



Terminal Markings		Reg. Type
B+	Positive	IR
D+	Trio (Lamp)	
D-	Negative	