

# DS18<sup>®</sup>


PRO

PRO-DKH1X

## TITANIUM COMPRESSION DRIVER AND ALUMINUM HORN KIT

Peak Power Handling: 640 Watts  
Program Power Handling: 320 Watts  
AES Rated Power: 160 Watts  
Sensitivity (1w/1m): 115dB  
Frequency Response: 630Hz-20KHz  
Nominal Impedance: 8 ohm  
Throat Diameter: 2"  
Recommended Hi Pass Crossover: 900Hz  
Voice Coil Diameter: 2.03"  
Diaphragm Material: Titanium  
Magnet Material: Ferrite  
Magnet Weight: 35 oz  
Bolt Type: Bolt-on

SPL vs Freq

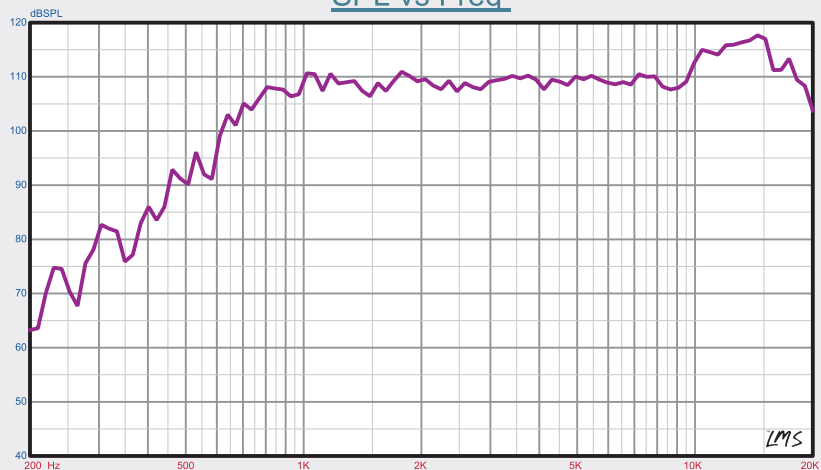

# DS18<sup>®</sup>

PRO

## PRO-DKH1X

### 2.03" VC

TITANIUM COMPRESSION DRIVER  
AND ALUMINUM HORN KIT



640W  
Peak Power

320W  
Program Power


8 OHMS

# PRO-DKH1X

TITANIUM COMPRESSION DRIVER  
AND ALUMINUM HORN KIT



## Data Sheet

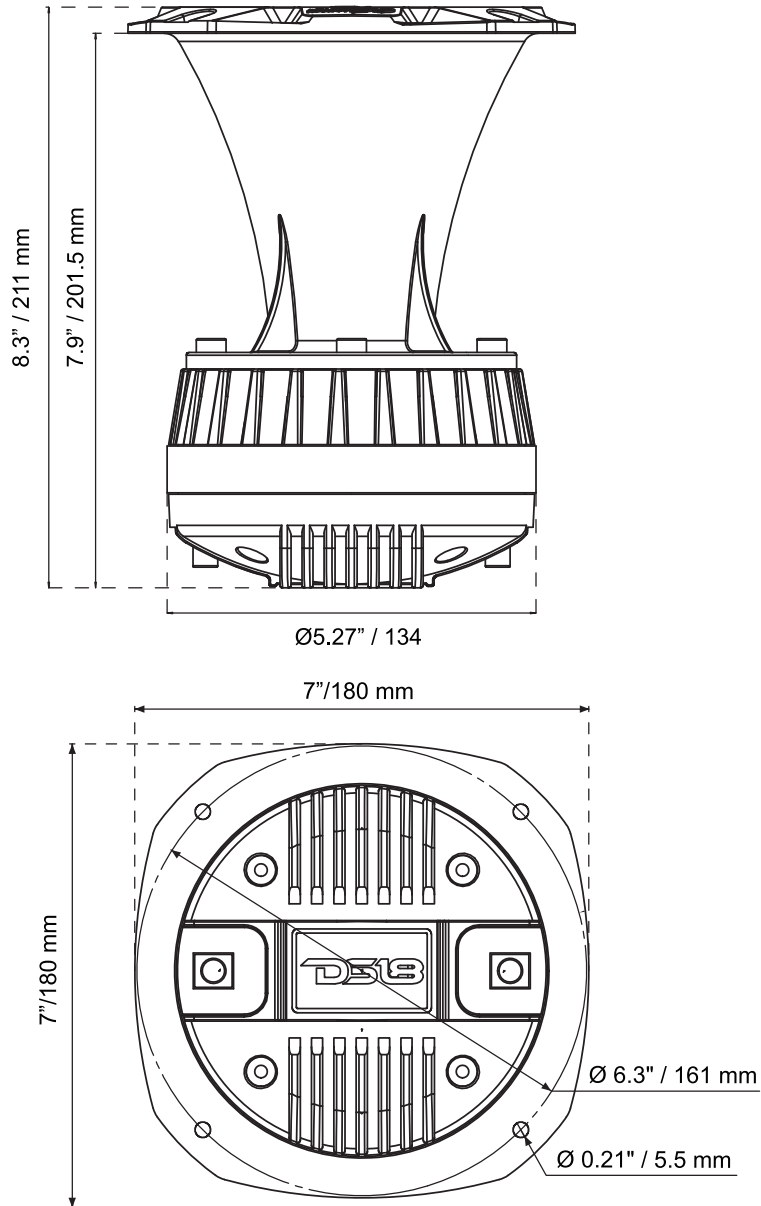

PRO-DKH1X TITANIUM COMPRESSION DRIVER AND ALUMINUM HORN KIT

### Specifications:

Throat Diameter .....	2" / 50.8mm
Installation Type.....	Bolt-on
Nominal Impedance .....	8 OHMS
Peak Power Handling .....	640W
Program Power Handling .....	320W
AES Power Handling .....	160W
Sensitivity (1w/1m) .....	115 dB
Frequency Response .....	630Hz-20KHz
Recommended HI Pass Crossover .....	900 Hz

### Motor

Voice Coil Diameter.....	2.03" / 51mm
Voice Coil Former Material .....	Kapton
Winding Material .....	CCA
Diaphragm Material .....	Titanium
Magnet Material.....	Ferrite
Magnet Weight .....	35oz

### Measurements

Overall Diameter .....	7" / 180 mm
Overall Depth .....	8.3" / 211 mm
Bolt Pattern/Type.....	5.5mm hole - 6.3" / 161 mm Diameter
Mounting Depth .....	7.9" / 201.5mm
Mounting Hole Diameter.....	5.7" / 145mm

View [other car speakers](#) made by [DS18](#) on our website.

