



TE-CDVR-4 **4-CHANNEL PRO COMMERCIAL DVR**

PRODUCT OVERVIEW

Our iBeam Pro Commercial DVR stores potentially vital video footage related to traffic collisions, or other incidents. The DVR supports up to a 256GB microSD card, providing ample storage capabilities for simultaneous recording of up to four separate camera feeds. Designed for commercial use, the microSD card is concealed behind a key-locked security door, to prevent tampering with video evidence. Video files can also be backed up via USB.

- Commercial grade DVR
- Records up to 4 channels simultaneously
- Supports up to 256GB microSD card, secured behind a key-locked security door
- Supports USB backup of video files
- Supports camera resolutions up to 720p
- Includes 4-Pin DIN inputs for four camera feeds
- Video output for setup and video playback
- iBeam SD card sold separately (TE-16SD)

TE-CDVR-4 AND TE-CDVR-G



FEATURES:

- Built-in high performance Hisilicon chipsets, coded with H.264 standard, high compression rate and image quality
- 4CH AV Inputs with AHD 720P/960H/D1/CIF optional, 1CH synchronized AV output, 1CH VGA output
- 4CH local recording with 720P resolution in real time

Power:

- Professional In-Vehicle power design, 9-32V DC Wide Voltage Range
- Multi protection circuits like under-voltage, short, reversed plug-in
- Smart power management system, shutdown under low voltage, low consumption when standby

Data Storage:


- Special file management system to encrypt and protect the data
- Proprietary technology to detect the bad track of the SD card which can make sure the continuity of video and long service life of the SD card
- Built-in ultra-capacitor, avoid data loss and SD card damage caused by sudden outage
- Support SD card storage, maximum 256G

Technical parameter:

Item	Device parameter	Performance
System	Main processor	Hi3520DV200
	Operating system	Embedded Linux OS
	Operating language	Chinese/English
	Operating interface	GUI, Support mouse
	Password security	User password/Admin password
Audio & Video	Video standard	PAL/NTSC
	Video compression	H.264
	Image resolution	720P /960H/D1/CIF
	Playback quality	720P /960H/D1/CIF
	Compound mode	4ch 720P/4ch 960H/2ch 720P+2ch 960H
	Decoding ability	1ch 720P real time
	Recording quality	Class 1-6 optional
	Image display	Single/QUAD display optional
	Audio Compression	G.726
	Audio recording	Audio & Video synchronized recording
Recording & Playback	Recording mode	Manual/Alarm
	Video bit rate	Full frame 4096Mbps, 6 classes image quality optional
	Audio bit rate	8KB/s
	Storage media	SD card storage
	Video inquiry	Inquiry by channel/Recording type
Firmware upgrading	Local playback	Playback by file
	Upgrading mode	Manual/Automatic/Remote
	Upgrading method	USB disk/Wireless network
Interface	AV input	4ch aviation interface
	AV output	1ch VGA video output, 1ch aviation AV output
	Alarm input	4 digital inputs (2 Positive trigger, 2 negative trigger)
	SD card	1 SDXC High speed card (up to 256G)
	USB interface	1 USB 2.0 (support U disk/mouse)
	Ignition input	1 ACC signal
	UART	1 LVTTTL Level
	LED Indication	PWR/RUN/SD/ALM
	SD card lock	1
	Debug port	1

Others	Power input	9~32V DC
	Power output	5V 300mA
	Power consumption	Standby 3mA Maximum consumption 18W @12V 1.5A @24V 0.75A
	Working temperature	-20 --- 70°C
	Storage	720P 1G/h/channel 960H 750M/h/channel
	Dimension	142*152*32 mm

Front Panel:

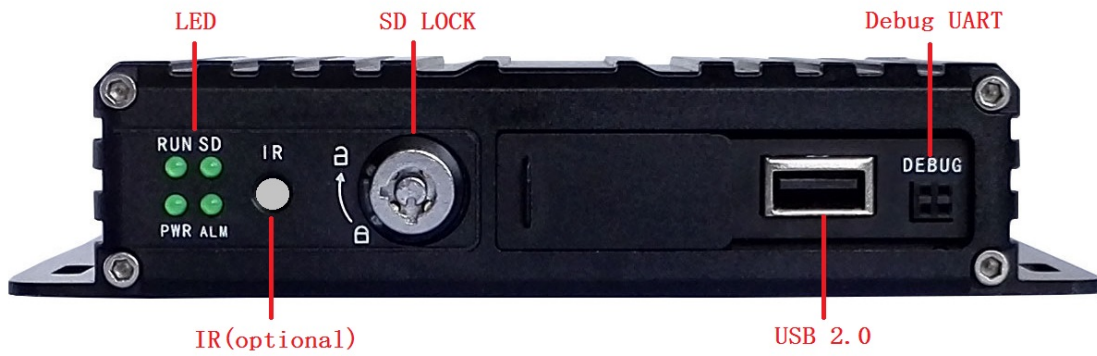

Back Panel:

