



# KC HiLITES

# GRAVITY® LED G6 Optical Inserts



## GRAVITY® LED G6 Optical Inserts

**20 Watt**

### FEATURES

Three Models Available:

- **SAE J581 & ECE-R112 CERTIFIED STREET LEGAL**  
Gravity® LED G6 Optical Insert Driving Beam– #42054:  
Each Light Rated at: 20-Watt; 2,300 Lumens;  
1,310 LUX @ 10 Meters; 131,000 Candela; Beam  
Distance - 724M
- Gravity® LED G6 Spot Beam Insert – #42134:  
Each Light Rated at: 20-Watt; 2,300 Lumens;  
2,150 LUX @ 10 Meters; 215,000 Candela; Beam  
Distance - 927M
- Gravity® LED G6 Wide-40 Beam Insert – #42056:  
Each Light Rated at: 20-Watt; 2,300 Lumens;  
390 LUX @ 10 Meters; 39,000 Candela; Beam  
Distance - 395M
- Patented Gravity® Reflective Diode (GRD) technology  
yields more controlled and farther reaching light beams
- 2 x Cree LEDs each light
- 5,000K Color Temperature
- IP 68 Rated, Fully self contained and sealed LED light  
housing
- Fits all 6" Halogen KC Daylighter® and Pro-Sport  
Housings
- Protected Against EMI Interference
- Backed by our 23 - Year Warranty



### KC Gravity® LED G6 Optical Inserts


Pair Pack Part #	Single Light Part #	Model / Description	Beam Pattern	Beam Distance (m)	Watts	Volts	Lumens	Width	Height	Depth
42054	42053	Gravity LED G6 Optical Insert	Driving - Clear	724	20	9 - 32	2,300	5.66"	5.66"	3.32"
42134	42133	Gravity LED G6 Optical Insert	Spot - Clear	927	20	9 - 32	2,300	5.66"	5.66"	3.32"
42056	42055	Gravity LED G6 Optical Insert	Wide-40 - Clear	395	20	9 - 32	2,300	5.66"	5.66"	3.32"



### PHOTOMETRICS

Total beam distance with 0.25 LUX - 927m


#### SPOT BEAM PATTERN

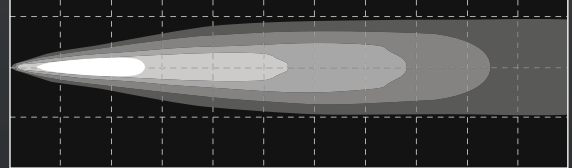

100M 300M 500M 700M

Total beam distance with 0.25 LUX - 724m


#### DRIVING BEAM PATTERN

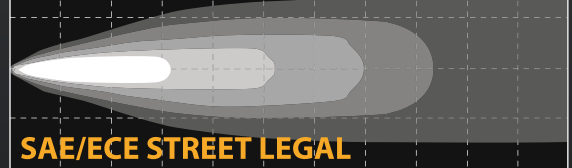

150M 300M 450M 600M


Total beam distance with 0.25 LUX - 395m

#### WIDE-40 BEAM PATTERN

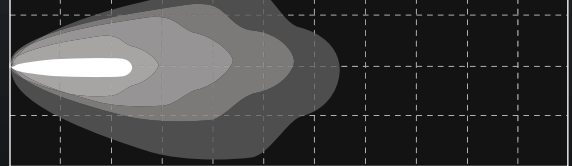

100M 300M 450M 600M

### DIMENSIONS

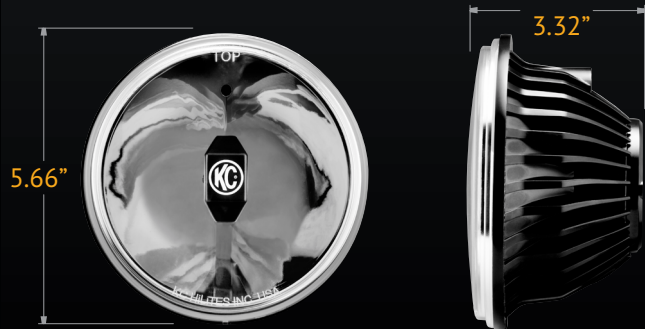

Discover other off-road lights on our website.