

Transmission Oil Cooler - GM
Installation Guide
2006-2010 (1240620)

DISCLAIMER OF LIABILITY

This agreement sets forth the terms and conditions for the use of this product. The installation of this product indicates that the Buyer has read and understands this agreement and accepts the terms and conditions.

Pacific Performance Engineering Inc., its distributors, employees, and dealers (the "Seller") shall not be responsible for the product's proper use and service. The buyer hereby waives all liability claims.

The Buyer hereby acknowledges no reliance on the Sellers skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise (including without any obligation of the Seller with respect to fitness, merchantability and consequential damages), or whether or not occasioned by the Seller's negligence. The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of equipment purchased. Under no circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment. The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt contact the manufacturer.

The Buyer is solely responsible for all warranty issues from the manufacturer.

LIMITATION OF WARRANTY

The Seller gives Limited Warranty as to description, quality, merchantability, and fitness for a particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall not be responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except by a written instrument signed by Seller and Buyer. The Warranty is limited to two (2) years from the date of sale and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Seller. Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product or any other contingent expenses.

Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment. In the event that the buyer does not agree with this agreement: the buyer may promptly return this product, in a new and unused condition in its original packaging, with a dated proof of purchase to the place of purchase within ten (10) days from date of purchase for a full refund. The installation of this product indicates that the buyer has read and understands this agreement and accepts its terms and conditions.

KIT INCLUDES:

- 1 Cooler
- 2 Top Brackets
- 1 Bottom Bracket
- 4 Allen Button Head
- 2 Bolts 5/16-18 3/4
- 2 Nuts 5/16-18



STEP 1

Remove retaining clips and radiator cover.



STEP 2

Remove radiator cover.



STEP 23

Remove the front grill bolts.



STEP 4

Pull grill clips.



STEP 5

Pull grill forward to detach from clip.



STEP 6

Remove the retaining clips and oil lines. Place towels or collection container below fitting to catch fluid.




STEP 7

Pull out oil lines.



STEP 8


Remove bracket bolts and cooler.

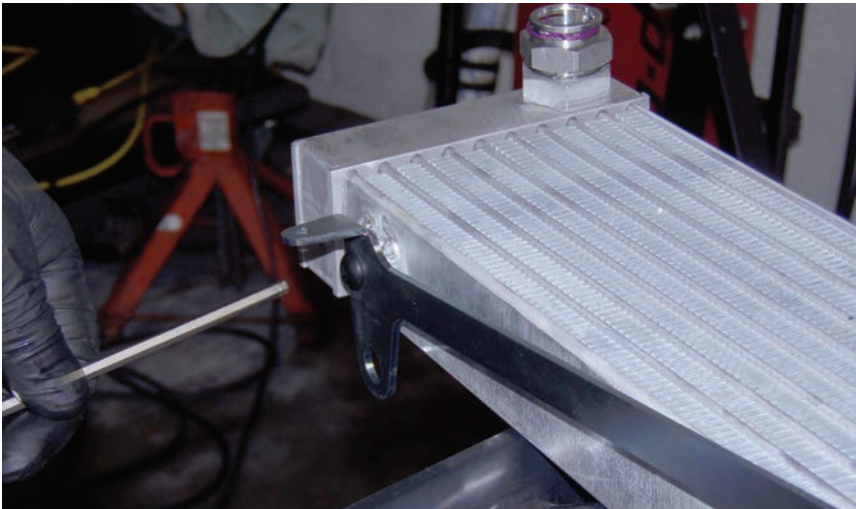

STEP 9

Install lower bracket and hardware.

NOTE: The brackets are shipped installed but need to be re-installed as shown to fit properly.

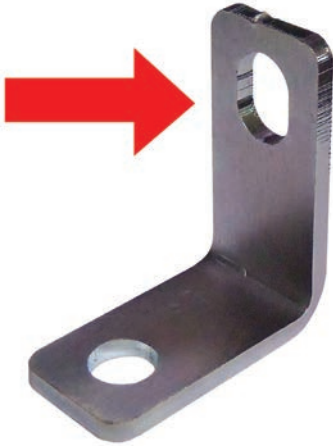

STEP 10

Install cooler bracket bolts. Be sure to place the bracket with the oval whole at the top and the round one at the bottom.



STEP 11

Install cooler lines and retainer clips.



STEP 12

Slide the clip holder into position.



STEP 13

Be sure to secure cooler lines into the plastic holder. Start the engine. Reinstall front grill. Check the fluid level. Check for leaks.