

INSTALLATION & CARE

2004-2008 FORD F150 SEQUENTIAL PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

| 1/4" Ratchet | Plastic Pry bar | 10 mm Socket | Trim Pad Remover |
|--|---|---|---|
|  |  |  |  |
| | | | |
| | | | |
| | | | |
| | | | |

PRODUCT NUMBER

2LHP-F15004-SQ-RS
 2LHP-F15004JM-SQ-RS
 2LHP-F15004G-SQ-RS
 2LHP-F15004SM-SQ-RS



LET'S START THE INSTALLATION




STEP 1

Remove the plastic fastener clip



STEP 2

Remove the 10mm headlight mounting bolt at the top

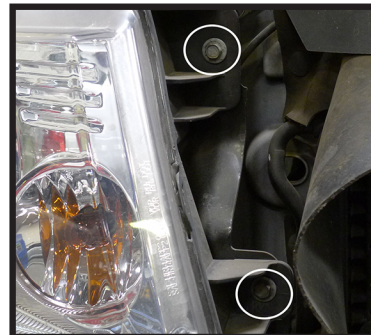

STEP 3

Remove the two 10mm headlight mounting bolts at the side of the grille



STEP 4

Unseat the factory headlight housing




STEP 5

Disconnect the headlight harness and remove the factory headlight housing



STEP 6

Remove the parking light socket and the signal light socket from the factory headlight housing

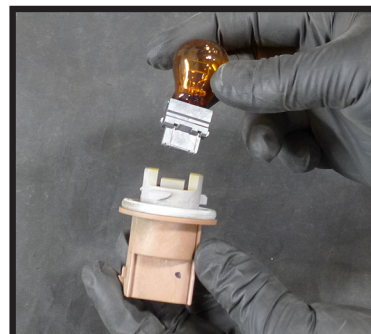

STEP 7

Remove the signal light bulbs from the socket



STEP 8

Install the signal light socket to the signal wire plug from the new headlight housing




STEP 9

Install the signal light socket to the new headlight housing



STEP 10

Install the parking light socket to the new headlight housing

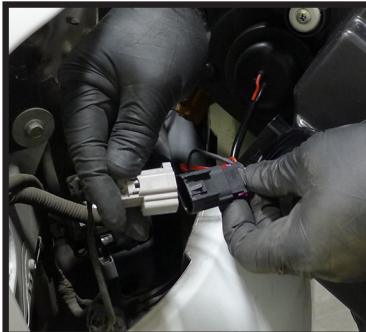


STEP 11

Connect the headlight harness



STEP 12

Seat the new headlight assembly in place

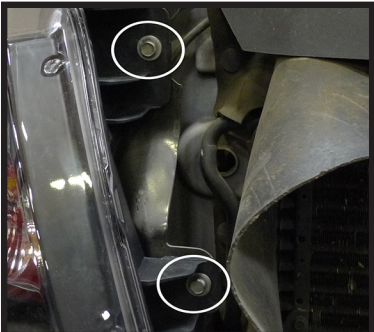

STEP 13

Reinstall the two 10mm headlight mounting bolts at the side of the grille




STEP 14

Reinstall the 10mm headlight mounting bolt at the top



STEP 15

Reinstall the plastic fastener clip

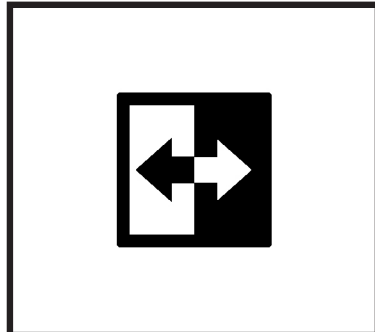

STEP 16

Please repeat the steps from 1 to 15 for the opposite side



STEP 17

Close the hood and complete the installation



INSTALLATION & CARE

2004-2008 FORD F150 SEQUENTIAL PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2004-2008 FORD F150 SEQUENTIAL PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

