


Shock Specifications


P/N	Ext. Length	Coll. Length	Tube Dia.	Upper Mount	Lower Mount
4600	24.84	12.82	2	EB1-B	EB1-C
4601	19.50	13.17	2	EB1-B	EB1-C
4602	21.50	13.75	2-3/8	S1	U-BRKT
4605	22.18	13.37	2	S50	EB1-C
4607	23.20	14.17	2-3/8	EB1-A	EB1-B
4608	26.20	15.67	2-3/8	BP8	EB1-A
4609	30.95	18.18	2-3/8	BP8	EB1-D
4610	23.20	14.17	2-3/8	EB1-A	EB1-A
4612	16.57	10.99	2-3/8	S1	U-BRKT
4615	16.27	10.50	2	S50	EB1-C
4620	23.20	14.17	2-3/8	EB1-A	EB1-B
4628	26.20	15.80	2-3/8	EB1-A	EB1-A
4639	29.78	17.59	2-3/8	EB1-A	EB1-D
4650	26.20	15.67	2-3/8	EB1-B	EB1-B
4651	27.91	16.55	2-3/8	EB1-B	EB1-A
4652	26.20	15.80	2-3/8	EB1-A	EB1-A
4700	25.22	15.22	2-3/8	S50	EB2
4701	23.20	14.17	2-3/8	EB1-A	EB1-D
4710	22.50	13.50	2-3/8	S50	EB2
4711	21.32	14.64	2	S1	EB1-D
4719	26.20	15.67	2-3/8	EB1-D	EB1-D
4750	27.40	16.22	2-3/8	S50	EB2
4751	29.43	17.24	2-3/8	S50	EB2
4752	26.20	15.60	2-3/8	S1	EB1-D
4757	27.91	16.55	2-3/8	EB1-D	EB1-D
4759	29.78	17.59	2-3/8	EB1-D	EB1-D
4760	29.78	17.59	2-3/8	EB1-B	EB1-A
4761	33.00	19.27	2-3/8	EB1-D	EB1-D
4762	29.78	17.59	2-3/8	BP8	EB1-B
4763	33.00	19.27	2-3/8	EB1-B	EB1-B
4764	33.00	19.27	2-3/8	BP8	EB1-B
4769	30.95	18.17	2-3/8	EB1-D	EB1-D
4799	29.78	17.59	2-3/8	EB1-C	EB1-C
4804	21.32	14.64	2	S50	EB1-D
4805	17.48	10.92	2-3/8	S1	EB1-A
4809	26.42	15.39	2	S1	EB1-A
4850	26.17	15.55	2-3/8	S1	EB2
4860	29.82	17.57	2-3/8	S1	EB1-A
4879	25.22	15.22	2-3/8	S50	EB2
4900	21.70	13.42	2	EB1-A	EB1-A
4920	25.95	15.42	2	EB1-A	EB1-B
4945	26.42	15.39	2	S1	EB1-B
4950	22.95	14.67	2	EB1-A	EB1-B
4951	25.95	15.42	2	BP18	EB1-A
4952	27.45	16.17	2 3/8	S50	EB2
4953	29.8	17.6	2-3/8	S1	EB1
4954	26.2	15.6	2-3/8	S1	EB1
4955	28.16	16.43	2	S1	EB1-B
4959	27.91	16.55	2 3/8	BP18	EB1-B
4965	24.66	14.79	2 3/8	S1	BP7
4971	26.20	15.67	2 3/8	EB1-A	EB1-A
4972	21.70	13.42	2	BP18	EB1-A
4974	25.95	15.42	2	BP18	EB1-A
4975	21.70	13.42	2	BP18	EB1-A
4977	29.78	17.59	2-3/8	EB1-C	EB1-C
4978	24.66	14.79	2 3/8	S1	EB1-A
4979	22.92	13.92	2 3/8	S1	EB1-A
4980	22.95	14.67	2	BP18	EB1-B
7603	20.80	14.30	2-3/8	O.E. BP	U-BRKT
7613	24.40	16.10	2-3/8	O.E. BP	U-BRKT
7768	29.78	17.59	2-3/8	EB1-D	EB1-D

Equivalent Nitro shocks are the same specifications

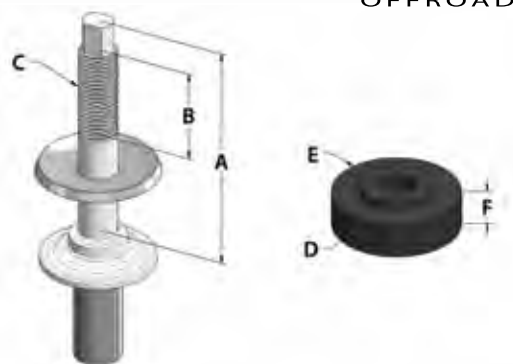

"S" Stem Bushing Mounting Dimensions


Code	A	B	C	D	E	F
S1	2-3/8"	1-1/8"	3/8"-24	1-1/4"	3/4"	1/2"
S50	3"	1-1/4"	1/2"-20	1-5/8"	15/16"	9/16"

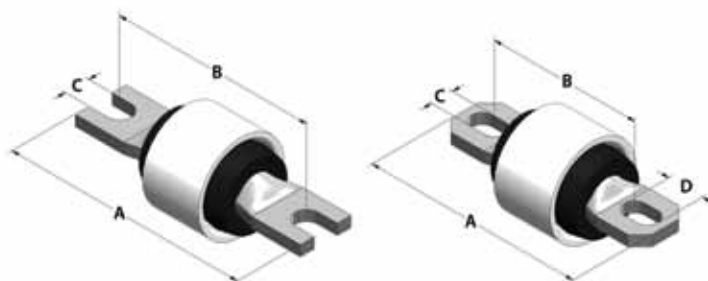

"BP" Bar Pin Mounting Dimensions

EB1 with bushing and bar pin

Code	Style	A	B	C	D
BP7	Closed	3-1/4"	2-1/2"	3/8"	7/16"
BP8	Closed	3-1/2"	2-7/8"	3/8"	7/16"
BP18	Open	3-3/4"	3-1/8"	3/8"	-

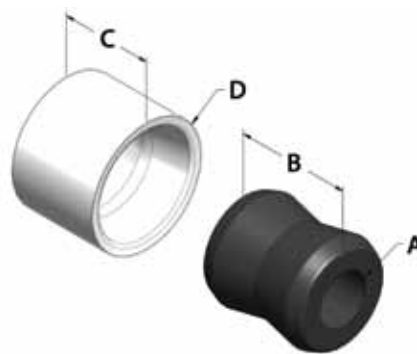

"EB" Eyelet Bushing Mounting Dimensions

Code	A	B	C	D (Dia)
EB1-A	5/8"	1-7/16"	15/16"	1-7/16"
EB1-B	5/8"	1-1/2"	15/16"	1-7/16"
EB1-C	3/4"	1-7/16"	15/16"	1-7/16"
EB1-D	3/4"	1-5/8"	15/16"	1-7/16"
EB1-E	5/8"	1-1/4"	15/16"	1-7/16"
EB2	3/4"	1-3/8"	1-1/4"	1-3/4"